

OLI



SANITARY SYSTEMS

GENERAL CATALOGUE 2019/2020

OLI

CAPTIONS

- Solid wall-Brick lined, floor standing wc
- Solid wall-Brick lined, Wall-hung wc
- Solid wall-Brick lined, Wall-hung washbasin
- Solid wall-Brick lined, Wall-hung urinal
- Dry wall, Wall-hung wc
- Dry wall, Wall-hung urinal
- Dry wall, Wall-hung washbasin
- Solid wall-Brick lined (rails or urinal dividers)
- Dry wall
- Supports up to 400kg
- Without maintenance
- Stop Fire
- 2 inlet valves
- SHT - Shower toilet
- 4/2l
- Start/Stop Flush
- Dual Flush
- Single Flush
- Saves up to 9l of water per day
- Mechanic actuation
- Pneumatic actuation
- Capacitive sensor
- Electronic actuation
- AC power-mains
- ColorADD
- One man assembly

- OLIpure System
- Hydroboost
- Water efficiency certification
- Economic
- 120mm thick
- 126mm thick
- 80mm thick
- 90mm thick
- 150mm thick
- 187mm thick
- 190mm thick
- Front or top actuation
- Reduce Mobility
- 100% Hygienic
- Vandal resistance
- Side water supply connection
- Bottom water supply connection
- Anti-condensation lining
- 2 year warranty
- 5 year warranty
- 10 year warranty
- 0.5mm thick
- 2mm thick
- 4mm thick

INDEX

Company information		6
BIM		21
ColorADD		22
Sanitary Systems		24
Easy move		28
Sanitary Module		32
In-wall flush cisterns		44
Frames		88
Control Plate		112
Commercial		144
Exposed flush cisterns		148
Universal mechanisms		158
OLIFILO		176
Spare parts		182
Packaging information		230
Warranty		254

COMPANY



65 YEARS OF RESEARCH, INNOVATION, DEVELOPMENT AND DESIGN

OLI - Sistemas Sanitários, S.A., founded in 1954 in Aveiro, is currently the Iberian leader in the production of cisterns. A wide range of solutions, such as control plates, in-wall and exposed flushing cisterns, and mechanisms (inlet valves and outlet valves) are sent daily to 80 countries on five continents. In addition, OLI has branches in Italy, Germany and Russia.

OLI flushing cisterns can be found in bathrooms all over the world, such as a hotel in Cuba, an Israeli hospital, a school in Spain, a football stadium in Qatar, a boat Hotel in Peru, or a restaurant in Italy. This international recognition is based on innovation.

From its large and modern industrial complex, in Aveiro, which operates 24 hours a day and seven days a week, 2 million cisterns and 2.8 million mechanisms are produced each year.

To compete globally OLI continuously invests in innovation, having applied, in the last five years, 10 million euros in Research and Development. Using patented technology and high quality manufacturing standards, OLI is constantly studying new and better solutions that increase water efficiency and accessibility for people with reduced mobility.

Currently, OLI has 34 active patents and according to the report of the European Patent Office for the last four years is among the Portuguese companies with the most patents in Europe and is considered the most innovative in the construction sector.

OLI's innovative work has been recognized with several distinctions, namely Archiproducts Design Awards, Good Design, Iconic Awards and Design Plus, and IF Design.


In 2019, OLI closed the year with a turnover of 59.3 million euros and a total of 431 employees in Portugal. OLI is part of the Italian group Silmar, which operates in 5 different yet integrated sectors: heating, aluminium processing, plumbing, electroplating and passive fire protection - and employs about 3,000 people.



RESEARCH & DEVELOPMENT

On a daily basis, and in partnership with universities, research centres and architects, OLI's Research and Development Centre works on the development of new ideas and solutions that increase water efficiency and accessibility for people with reduced mobility in the bathroom.

For 65 years OLI has been committed to growing sustainably, by investing in new products and markets. OLI's global success can be attributed in large part to the continuous effort to improve products and anticipate market needs.

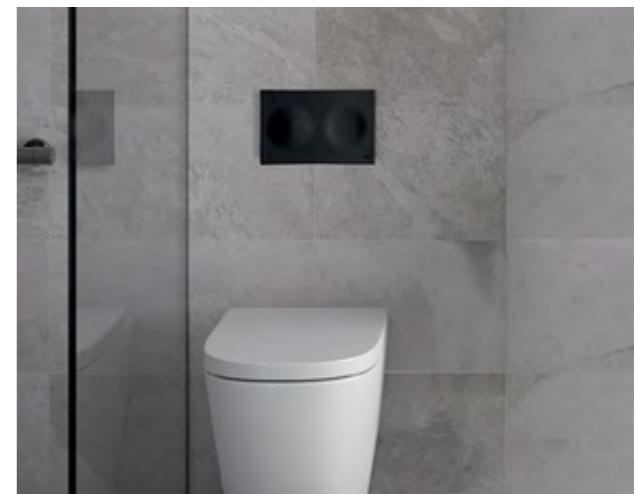

INNOVATION

Innovation defines OLI. The slogan "Inspired by water" manifests OLI's commitment to place innovation in the service of water preservation, with the overall goal of making the world a better place to live. In the last five years, OLI has invested 10 million euros in research and innovation. Currently, OLI has 45 active patents and is one of the Portuguese companies with most patents in Europe.



RESEARCH, DEVELOPMENT AND INNOVATION




DESIGN

In addition to being sustainable and accessible, OLI solutions are also characterized by their contemporary design with simple and refined lines.

OLI strives to offer sustainable products that not only have a strong functional component, but allow our customers to design a truly unique bathroom that they can be proud of.

AWARDS

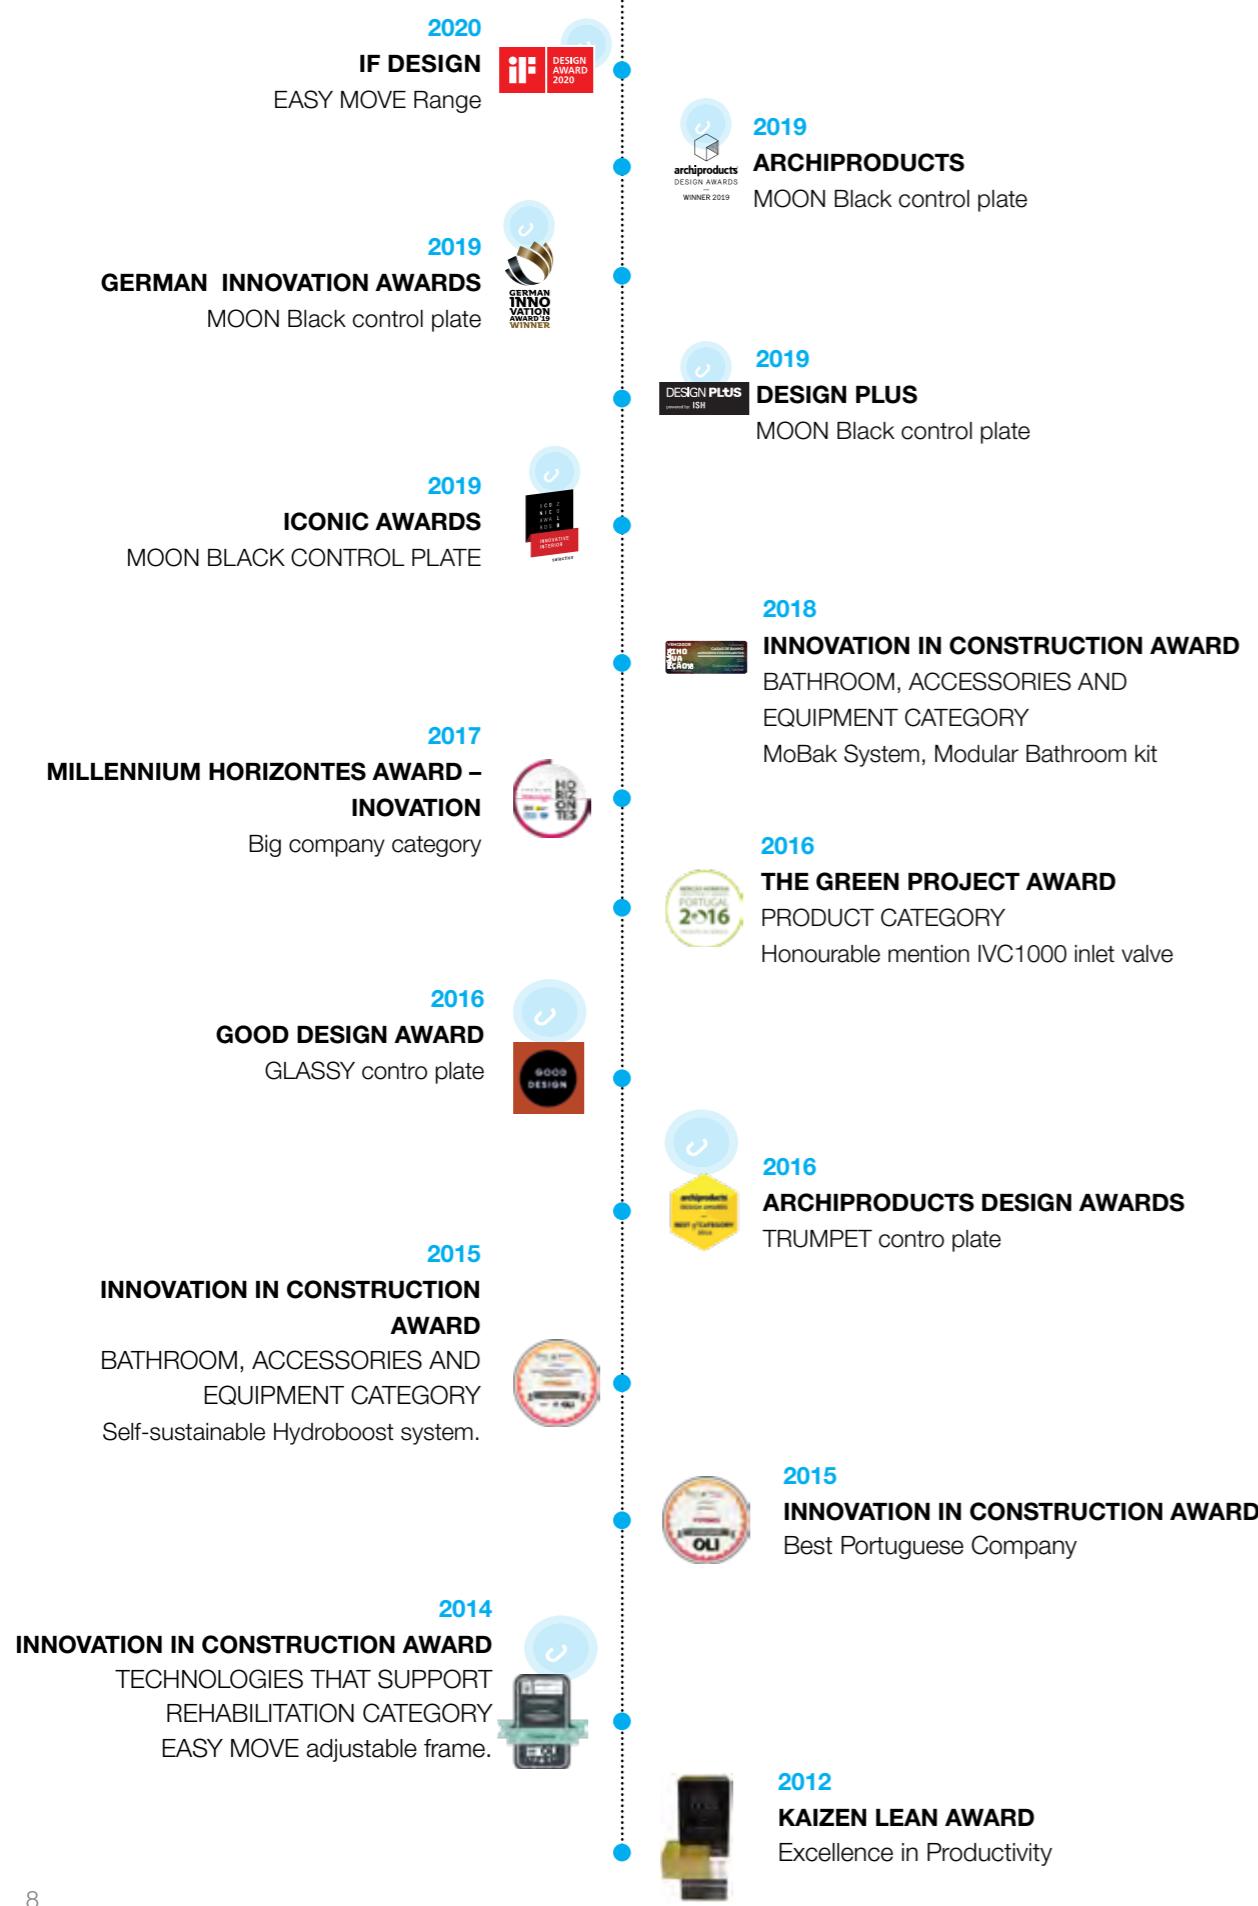

MARKETS

Built to surpass global standards.
Designed for your market.

OLI's commercial activities extend to all continents with a presence in over 80 international markets. Based on a well-structured research, development and innovation policy, our products are recognized and certified by the highest world standards, which motivates us to continue to invest in a personalized differentiation strategy.

Because each market is unique, OLI adapts its products to different requirements. This adaptability makes OLI competitive and stand out from the rest.

Some of the international markets where OLI is well known and appreciated: Portugal, France, Italy, Spain, Germany, Belgium, Holland, Austria, Finland, Denmark, Sweden, Czech Republic, Poland, Romania, Russia, Morocco, Egypt, Tunisia, Algeria, Senegal, Cote d'Ivoire, Saudi Arabia, Jordan, United States of America, Brazil, Mexico, Australia, Indonesia and China.





01

02

03



06

07

01 VODAFONE BUILDING
Oporto, Portugal

02 LISBON CRUISE PORT
Lisbon, Portugal

03 PINE CLIFFS SHERATON HOTEL
Albufeira, Portugal

04 ICHILOV MEDICAL CENTER HOSPITAL
Tel Aviv, Israel


05 BAYAT PLAZA
Jeddah, Saudi Arabia

06 RADIANCE HOTEL
Sydney, Australia

07 VIÑA VIK HOTEL
Millahue, Chile



08 AMAZON DISCOVERY HOTEL
Iquitos, Peru

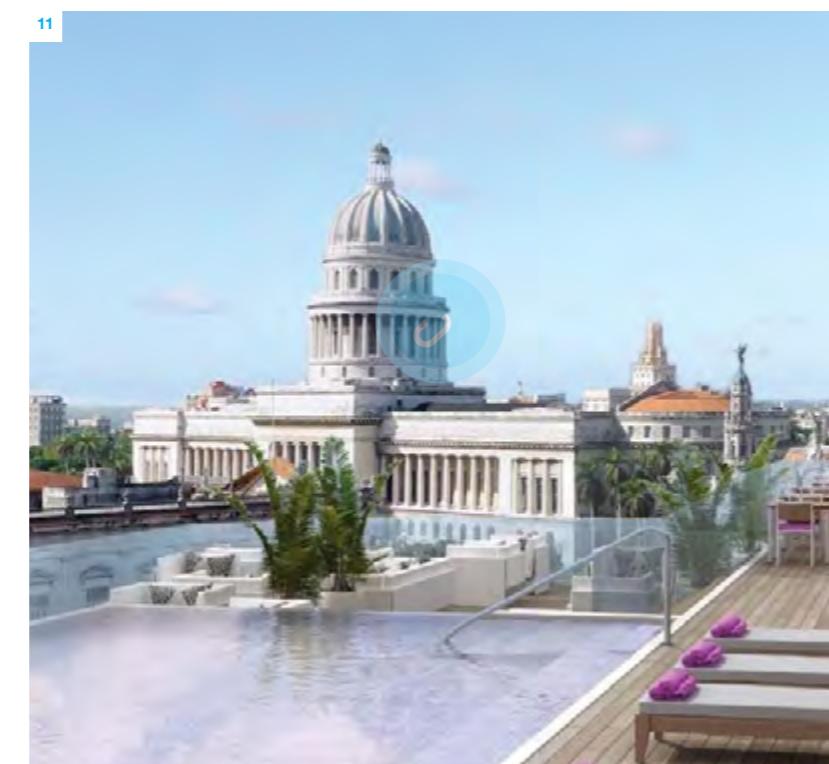

09 IBIS HOTEL
Madrid, Spain



11 GRAN HOTEL MANZANA KEMPINSKI LA HABANA
Havana, Cuba


12 DOUBLETREE HILTON HOTEL
Milan, Italy



13 ERBIL ROTANA HOTEL
Erbil, Iraq



14 SINA VILLA MEDICI HOTEL
Florence, Italy

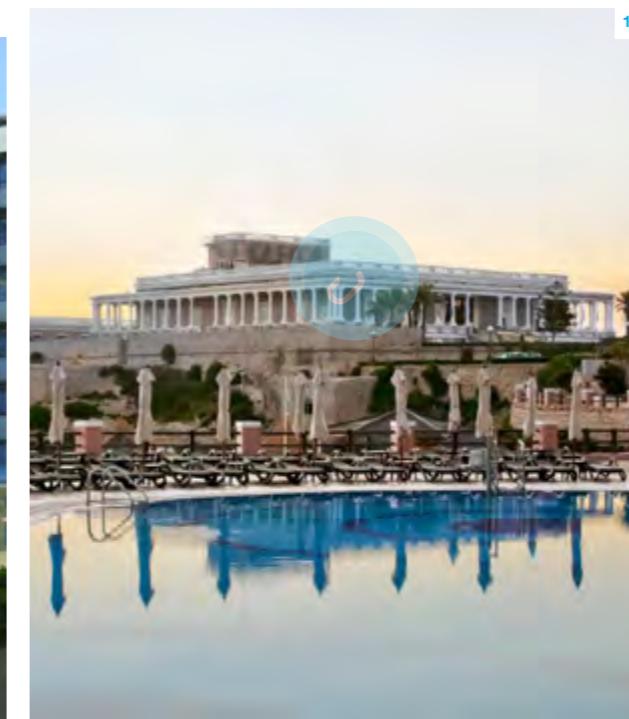

15 TEL AVIV SAVIDOR MAIN TRAIN STATION
Tel Aviv, Israel

16 DRAGONARA CASINO
St. Julian's, Malta

WATER-SAVING SOLUTIONS


INLET VALVE (see product range on page 162)

FILLS THE CISTERN FASTER

Delayed refill system

QUIETER

Operating noise reduced

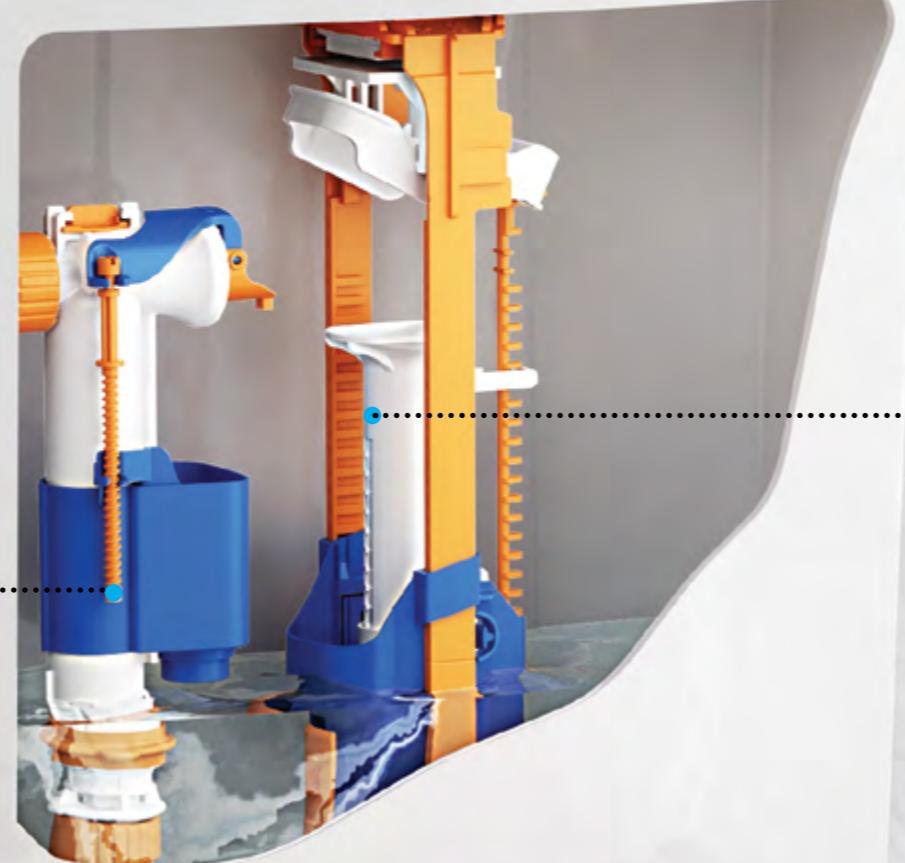

OLI74 PLUS 4/2l

Save water with every flush.

When compared to OLI74 PLUS 6/3l you save 2 litres with every full flush and 1 litre with every half flush.

(see product range on page 70)



OLI74 PLUS with 2 INLET VALVES

Save water by connecting your cistern to a second water source, such as rainwater.

(see product range on page 70)



OLI74 PLUS 4/2l with 2 INLET VALVES

Combines both of the water efficient solutions above to help you maximize your water saving.

(see product range on page 70)



OUTLET VALVE

(see product range on page 167)

ADDITIONAL WATER-SAVING

Adjust the volume of water flushed.



DUAL FLUSH

Water-saving of approximately 50%.



OLIpure®



- Universal:**
Compatible with existing WC liquid* disinfectants on the market.
- Long lasting:**
Storage capacity of 450ml.

*The use of chlorine-free liquid detergents with a viscosity between 150 and 300 cp (at 20 ° C) is recommended.

OLIPure is a closed-storage system with a disinfectant that is placed inside the cistern and with each flush releases the disinfectant into the toilet. The disinfectant is always in a closed circuit and never comes in contact with the water in the cistern, unlike traditional cleaning tablets that come in contact with water. This reduces the risk of the disinfectant damaging components in the cistern.

OLIPure creates a fresh atmosphere and provides an immediate feeling of comfort and cleanliness, without any effort.

AVAILABLE WITH




OLI74
MECHANICAL
OLIPURE



OLI120
MECHANICAL
OLIPURE



EXPERT
MECHANICAL
OLIPURE



OLIPURE KIT
(Add OLIPURE to existing in-wall installation systems).



NARROW
OLIPURE



GLAM
OLIPURE



QUARZO OLIPURE



OLIPURE KIT FOR CERAMIC CISTERNS
(Add OLIPURE to ceramic cisterns).

EASY MOVE



Committed to developing a safe and comfortable bathroom for all, OLI has several solutions designed for people with reduced mobility, the elderly and children.

From frames that adjust the height of the toilet or washbasin to control plates designed for hygiene that allow the user to activate the flush without touching the control plate or to flush the toilet with their foot or elbow.



EASY MOVE
(see more detail on [page 28](#))



LIFT-UP SUPPORT RAIL
(see more detail on [page 31](#))



EASY DUAL
(see more detail on [page 131](#))



FOOT CONTROL
(see more detail on [page 133](#))



BUILDING INFORMATION MODELING (BIM)

OLI is committed to being at the forefront of development in the construction sector. BIM is the new standard of design and construction. BIM facilitates the transfer of information between stakeholders and enables integrated management throughout the product life cycle.

With this methodology, OLI aims to boost the efficiency and creativity of construction projects through cooperative work with architects, engineers, contractors and owners, as well as reinforce its commitment to continuous innovation and the creation of a bathroom that doesn't waste water, is safe and accessible for all.

OLI will continue to progressively expand their library and offer customers a wide range of Sanitary System solutions. OLI's products are available as BIM objects in Graphisoft Archicad®, Autodesk Revit® and SketchUp®.

Visit our website for more information and to download our BIM files: www.ol-world.com



www.ol-world.com




ColorADD

Innovation and Social Vanguard

OLI is the first sanitary systems company in the world to adopt ColorADD, a unique, universal and transversal code that allows colour blind people to correctly identify colours.


Primary colours. Black and white

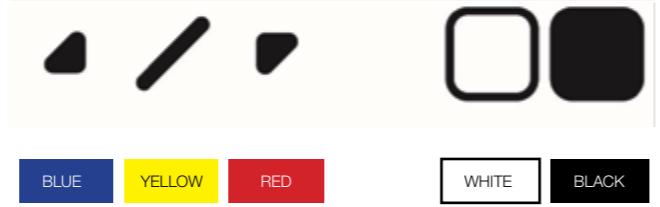

Colour blindness is a visual disorder of inherited transmission characterized by the inability to distinguish colours.

There are around 350 million colour blind people in the world. ColorADD represents the 3 Primary Colours through graphic symbols. Based on the concept of "Colour Addition", symbols can relate to each other and all colours can be graphically identified. White and Black indicate Light and Dark shades of Colour.

Colour Addition Concept

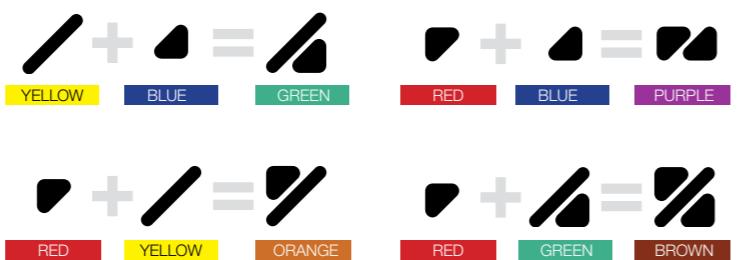

ColorADD code



OLI Catalog Colours



White	Black Black Soft Touch	Matt chrome Brushed	Anthracite Grey Soft Touch	Red	Taupe	Gold	Polished chrome

SANITARY SYSTEMS

656506
TREND
Matt chrome



EASY MOVE
[Page 26](#)



SANITARY MODULE
[Page 30](#)



IN-WALL FLUSH CISTERNS
[Page 44](#)



ACCESSORIES
In-wall flush cisterns
[Page 101](#)



CONTROL PLATES
[Page 112](#)



COMMERCIAL
[Page 144](#)



EXPOSED FLUSH CISTERNS
[Page 148](#)



UNIVERSAL MECHANISMS
[Page 158](#)

EASY MOVE

Adjustable frame



Compatibility




Wide range of control plates

Hydroboost®*	MECHANIC	PNEUMATIC*	ELECTRONIC*
AC	Glam Metal Ria Stop Plain	Blink Trend	Electra I
Moon	Narrow Ino-x Ria iPlate	Trumpet Salina	Electra II
Glassy	Globe Slim Oceania	Oceania	Electra III
Tribe			

* Transformation kit page 103.

measurements are in mm 27

EASY MOVE washbasin

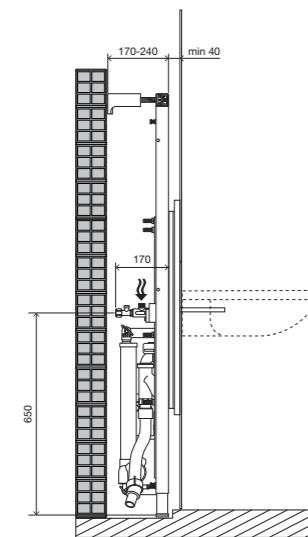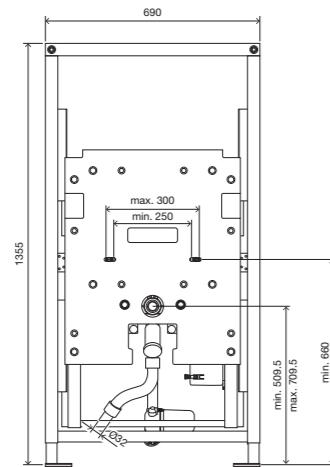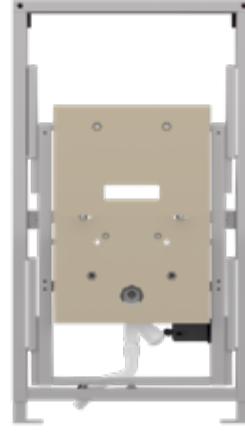




CODE	DESCRIPTION
881673	EASY MOVE Washbasin
883046	<input type="radio"/> <input checked="" type="checkbox"/> Glass White
883045	<input checked="" type="radio"/> <input type="checkbox"/> Glass Black

- Adjustable frame for washbasin;
- Ergonomic system that is adjustable in height by 300mm;
- Compatible with the most wall hungs washbasins;
- Silent electric engine;
- Power supply 220V/110 (50/60Hz);
- Power: 350 Watt;
- Insulation: IP66;
- Movement velocity: of 28mm/s;
- Sheet of tempered glass 6mm thick;
- Push power: 6000N (ca 600kgf);
- Limit switch;
- Frame tested for a 400kg load;
- Easy and quick installation with fast fit system;
- Available tempered glass bottom cover in black or white;
- Frame and glass are sold separately;
- Global warranty of 10 years and 2 years on electronic components.

Included

- Mirror;
- Flexible outlet pipe;
- Concealed siphon;
- Wireless remote actuation;
- Electric engine;
- 2x G 1/2" water connections;
- 2x flexible hoses;
- Wall-fixing material and washbasin fixing material.

EASY MOVE WC

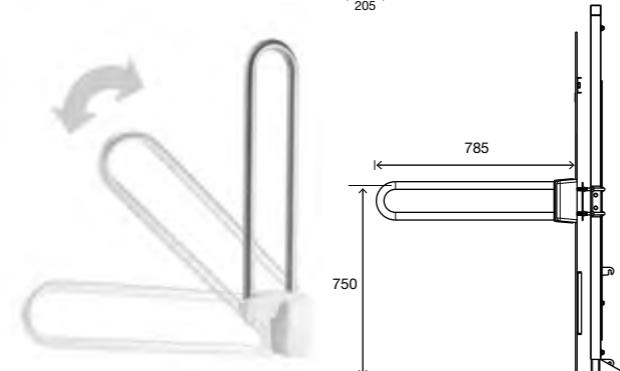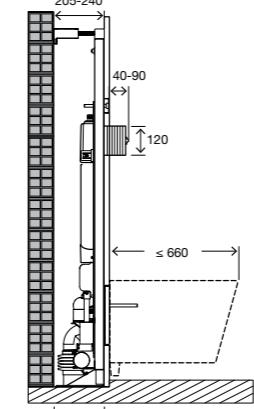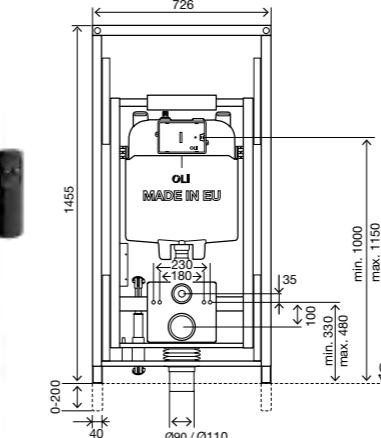

CODE	DESCRIPTION
005308	EASY MOVE
601831	<input type="radio"/> <input checked="" type="checkbox"/> EASY MOVE glass White
601833	<input checked="" type="radio"/> <input type="checkbox"/> EASY MOVE glass Black
879143	Lift-up support rails

Note: To order this product you must order 005308 Easy Move and either 601831 Easy Move glass white or 601833 Easy Move glass black. Code 879143 Lift-up support rails is optional.



QR-INOX
Hung wc
[Page 35](#)



QR-INOX
Floor
[Page 36](#)



QR-INOX
Free-standing
[Page 37](#)



QR-TOTAL
Hung wc
[Page 38](#)



QR-TOTAL
Floor
[Page 39](#)



SEAL BOX
Hung wc
[Page 41](#)



SEAL BOX
Floor
[Page 43](#)





SANITARY MODULE



NO-TOUCH

With No-touch technology there is no need to touch the module to activate the flush. The tempered glass is equipped with capacitive sensors and the user can choose between the half flush and the full flush by simply approaching their hand to the corresponding light symbol. With No-touch, hygiene and convenience are taken to a new level, by adopting a clean and sustainable technology.

Hydroboost

AC POWER-MAINS



PNEUMATIC


The pneumatic version comes with a stainless steel tilt selector button in a matt finish for activating the flush. The user can choose between the full flush and the half flush by pressing the tilt selector button. The button's rounded shape provides the sanitary module with nobility and distinctiveness. With the pneumatic version you are a touch of a button away from the perfect bathroom.





QR-INOX

Sanitary Module - hung wc

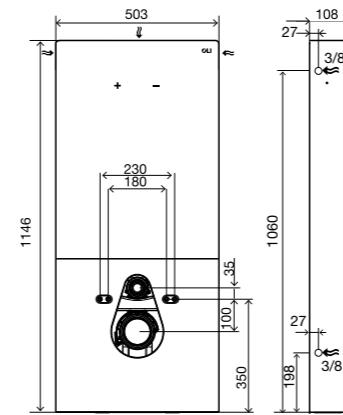

CODE	DESCRIPTION
061565	QR-INOX White button Pneumatic hung wc
878815	QR-INOX White no-touch cap Hydroboost hung wc
878640	QR-INOX White no-touch cap AC hung wc
061568	QR-INOX Black button Pneumatic hung wc
878834	QR-INOX Black no-touch cap Hydroboost hung wc
878641	QR-INOX Black no-touch cap AC hung wc
878137	QR-INOX Gold button Pneumatic hung wc
878164	QR-INOX Taupe button Pneumatic hung wc
878168	QR-INOX Anthracite button Pneumatic hung wc
878172	QR-INOX Red button Pneumatic hung wc

- Dual flush Sanitary Module 6/3 litres;
- Compatible with all wall-hung WC pans;
- One piece, brushed stainless steel lateral frame;
- 6mm tempered glass front panel (split in two parts);
- Delayed refilling – PLUS technology inlet valve;
- Silent inlet valve;
- Supplied with anti-condensation lining;
- 4 external water entry positions and one back water entry position available;
- 108mm thick;
- QR-INOX Button - Pneumatic actuation;
- QR-INOX No-touch – Capacitive sensor with Hydroboost or AC;
- Equipped with OLI74 PLUS cistern;
- EN 14055 CE marking;
- Global warranty of 10 years and 2 years on the electronic components.



Included

- WC pan fixing material;
- Internal frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve;
- Flexible hose ½" / ¾", 250mm.



QR-INOX

Sanitary Module - Floor

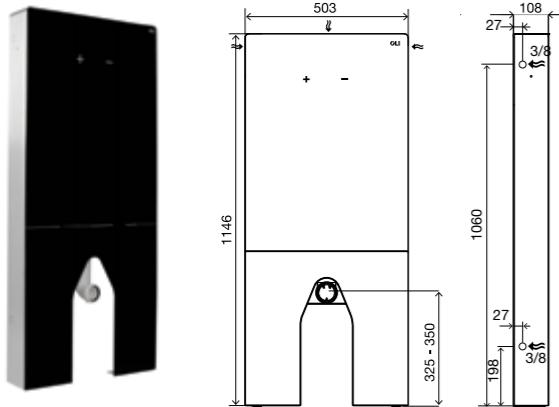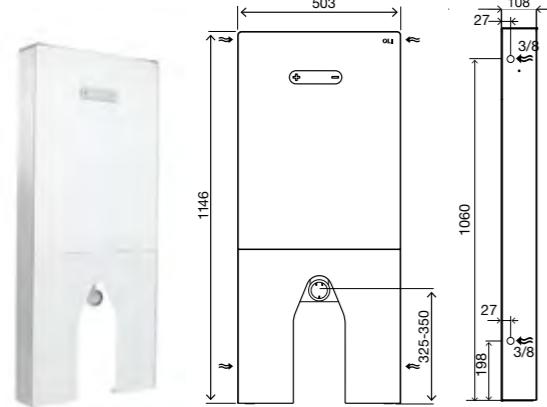

- Dual flush Sanitary Module 6/3 litres;
- Compatible with all floor mounted WC pans;
- One piece, brushed stainless steel lateral frame;
- 6mm tempered glass front panel (split in two parts);
- Delayed refilling – PLUS technology inlet valve;
- Silent inlet valve;
- Supplied with anti-condensation lining;
- 4 external water entry positions and one back water entry position available;
- 108mm thick;
- QR-INOX Button - Pneumatic actuation;
- QR-INOX No-touch – Capacitive sensor with Hydroboost or AC;
- Equipped with OLI74 cistern;
- EN 14055 CE marking;
- Global warranty of 10 years and 2 years on the electronic components.

Included



- Internal frame fixing material;
- WC connection pipe Ø45;
- Flush pipe included (220 to 570mm);
- G ½" stop valve.



CODE	DESCRIPTION
061562	○ □ QR-INOX White button Pneumatic floor
878835	○ □ QR-INOX White no-touch cap Hydroboost floor
878642	○ □ QR-INOX White no-touch cap AC floor
061563	● ■ QR-INOX Black button Pneumatic floor
878836	● ■ QR-INOX Black no-touch cap Hydroboost floor
878643	● ■ QR-INOX Black no-touch cap AC floor

QR-INOX

Sanitary Module - Free-standing

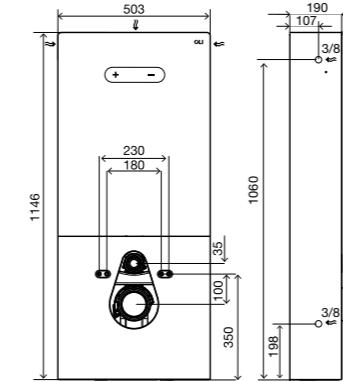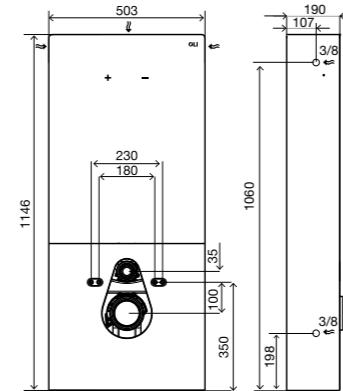

- Dual flush Sanitary Module 6/3 litres;
- Compatible with all wall-hung WC pans;
- One piece, brushed stainless steel lateral frame;
- 6mm tempered glass front panel (split in two parts);
- Delayed refilling – PLUS technology inlet valve;
- Silent inlet valve;
- Supplied with anti-condensation lining;
- 4 external water entry positions and one back water entry position available;
- 190mm thick freestanding model;
- QR-INOX Button - Pneumatic actuation;
- QR-INOX No-touch – Capacitive sensor with Hydroboost or AC;
- Equipped with OLI74 PLUS cistern;
- EN 14055 CE marking;
- Global warranty of 10 years and 2 years on the electronic components.

Included


- WC pan fixing material;
- Internal frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve;
- Flexible hose ½" / ¾", 250mm.




CODE	DESCRIPTION
879059	○ □ QR-INOX White button Pneumatic Free-standing
879061	○ □ QR-INOX White no-touch cap Hydroboost Free-standing
879151	○ □ QR-INOX White no-touch cap AC Free-standing
879060	● ■ QR-INOX Black Pneumatic Free-standing
879062	● ■ QR-INOX Black no-touch cap Hydroboost Free-standing
879152	● ■ QR-INOX Black no-touch cap AC Free-standing

QR TOTAL

Sanitary Module - hung wc

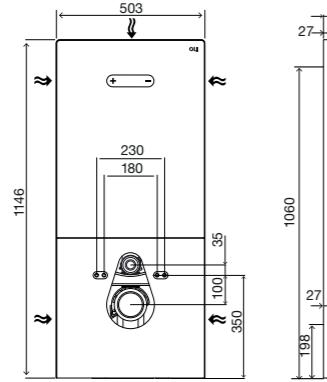

- Dual flush Sanitary Module 6/3 litres;
- Compatible with all wall-hung WC pans;
- One piece brushed stainless steel lateral frame, black or white coated;
- 6mm tempered glass front panel (split in two parts);
- Delayed refilling – PLUS technology inlet valve;
- Silent inlet valve;
- Supplied with anti-condensation lining;
- 4 external water entry positions and one back water entry position available;
- 108mm thick;
- QR-INOX Button - Pneumatic actuation;
- QR-INOX No-touch - Capacitive sensor with Hydroboost or AC;
- Equipped with OLI74 PLUS cistern;
- EN 14055 CE marking;
- Global warranty of 10 years and 2 years on the electronic components.

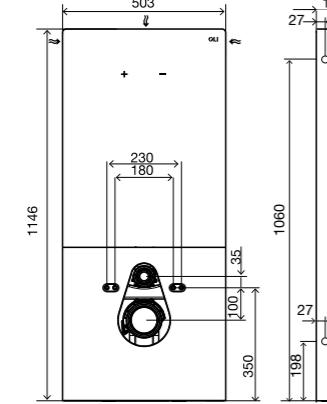**Included**


- WC pan fixing material;
- Internal frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve;
- Flexible hose ½" / ¾", 250mm.




CODE	DESCRIPTION
878152	<input type="radio"/> <input checked="" type="checkbox"/> QR TOTAL White button Pneumatic hung wc
878153	<input type="radio"/> <input checked="" type="checkbox"/> QR TOTAL White no-touch cap Hydroboost hung wc
878633	<input type="radio"/> <input checked="" type="checkbox"/> QR TOTAL White no-touch cap AC hung wc
878141	<input checked="" type="radio"/> <input checked="" type="checkbox"/> QR TOTAL Black button Pneumatic hung wc
878147	<input checked="" type="radio"/> <input checked="" type="checkbox"/> QR TOTAL Black no-touch cap Hydroboost hung wc
878631	<input checked="" type="radio"/> <input checked="" type="checkbox"/> QR TOTAL Black no-touch cap AC hung wc

QR TOTAL

Sanitary Module - Floor

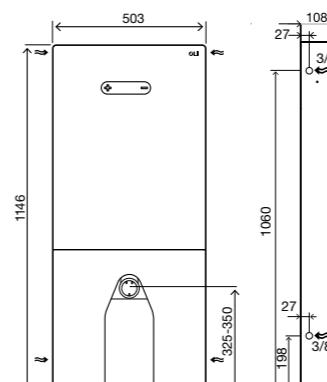

- Dual flush Sanitary Module 6/3 litres;
- Compatible with all floor mounted WC pans;
- One piece brushed stainless steel lateral frame, black or white coated;
- 6mm tempered glass front panel (split in two parts);
- Delayed refilling – PLUS technology inlet valve;
- Silent inlet valve;
- Supplied with anti-condensation lining;
- 4 external water entry positions and one back water entry position available;
- 108mm thick;
- QR-INOX Button - Pneumatic actuation;
- QR-INOX No-touch - Capacitive sensor with Hydroboost or AC;
- Equipped with OLI74 PLUS cistern;
- EN 14055 CE marking;
- Global warranty of 10 years and 2 years on the electronic components.

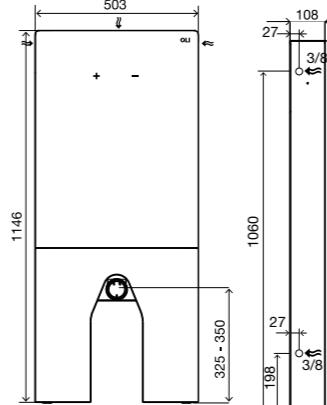**Included**

- Internal frame fixing material;
- WC connection pipe Ø45;
- Flush pipe included (220 to 570mm);
- G ½" stop valve.




CODE	DESCRIPTION
878150	<input type="radio"/> <input checked="" type="checkbox"/> QR TOTAL White button Pneumatic floor
878151	<input type="radio"/> <input checked="" type="checkbox"/> QR TOTAL White no-touch cap Hydroboost floor
878632	<input type="radio"/> <input checked="" type="checkbox"/> QR TOTAL White no-touch cap AC floor
878139	<input checked="" type="radio"/> <input checked="" type="checkbox"/> QR TOTAL Black button Pneumatic floor
878140	<input checked="" type="radio"/> <input checked="" type="checkbox"/> QR TOTAL Black no-touch cap Hydroboost floor
878630	<input checked="" type="radio"/> <input checked="" type="checkbox"/> QR TOTAL Black no-touch cap AC floor




SEAL BOX

Sanitary Module - hung wc

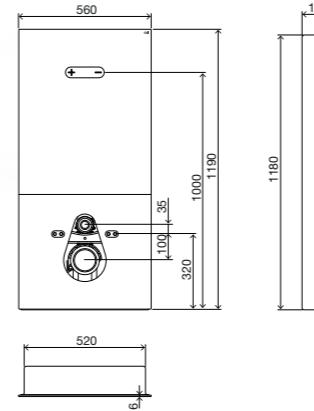

- Dual flush 6/3 litres;
- In-wall installation with glass front panel visible;
- Solid wall or drywall installation;
- 6mm tempered glass front panel (split in two parts);
- Painted tubular frame;
- Delayed refilling – PLUS technology inlet valve;
- Silent valve;
- Supplied with anti-condensation lining;
- 120mm thick;
- Available in pneumatic and no-touch actuation
- Equipped with OLI74 PLUS cistern;
- EN 14055 CE marking;
- Frame tested for 400kg load;
- Global warranty of 10 years and 2 years on the electronic components.

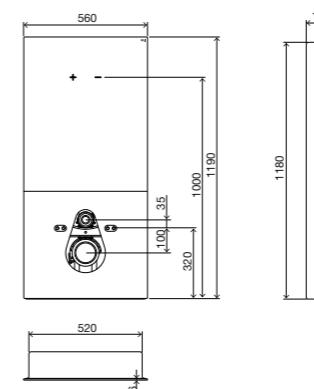


Included

- Leakage prevention box in ABS and PMMA;
- WC pan fixing material;
- Internal frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and 90/110 adaptor;
- G ½" stop valve.



CODE	DESCRIPTION
880372	○ □ SEAL BOX White button Pneumatic hung wc
880451	○ □ SEAL BOX White no-touch cap Hydroboost hung wc
880453	○ □ SEAL BOX White no-touch cap AC hung wc
880450	● ■ SEAL BOX Black button Pneumatic hung wc
880452	● ■ SEAL BOX Black no-touch cap Hydroboost hung wc
880454	● ■ SEAL BOX Black no-touch cap AC hung wc


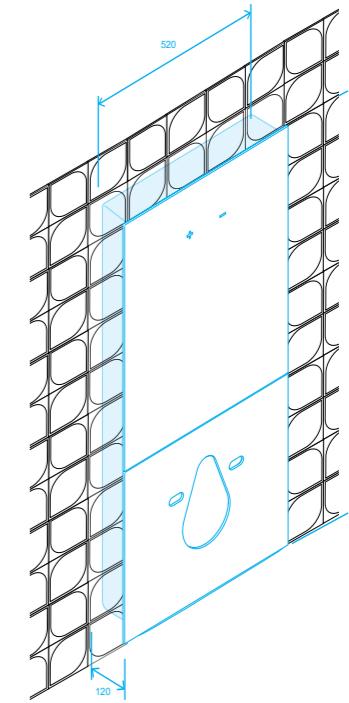


880450
SEAL BOX
Black button Pneumatic hung wc



SEAL BOX


Sanitary Module - Floor

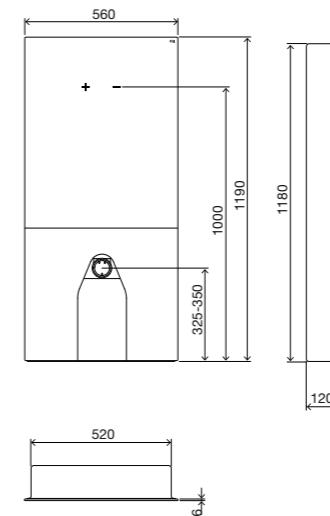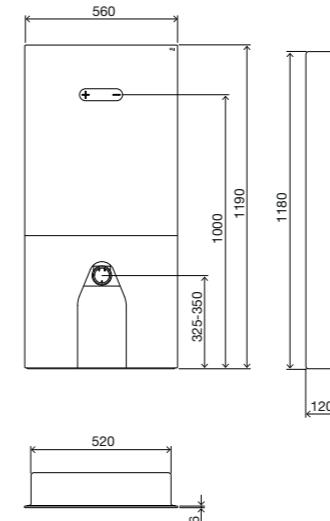

- Dual flush 6/3 litres;
- In-wall installation with glass front panel visible;
- Solid wall or drywall installation;
- 6mm tempered glass front panel (split in two parts);
- Painted tubular frame;
- Delayed refilling – PLUS technology inlet valve;
- Silent valve;
- Supplied with anti-condensation lining;
- 120mm thick;
- Available in pneumatic and no-touch actuation
- Equipped with OLI74 PLUS cistern;
- EN 14055 CE marking;
- Global warranty of 10 years and 2 years on the electronic components.

Included

- Leakage prevention box in ABS and PMMA;
- Internal frame fixing material;
- WC connection pipe Ø45;
- Flush pipe included (220 to 570mm);
- G ½" stop valve.



CODE DESCRIPTION

880455	<input type="checkbox"/>	SEAL BOX White button Pneumatic floor
880457	<input type="checkbox"/>	SEAL BOX White no-touch cap Hydroboost floor
880459	<input type="checkbox"/>	SEAL BOX White no-touch cap AC floor
880456	<input checked="" type="checkbox"/>	SEAL BOX Black button Pneumatic floor
880458	<input checked="" type="checkbox"/>	SEAL BOX Black no-touch cap Hydroboost floor
880460	<input checked="" type="checkbox"/>	SEAL BOX Black no-touch cap AC floor

IN-WALL INSTALLATION SYSTEMS



OLI120 PLUS

Direct Double
Simflex
Block
Sanitarblock
Free-standing
[Page 55](#)

126



OLI120

Direct
Simflex
Sanitarblock
Free-standing
[Page 63](#)

126



OLI74 PLUS

2 inlet valves
Direct Double
Simflex
Sanitarblock
Free-standing
[Page 69](#)

80



OLI80

Direct
Simflex
Sanitarblock
[Page 75](#)

80



EXPERT PLUS

Direct
Simflex
Sanitarblock
Free-standing
[Page 79](#)

150



QUADRA PLUS

Direct
Simflex
Sanitarblock
Free-standing
[Page 85](#)

187

IN-WALL INSTALLATION SYSTEMS

DIRECT



This wall installation system should be selected when installing the cistern in a solid wall that will be brick-lined with a **floor-standing toilet**.



OLI120 PLUS **OLI120**
126mm thick 126mm thick



OLI80 **EXPERT PLUS** **QUADRA PLUS**
80mm thick 150mm thick 187mm thick



SIMFLEX




This wall installation system should be selected when installing the cistern in a solid wall that will be brick lined with a **wall-hung toilet**.



OLI120 PLUS **OLI120** **OLI74 PLUS**
128mm thick 128mm thick 80mm thick



OLI80 **EXPERT PLUS**
80mm thick 150mm thick

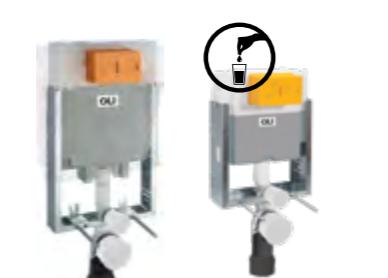

BLOCK



This installation system is for wall-hung toilets and should be used when installing the cistern in a solid wall that will be brick-lined.



OLI120 PLUS BLOCK
144mm thick



SANITARBLOCK



The Sanitarblock installation system is suitable for applications in drywall with load bearing walls. The main advantage of the system is the ease and speed of safely installing a cistern with a **wall-hung toilet**. The Sanitarblock system is equipped with a Fast-fit system for fixing the frame to the load bearing walls.

Fast-fit



- wall fixation system included;
- simplifies the fixation of the frame to the wall;
- allows for a fast and precise levelling of the frame;
- patented system.



OLI120 PLUS **OLI120** **OLI74 PLUS**
126mm thick 126mm thick 120mm thick



OLI80 **EXPERT PLUS** **QUADRA PLUS**
120mm thick 150mm thick 187mm thick



FREE-STANDING



The Sanitarblock free-standing installation system is used in drywall applications with a **wall-hung toilet**. The main advantage of the system is the ease and speed of safely installing a concealed cistern with a wall hung toilet without the need of any type of wall.



OLI120 PLUS **OLI120** **OLI74 PLUS**
180mm thick 180mm thick 180mm thick



EXPERT PLUS **QUADRA PLUS**
180mm thick 187mm thick



DOUBLE



The Sanitarblock free-standing double installation system is ideal for drywall application with a **wall-hung toilet**. This system includes one frame with two cisterns which allows the application of a wall-hung toilet "back-to-back". This makes the Sanitarblock free-standing double ideal for commercial spaces.




OLI74 PLUS - Double
240mm thick






OLI120 PLUS - Double
wc/washbasin/urinal
240mm thick



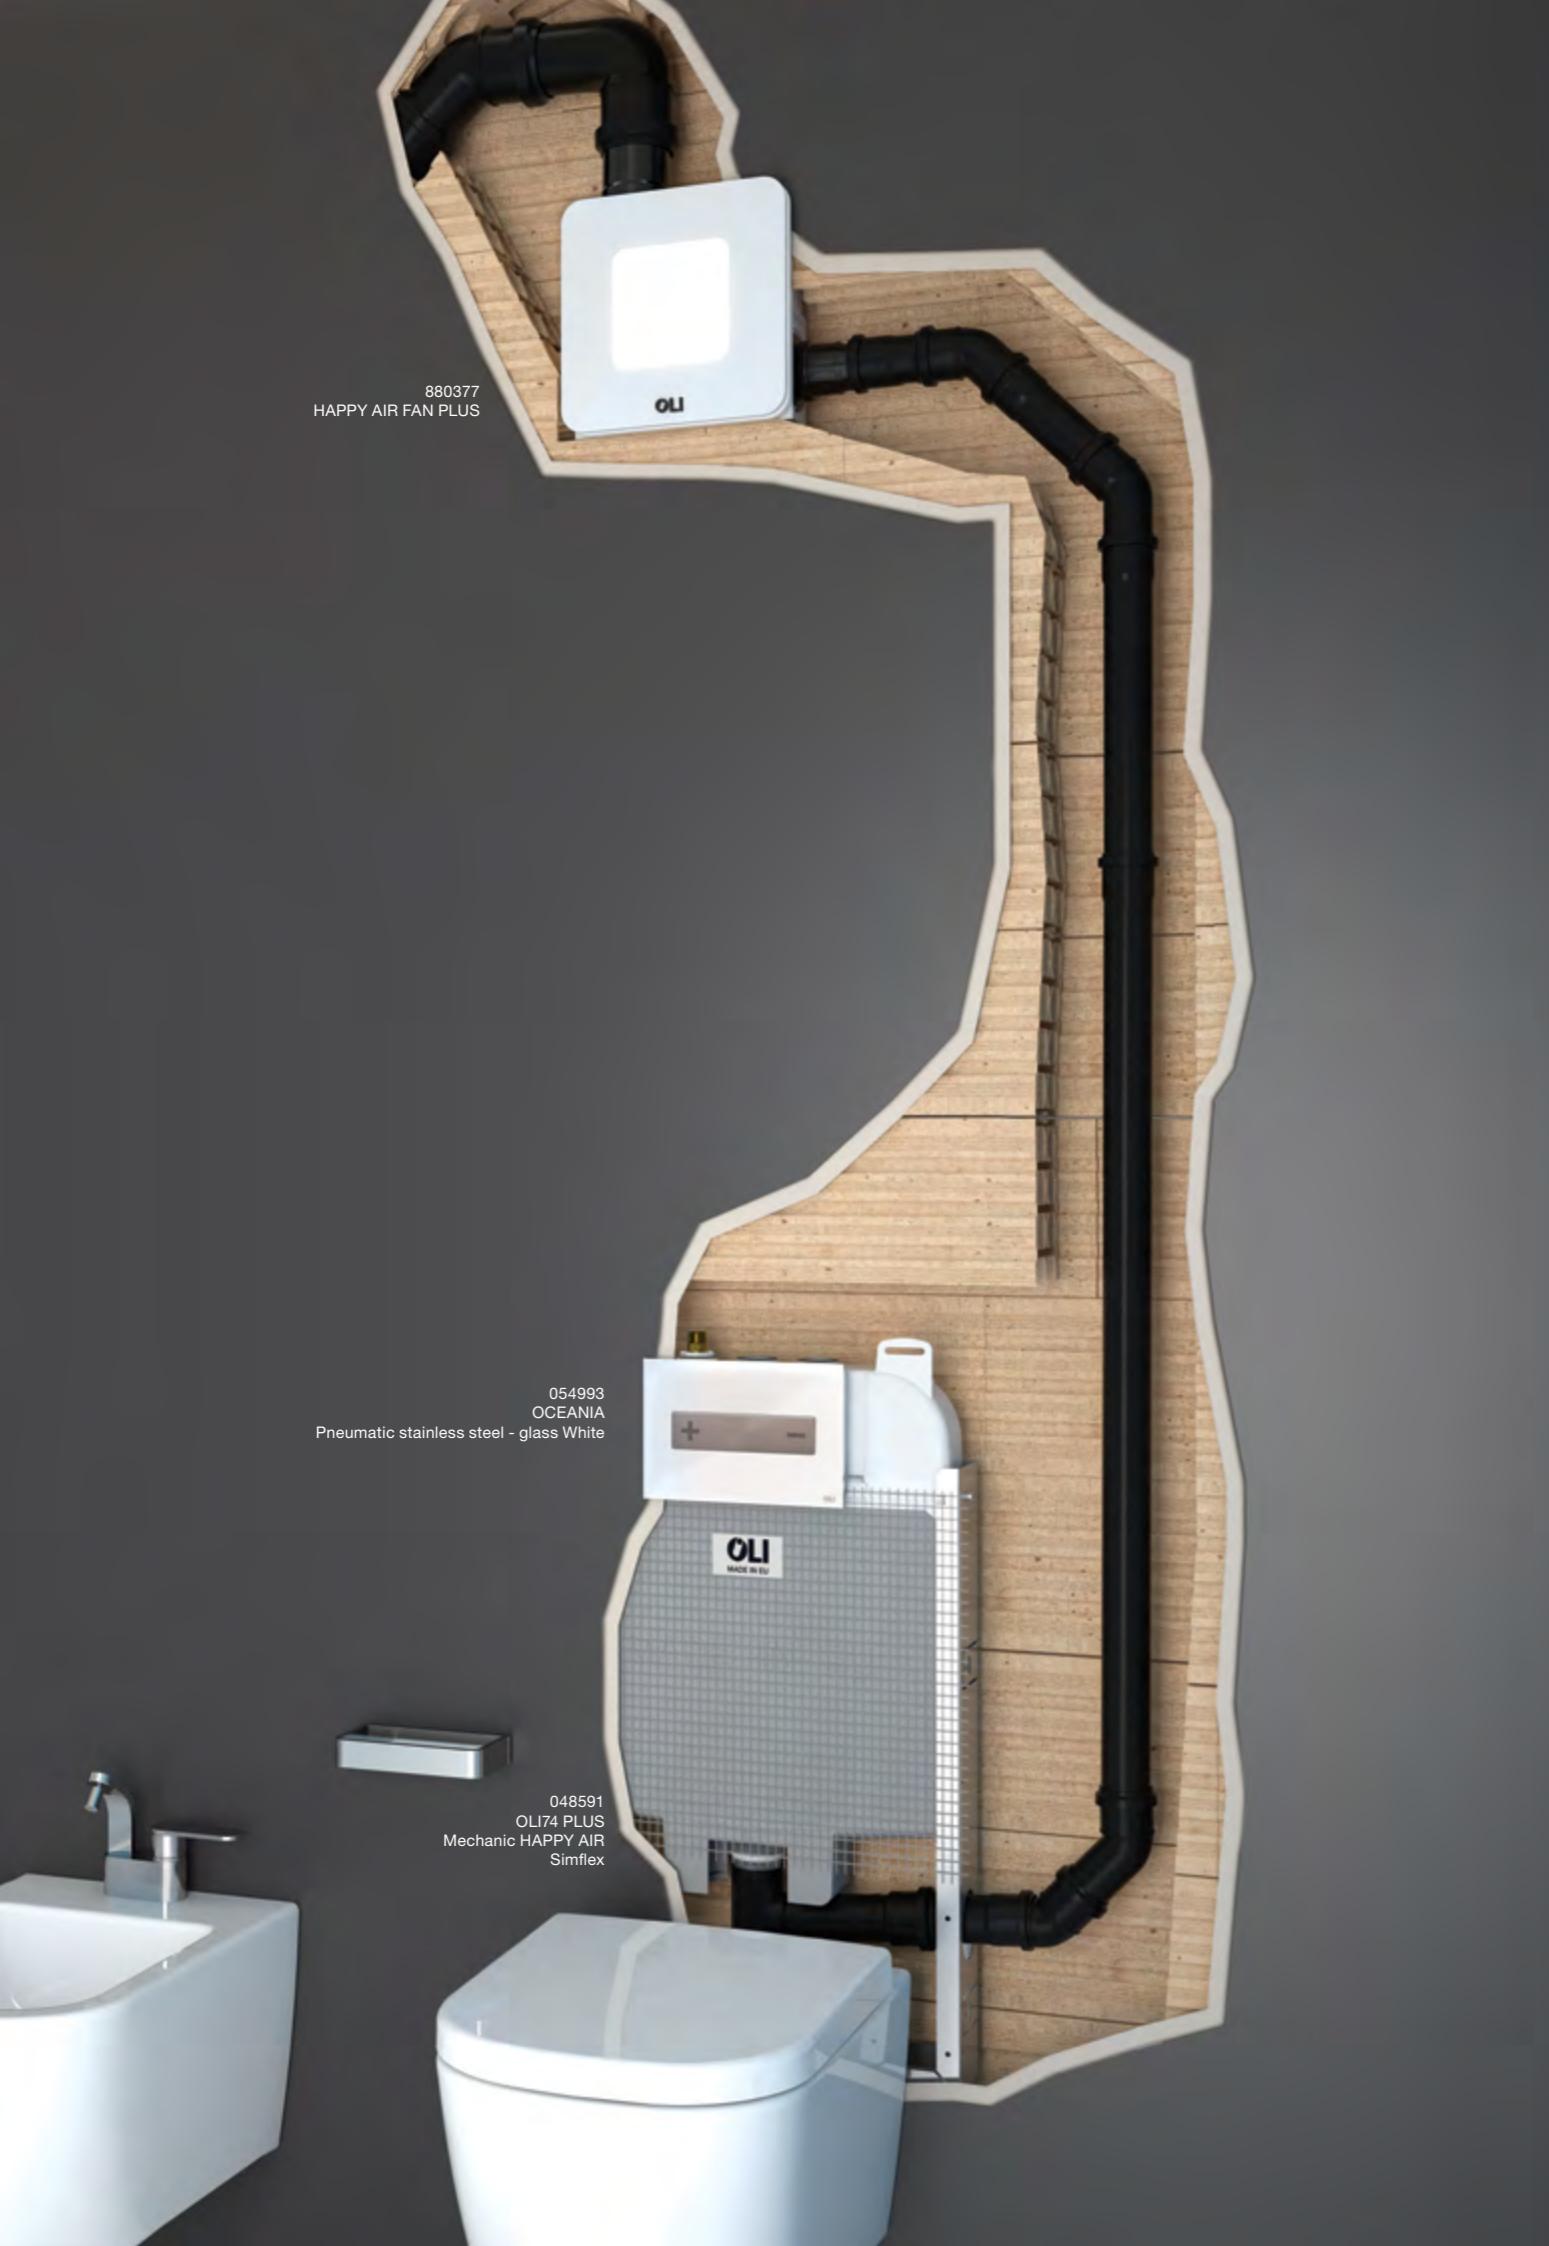

HAPPY AIR

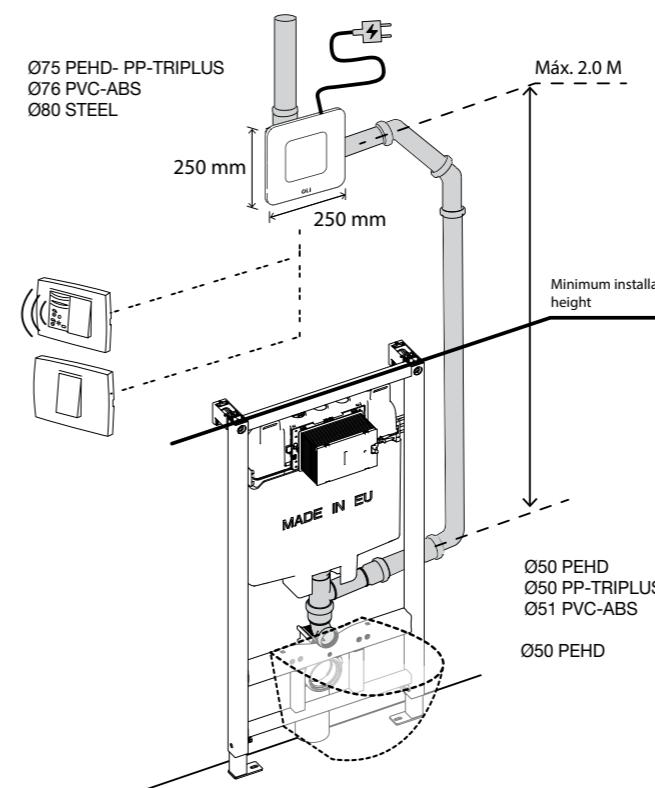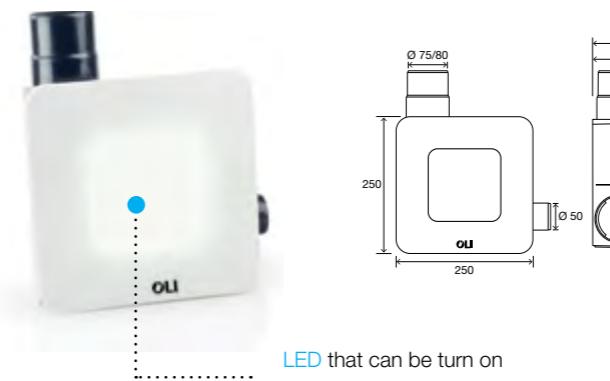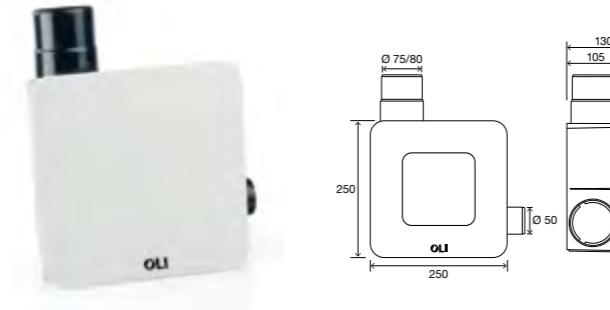

Note: Happy air performance may be different depending on the WC.

HAPPY AIR
High extraction capacity (80m³/h)
Removes 30% of odours
Removes 70% of condensation

- Melanine filter – noise reduction;
- Turns off as soon as the client turns off the switch;
- 220V/50Hz;
- Capacity 65m³/h- 22W 31dB;
- Capacity 80m³/h- 29W 35dB.

HAPPY AIR PLUS
High extraction capacity (100m³/h)
Removes 30% of odours
Removes 70% of condensation

- Melanine filter – noise reduction;
- 960 Lumen LED that can be turn on independently of the extractor;
- Humidity sensor that can be set to automatically turn on;
- Possible to adjust the operating time after the user switches the switch off (2min-20min);
- Capacity 100m³/h- 12W 34dB;
- Capacity 80m³/h- 20W 38dB.

General features


- Dual function on a single aspiration fan;
- It can be installed on the wall or on the ceiling;
- Reduced noise <38 dB(A);
- High aspiration capacity 65-80 m³/h (HAPPY AIR) and 85-100m³/h (HAPPY AIR PLUS) (30% odours, 70%condensation);
- Power Supply: 220V (50Hz); Insulation: IP35;
- The extractor fan operates at 220 V/50 Hz
- Activated by switch or sensor;
- 2 to 20 minute delay switch-off possible with HAPPY AIR PLUS;
- Anti-back flow valve;
- Paintable cover panel;
- Compatible with OLI74 Plus Happy Air, OLI120 plus Happy Air and all its control plates (see compatible control plates page 118);
- Global warranty of 10 years and 2 years on the electronic components.

Happy Air system Includes:


- Inner air filter;
- Fixing material;
- Electrical fan;
- Fan housing;
- Covering plate.

OLI120 PLUS HAPPY AIR

Direct



- Solid wall installation;
- Compatible with all floor mounted WC pans;
- See general features for OLI120 PLUS;
- See general features for HAPPY AIR system.




CODE DESCRIPTION

883014	OLI120 PLUS Mechanic Happy Air
880376	HAPPY AIR FAN
880377	HAPPY AIR FAN PLUS




OLI120 PLUS HAPPY AIR

Simflex



- Solid wall installation;
- Compatible with all wall-hung WC pans;
- 128 mm thick;
- See general features for OLI120 PLUS;
- See general features for HAPPY AIR system.




CODE	DESCRIPTION
883015	OLI120 PLUS Mechanic Simflex Happy Air
880376	HAPPY AIR FAN
880377	HAPPY AIR FAN PLUS



OLI120 PLUS HAPPY AIR


Sanitarblock



- Solid wall or drywall installation;
- Compatible with all wall-hung WC pans;
- Wall hung toilets up to 660mm long;
- Easy and quick installation;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 200mm;
- 126 mm minimum thick;
- See general features for OLI120 PLUS;
- See general features for HAPPY AIR system.

Happy air fan Includes:

- Happy Air system;
- Inner air filter;
- Fixing material;
- Electrical fan;
- Fan housing;
- Covering plate.




CODE DESCRIPTION

883016	OLI120 PLUS Mechanic Sanitarblock Happy Air
880376	HAPPY AIR FAN
880377	HAPPY AIR FAN PLUS



OLI120 PLUS HAPPY AIR


Free-standing



- Solid wall or drywall installation;
- Compatible with all wall-hung WC pans;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- 180 mm minimum thick;
- See general features for OLI120 PLUS;
- See general features for HAPPY AIR system.

Happy air fan Includes:

- Happy Air system;
- Inner air filter;
- Fixing material;
- Electrical fan;
- Fan housing;
- Covering plate.




CODE DESCRIPTION

883017	OLI120 PLUS Mechanic Free-standing Happy Air
880376	HAPPY AIR FAN
880377	HAPPY AIR FAN PLUS

OLI74 PLUS HAPPY AIR

Direct

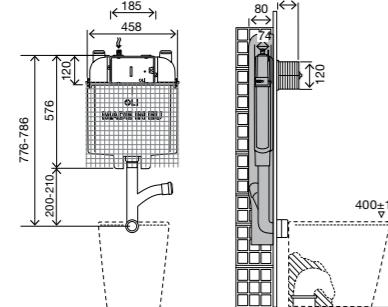

CODE	DESCRIPTION
101775	OLI74 PLUS Mechanic HAPPY AIR
880376	HAPPY AIR FAN
880377	HAPPY AIR FAN PLUS



- Solid wall installation;
- Compatible with all floor mounted WC pans;
- See general features for OLI74 PLUS;
- See general features for HAPPY AIR system.

Happy air fan Includes:

- Happy Air system;
- Inner air filter;
- Fixing material;
- Electrical fan;
- Fan housing;
- Covering plate.

OLI74 PLUS HAPPY AIR

Sanitarblock

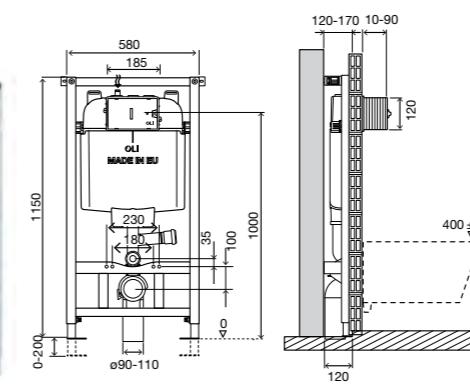

CODE	DESCRIPTION
048590	OLI74 PLUS Mechanic HAPPY AIR Sanitarblock
880376	HAPPY AIR FAN
880377	HAPPY AIR FAN PLUS


- Solid wall or drywall installation;
- Compatible with all wall-hung WC pans;
- Easy and quick installation;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 200mm;
- 120 mm minimum thick;
- See general features for OLI74 PLUS;
- See general features for HAPPY AIR system.

Happy air fan Includes:

- Happy Air system;
- Inner air filter;
- Fixing material;
- Electrical fan;
- Fan housing;
- Covering plate.

OLI74 PLUS HAPPY AIR

Simflex

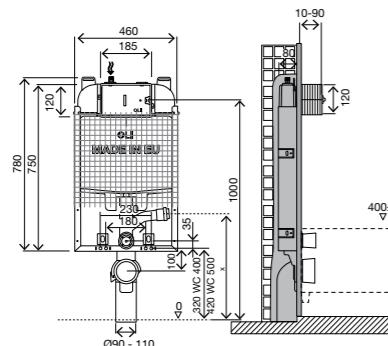

CODE	DESCRIPTION
048591	OLI74 PLUS Mechanic HAPPY AIR Simflex
880376	HAPPY AIR FAN
880377	HAPPY AIR FAN PLUS


- Solid wall installation;
- Compatible with all wall-hung WC pans;
- 80 mm thick;
- See general features for OLI74 PLUS;
- See general features for HAPPY AIR system.

Happy air fan Includes:

- Happy Air system;
- Inner air filter;
- Fixing material;
- Electrical fan;
- Fan housing;
- Covering plate.

OLI74 PLUS HAPPY AIR

Free-standing

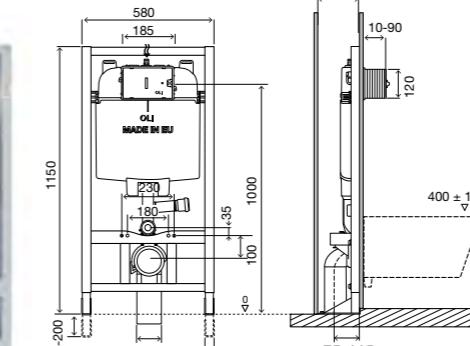

CODE	DESCRIPTION
101774	OLI74 PLUS Mechanic HAPPY AIR Free-standing
880376	HAPPY AIR FAN
880377	HAPPY AIR FAN PLUS

- Solid wall or drywall installation;
- Compatible with all wall-hung WC pans;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- 180 mm minimum thick;
- See general features for OLI74 PLUS;
- See general features for HAPPY AIR system.

Happy air fan Includes:

- Happy Air system;
- Inner air filter;
- Fixing material;
- Electrical fan;
- Fan housing;
- Covering plate.


With all the best OLI technology integrated, allows not only an easy and fast installation, as well as a perfect maintenance.



OLI120 PLUS



126mm Thick

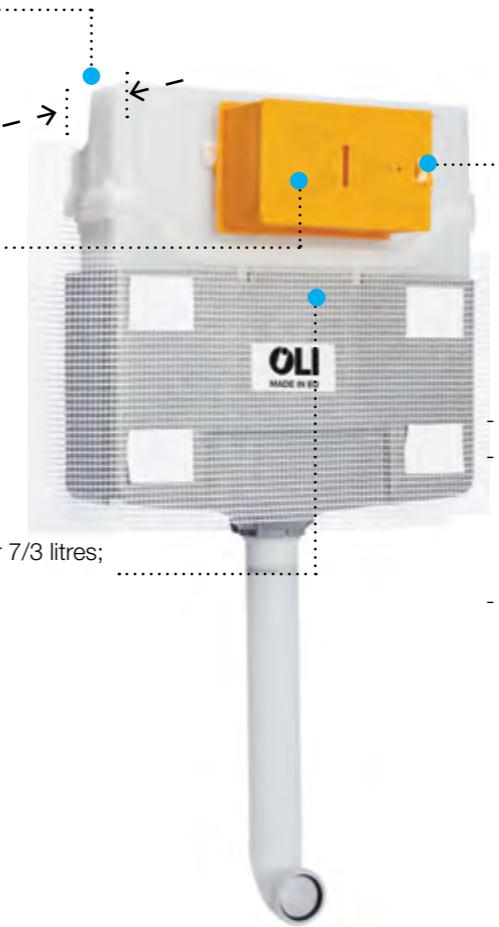

Total Access

- Easier maintenance
Due to a transparent protection plate with incorporated levers
- Removable stop valve

Outlet Valve


- Dual Flush, pre-set for 6/3 litres;
- Adjustable flush volumes: 4/2, 6/3 or 7/3 litres;
- Outlet valve with silicone seal.



SAVES UP TO 9L OF WATER PER DAY

PLUS inlet valve

- Water-saving inlet valve;
- Equipped with a revolutionary delayed refill system: starts filling the cistern only when the flush valve is closed;
- Silent – Class 1 certified.



OLIpure®

- **Universal:**
Compatible with existing WC liquid* disinfectants on the market.
- **Long lasting:**
Storage capacity of 450ml.

Compatibility


Wide range of control plates

NO-TOUCH	MECHANIC	PNEUMATIC	ELECTRONIC
Moon	Glam	Plain	Ria
Glassy	Narrow	Metal	Blink
Tribe	Globe	Trumpet	Trend
	Slim	iPlate	Salina
	River	Oceania	Karisma
			Electra I
			Electra II
			Electra III

*The use of chlorine-free liquid detergents with a viscosity between 150 and 300 cp (at 20 ° C) is recommended.

OLI120 PLUS

Direct

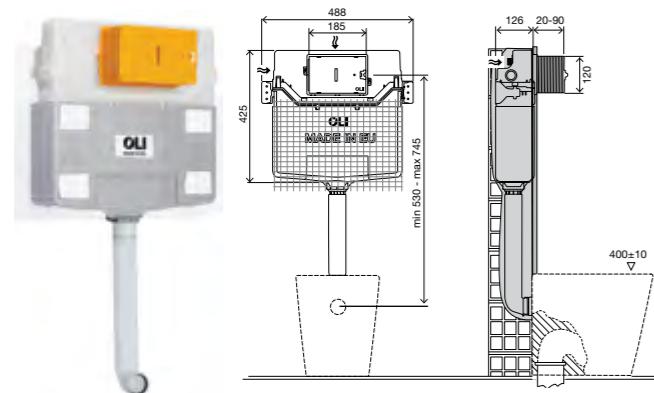

CODE	DESCRIPTION
099941	OLI120 PLUS Mechanic
880777	OLI120 Mechanic OLIpure
153964	OLI120 PLUS Pneumatic
154075	OLI120 PLUS Electronic
878843	OLI120 PLUS cap Hydroboost
878619	OLI120 PLUS cap AC

General features


- Dual flush 6/3 litre in-wall cistern (adjustable to 4/2 or 7/3 litres);
- Polypropylene (PP) cistern highly resistant and inalterable to thermal stress;
- Delayed refilling – PLUS technology inlet valve;
- Silent valve class 1 certified;
- Mechanical, Pneumatic, Electronic, Hydroboost and AC versions available;
- Pneumatic, electronic, Hydroboost and AC kits available (see page 102);
- Compatible with OLIpure system;
- Supplied with anti-condensation lining;
- Some versions compliant with: NF/KIWA/BELGAQUA certifications;
- EN 14055;
- 10 year warranty;
- Compatible with all floor mounted WC pans;
- 126mm thick.

Included

- 360mm flush pipe included;
- Wall fixing kit;
- Net for easier mortar adhesion;
- G 1/2" stop valve;
- WC connection pipe Ø45 .

OLI120 PLUS

Block

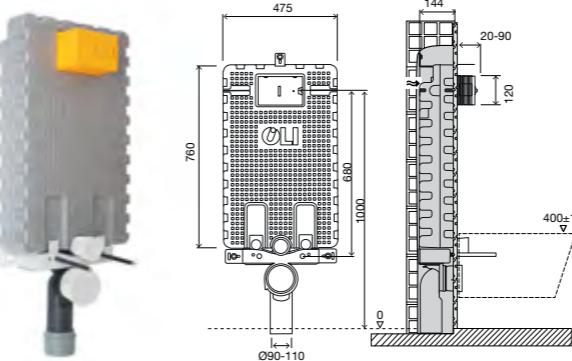


CODE	DESCRIPTION
151339	OLI120 PLUS Mechanic Block
880779	OLI120 Mechanic OLIpure Block
154076	OLI120 PLUS Pneumatic Block
154077	OLI120 PLUS Electronic Block
878845	OLI120 PLUS cap Hydroboost Block
878623	OLI120 PLUS cap AC Block

- Compatible with all wall-hung WC pans;
- 144mm thick;
- Solid wall installation;
- Robust EPS block that completely encloses the cistern and allows for faster installation;
- See general features for OLI120 PLUS.

OLI120 PLUS

Simflex

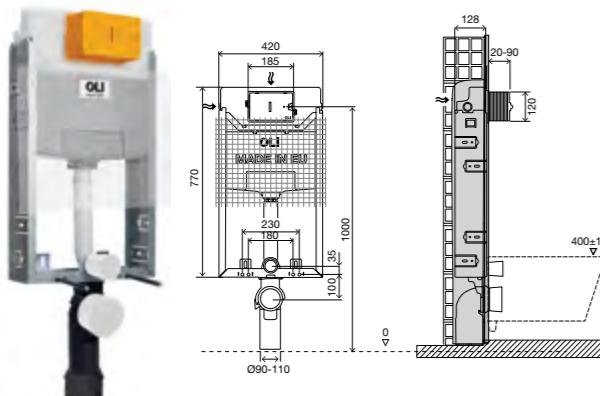

CODE	DESCRIPTION
099946	OLI120 PLUS Mechanic Simflex
880778	OLI120 Mechanic OLIpure Simflex
154078	OLI120 PLUS Pneumatic Simflex
154079	OLI120 PLUS Electronic Simflex
878844	OLI120 PLUS cap Hydroboost Simflex
878620	OLI120 PLUS cap AC Simflex


Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G 1/2" stop valve.

- Compatible with all wall-hung WC pans;
- 128mm thick;
- Solid wall installation;
- See general features for OLI120 PLUS.

OLI120 PLUS

Sanitarblock

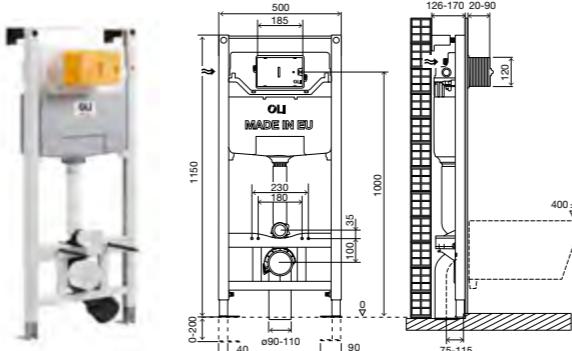

CODE	DESCRIPTION
099949	OLI120 PLUS Mechanic Sanitarblock
880780	OLI120 Mechanic OLIpure Sanitarblock
177306	OLI120 PLUS Pneumatic Sanitarblock
177305	OLI120 PLUS Electronic Sanitarblock
878846	OLI120 PLUS cap Hydroboost Sanitarblock
878621	OLI120 PLUS cap AC Sanitarblock


- Compatible with all wall-hung wc pans;
- Wall hung toilets up to 660mm long;
- Solid wall or drywall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- One man assembly;
- See general features for OLI120 Plus.

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G 1/2" stop valve.

OLI120 PLUS


Free-standing

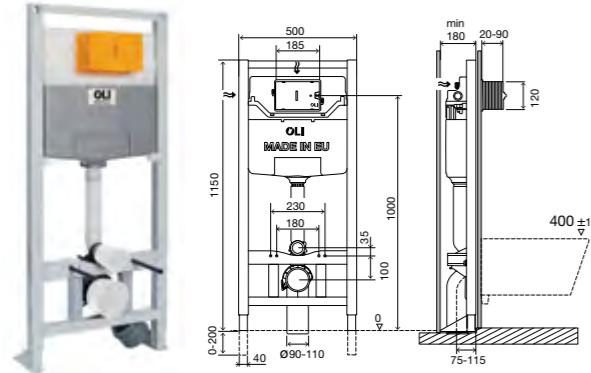

CODE	DESCRIPTION
099952	OLI120 PLUS Mechanic Free-standing
880781	OLI120 Mechanic OLIpure Free-standing
099951	OLI120 PLUS Pneumatic Free-standing
099943	OLI120 PLUS Electronic Free-standing
878847	OLI120 PLUS cap Hydroboost Free-standing
878622	OLI120 PLUS cap AC Free-standing

OLI120 PLUS

Height Adjustable Sanitarblock

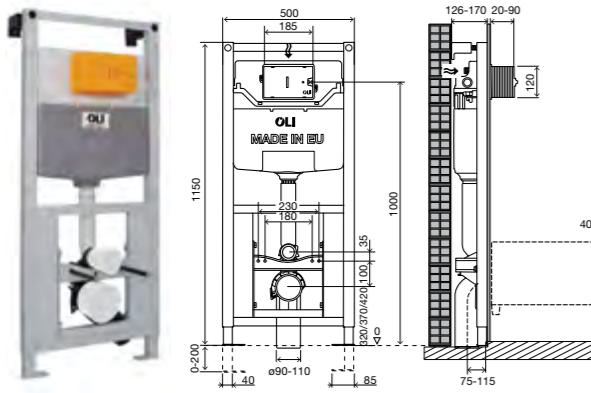

CODE	DESCRIPTION
154083	OLI120 PLUS Mechanic height adjustable Sanitarblock


- Compatible with all wall-hung WC pans up to 660mm length;
- Drywall installation;
- Depth adjustable outlet bend;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- See general features for OLI120 PLUS.

Included

- WC pan fixing material;
- Frame fixing material (floor);
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.

OLI120 PLUS SHT

Sanitarblock

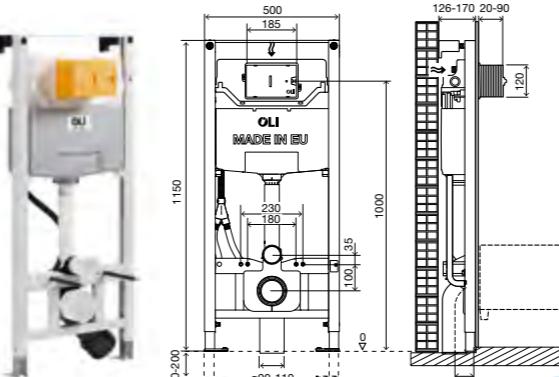

CODE	DESCRIPTION
135980	OLI120 PLUS Mechanic Sanitarblock SHT


- Prepared for shower toilet installation, kits sold separately;
- Compatible with all wall-hung wc pans;
- Wall hung toilets up to 660mm long;
- Solid wall or drywall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- One man assembly;
- See general features for OLI120 PLUS.

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.

OLI120 PLUS SHT

Free-standing

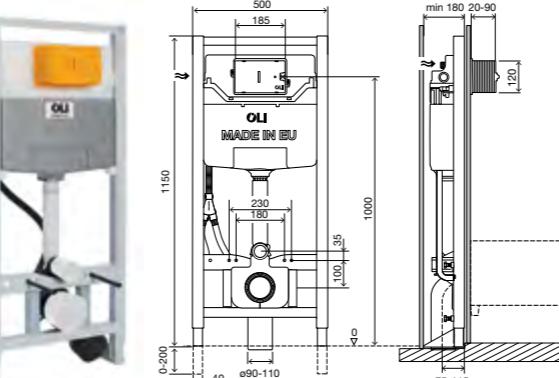


CODE	DESCRIPTION
880366	OLI120 PLUS Mechanic Free-standing SHT

- Prepared for shower toilet installation, kits sold separately;
- Compatible with all wall-hung WC pans;
- Drywall installation;
- Depth adjustable outlet bend;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- See general features for OLI120 PLUS.

Included

- WC pan fixing material;
- Frame fixing material (floor);
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.

SHOWER TOILET CONNECTION KIT

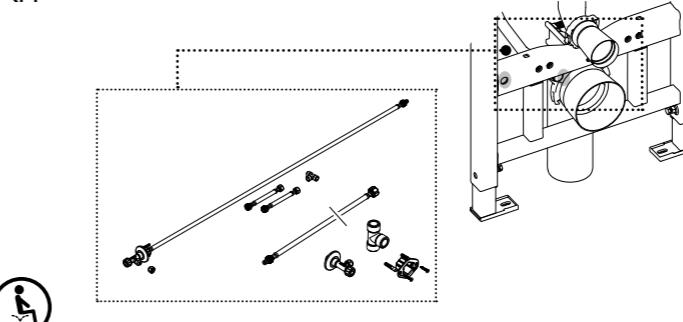

CODE	DESCRIPTION
191887	Shower toilet connection kit

NOTE: See compatible control plates on page 116.


58 NOTE: See compatible control plates on page 116.

measurements are in mm 59

FRAME WITH



POSSIBLE KITS

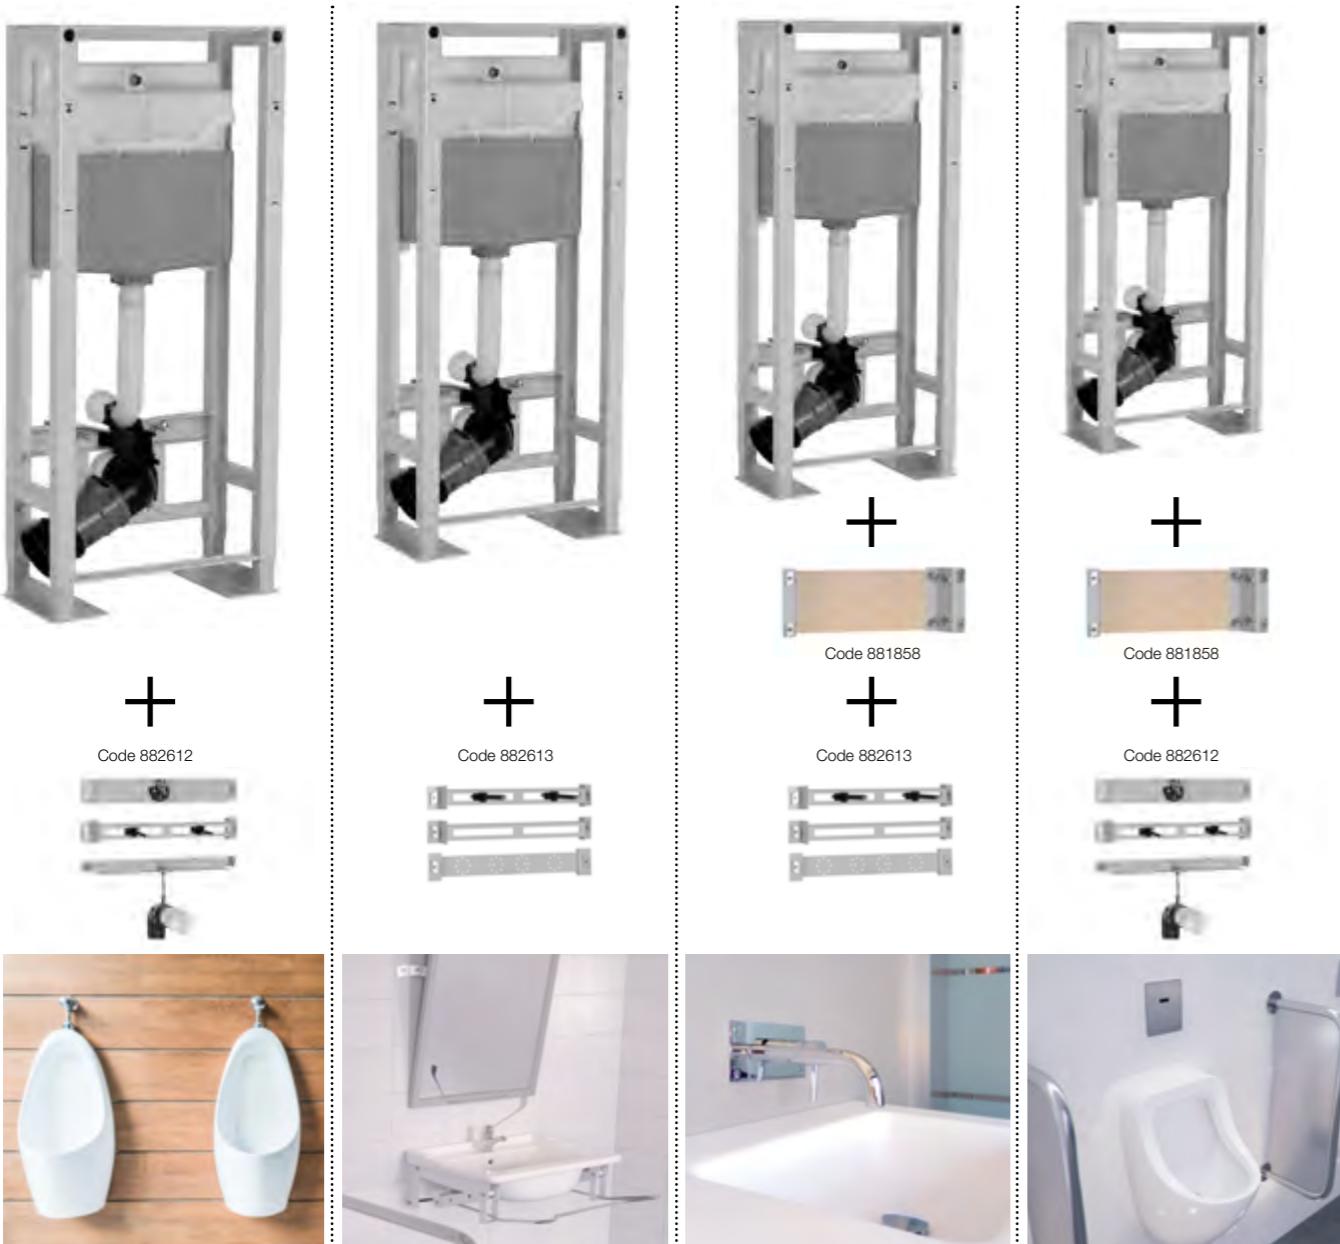

DOUBLE FRAME

WC | URINAL/WASHBASIN




- Free-standing double frame;
- Suitable for commercial applications
- Frame with cistern and urinal or washbasin installed back-to-back;
- Toilet and urinal or washbasin share the same waste pipe;
- Compatible with all wall-hung wc pans;
- Wall hung toilets up to 660mm long;
- Compatible with all wall-hung Urinals or Washbasins;
- Depth adjustable outlet bend;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- OLI120 Plus cistern mechanical actuation (see characteristics on page 56).

Included

- WC pan fixing material;
- Frame fixing material (floor);
- Inlet and outlet valve WC pan connection;
- Outlet bend and 90/110 adaptor;
- G 1/2" stop valve.

CODE DESCRIPTION

882618 DOUBLE FRAME- WC | URINAL/WASHBASIN

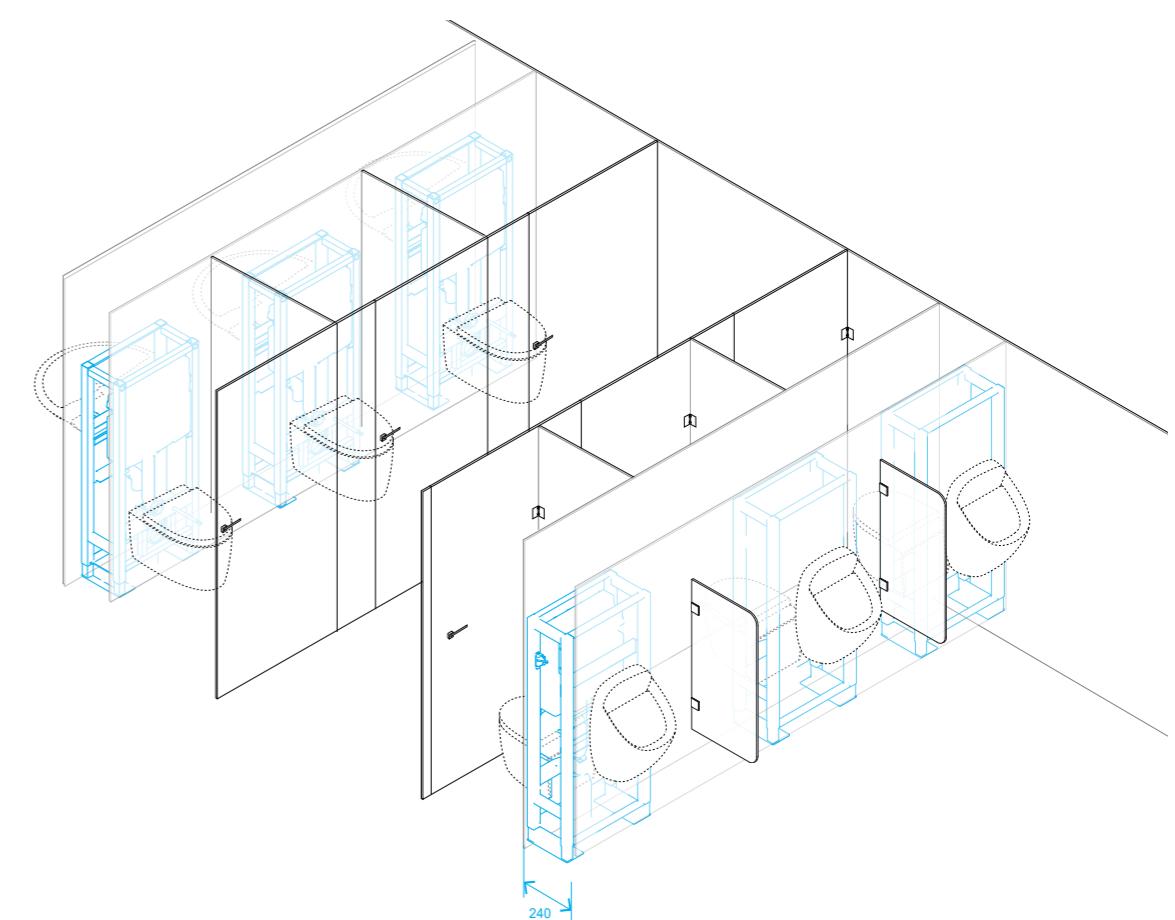

See page 90 Urinal Kit

See page 91 Washbasin Kit

See page 92 Concealed tap or fluxometer

+ See page 90 Urinal Kit

See page 92 Concealed tap or fluxometer

+ See page 91 Washbasin Kit

NOTE: See compatible control plates on page 116.

measurements are in mm




OLI has the solution
for wall-hung and
floor-standing toilets.

OLI120


126mm Thick

(126)

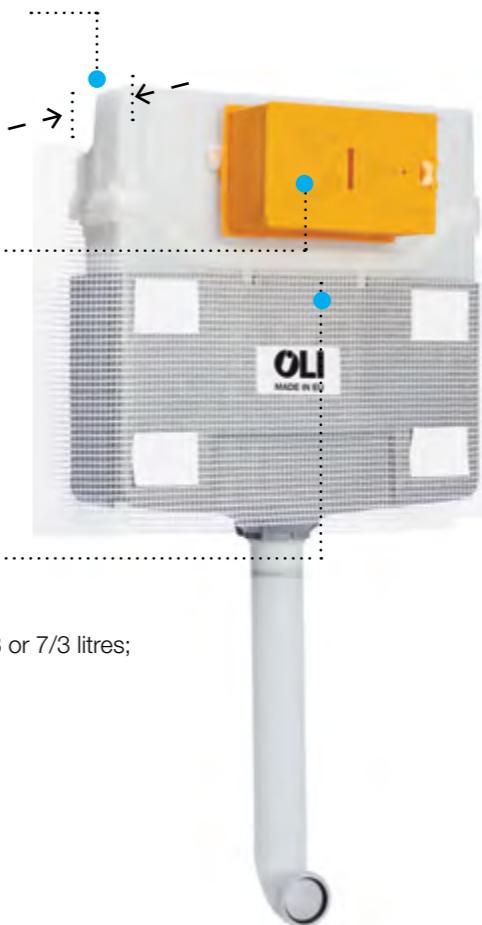

Outlet Valve

- Dual Flush, pre-set for 6/3 litres;
- Adjustable flush volumes: 4/2, 6/3 or 7/3 litres;
- Outlet valve with silicone seal.




Control plates compatibility

MECHANIC



OLI120

Direct

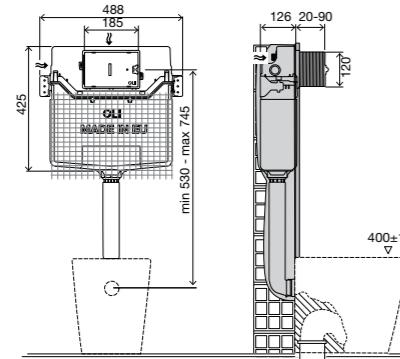**General features**


- Dual flush 6/3 litre in-wall cistern (adjustable to 4/2 - 7/3 litres);
- Polypropylene (PP) cistern highly resistant and unalterable to thermal stress;
- Mechanical inlet valve;
- Silente inlet valve class 1 NF certified;
- Mechanical actuation;
- Supplied with anti-condensation lining;
- EN 14055 CE marking;
- 10 year warranty;
- Compatible with all floor mounted WC pans;
- 126mm thick.



CODE	DESCRIPTION
097945	OLI120 Mechanic

OLI120

Sanitarblock

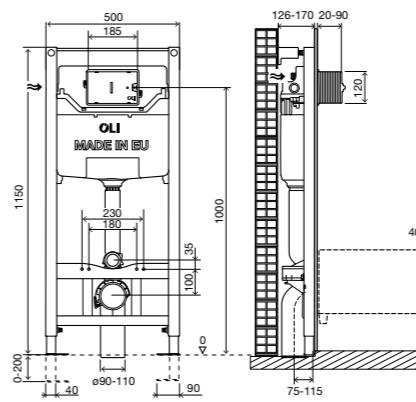

- Compatible with all wall-hung wc pans;
- Wall hung toilets up to 660mm long;
- Solid wall or drywall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- One man assembly;
- See general features for OLI120.

Included


- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.



CODE	DESCRIPTION
097947	OLI120 Mechanic Sanitarblock

OLI120

Simflex




- Compatible with all wall-hung WC pans;
- 128mm thick;
- Solid wall installation;
- See general features for OLI120.




CODE	DESCRIPTION
097946	OLI120 Mechanic Simflex



OLI74 PLUS

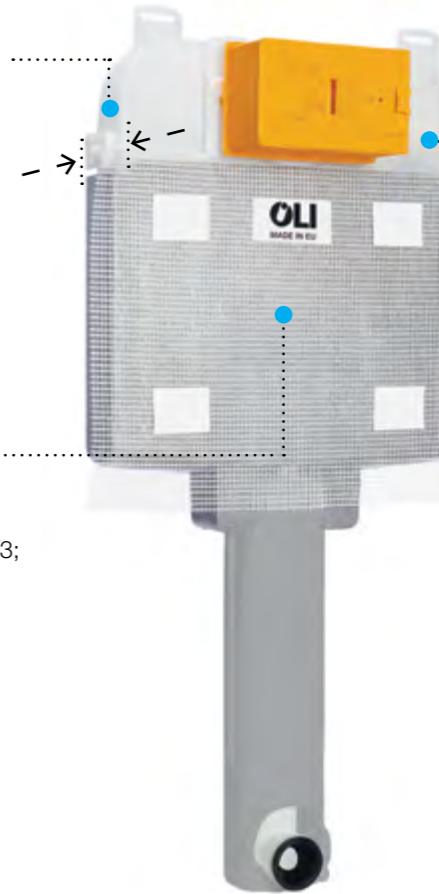SAVES UP TO 9L
OF WATER PER DAY**80mm Thick****PLUS inlet valve**

- Water-saving inlet valve;
- Equipped with a revolutionary delayed refill system: starts filling the cistern only when the flush valve is closed;
- Silent – Class 1 certified.

**Outlet Valve**

- Dual Flush, pre-set for 6/3 litres;
- Adjustable flush volumes: 4/2 or 6/3;
- Silicone seal.

**OLIpure®**

- Universal:** Compatible with existing WC liquid* disinfectants on the market.
- Long lasting:** Storage capacity of 450ml.

Compatibility

Wide range of control plates

NO-TOUCH	MECHANIC	PNEUMATIC	ELECTRONIC
	Glam Plain Metal iPlate	Blink Trend Electra I	
	Narrow River Ria Ria Stop	Trumpet SM15 Electra II	
	Globe Slim Oceania Ino-x	Oceania Easy Dual Electra III	
		Salina Karisma	

OLI74 PLUS



OLI74 PLUS 2 INLET VALVES

(see product range on [page 70](#))

NEW


OLI74 Plus 2 inlet valves allows you to connect your cistern to a second water source, such as rainwater for example. It provides a more efficient use of water while reducing your water bill.

SAVE **100%**

Connected only to rainwater

SAVE **50%**

Connected to the network + rainwater




OLI74 PLUS 4/2l

Save water with every flush.

When compared to OLI74 PLUS 6/3l you save 2 litres with every full flush and 1 litre with every half flush.

(see product range on [page 70](#))




OLI74 PLUS 4/2l with 2 INLET VALVES

Combines both of the water efficient solutions above to help you maximize your water saving.

(see product range on [page 70](#))

OLI74 PLUS

Direct

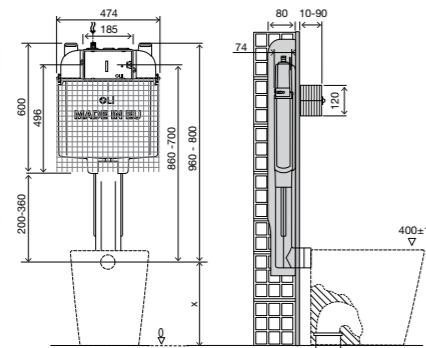

CODE	DESCRIPTION
601601	OLI74 PLUS Mechanic
601603	OLI74 PLUS Mechanic 4/2I NEW
877961	OLI74 PLUS Mechanic 2 inlet valves NEW
880789	OLI74 PLUS Mechanic 4/2I 2 inlet valves NEW
880782	OLI74 Mechanic OLIpure
601602	OLI74 PLUS Pneumatic
077715	OLI74 PLUS Electronic
878838	OLI74 PLUS cap Hydroboost
878624	OLI74 PLUS cap AC

General features


- Dual flush 6/3 litre in-wall cistern (adjustable to 4.5/3 litres);
- 5/3 litres flush version upon request (Class A+);
- Polypropylene (PP) cistern highly resistant and inalterable to thermal stress;
- Delayed refilling – PLUS technology inlet valve;
- Silent inlet valve;
- Mechanical, Pneumatic, Electronic, Hydroboost and AC version available;
- Pneumatic, electronic, Hydroboost and AC kits available (see page 103);
- Supplied with anti-condensation lining;
- Some versions compliant with: SAI-WATERMARK/UPC/KIWA;
- EN 14055;
- "A" class for the Water Efficiency in compliance with the ANQIP Authority requirements;
- 10 year warranty.
- Compatible with all floor mounted WC pans;
- 80mm total thickness.

Included

- 360mm flush pipe included;
- Wall fixing kit;
- Net for easier mortar adhesion;
- G ½" stop valve;
- WC connection pipe Ø45 .

OLI74 PLUS

Simflex

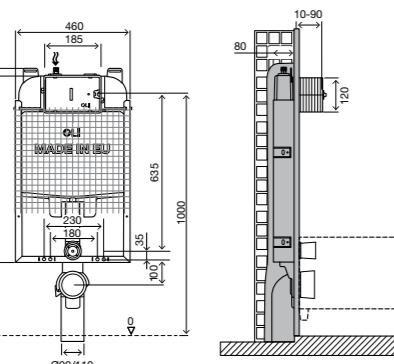


CODE	DESCRIPTION
601901	OLI74 PLUS Mechanic Simflex
216251	OLI74 PLUS Mechanic 4/2I Simflex NEW
878929	OLI74 PLUS Mechanic Simflex 2 inlet valves NEW
880790	OLI74 PLUS Mechanic 4/2I Simflex 2 inlet valves NEW
880783	OLI74 Mechanic OLIpure Simflex
002332	OLI74 PLUS Pneumatic Simflex
077736	OLI74 PLUS Electronic Simflex
878839	OLI74 PLUS cap Hydroboost Simflex
878625	OLI74 PLUS cap AC Simflex

Included

- Net for easier mortar adhesion;
- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.

OLI74 PLUS

S90 Sanitarblock

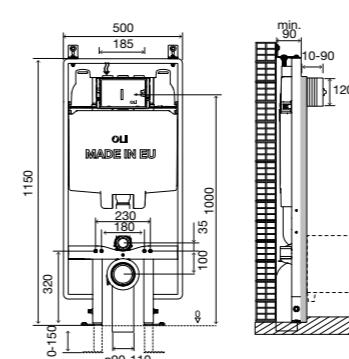

CODE	DESCRIPTION
601803	OLI74 PLUS Mechanic S90 Sanitarblock
216248	OLI74 PLUS Mechanic 4/2I S90 Sanitarblock NEW
880799	OLI74 PLUS Mechanic S90 Sanitarblock 2 inlet valves NEW
880792	OLI74 PLUS Mechanic 4/2I S90 Sanitarblock 2 inlet valves NEW
880784	OLI74 Mechanic OLIpure S90 Sanitarblock
187649	OLI74 PLUS Pneumatic S90 Sanitarblock
187650	OLI74 PLUS Electronic S90 Sanitarblock
878840	OLI74 PLUS cap Hydroboost S90 Sanitarblock
878655	OLI74 PLUS cap AC S90 Sanitarblock



- Compatible with all wall-hung WC pans;
- Solid wall or drywall installation;
- Easy and quick installation;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 150mm;
- 90mm minimum thick;
- See general features for OLI74 PLUS.

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.

OLI74 PLUS

Sanitarblock



CODE	DESCRIPTION
601821	OLI74 PLUS Mechanic Sanitarblock
216249	OLI74 PLUS Mechanic 4/2I Sanitarblock NEW
879085	OLI74 PLUS Mechanic Sanitarblock 2 inlet valves NEW
880791	OLI74 PLUS Mechanic 4/2I Sanitarblock 2 inlet valves NEW
880785	OLI74 Mechanic OLIpure Sanitarblock
002333	OLI74 PLUS Pneumatic Sanitarblock
077746	OLI74 PLUS Electronic Sanitarblock
878841	OLI74 PLUS cap Hydroboost Sanitarblock
878626	OLI74 PLUS cap AC Sanitarblock


- Compatible with all wall-hung WC pans;
- Solid wall or drywall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- 120mm minimum thick;
- See general features for OLI74 PLUS.

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.

OLI74 PLUS


Free-standing

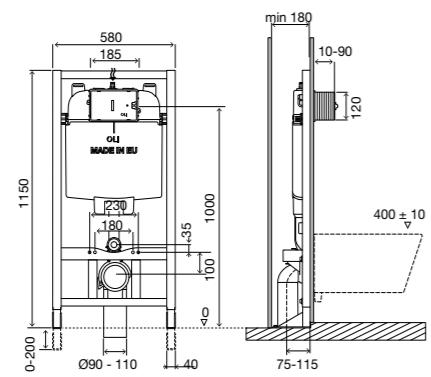

CODE	DESCRIPTION
601824	OLI74 PLUS Mechanic Free-standing
216247	OLI74 PLUS Mechanic 4/2l Free-standing <small>(NEW)</small>
879089	OLI74 PLUS Mechanic Free-standing 2 inlet valves <small>(NEW)</small>
880793	OLI74 PLUS Mechanic 4/2l Free-standing 2 inlet valves <small>(NEW)</small>
880786	OLI74 Mechanic OLIpure Free-standing
002488	OLI74 PLUS Pneumatic Free-standing
077752	OLI74 PLUS Electronic Free-standing
878842	OLI74 PLUS cap Hydroboost Free-standing
878627	OLI74 PLUS cap AC Free-standing

OLI74 PLUS

Free-standing Double

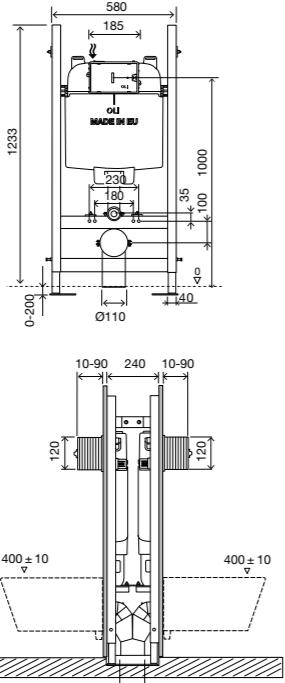

CODE	DESCRIPTION
600859	OLI74 PLUS Mechanic Free-standing double

- Compatible with all wall-hung WC pans up to 660mm length;
- Drywall installation;
- Depth adjustable outlet bend;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- 180mm minimum thick;
- See general features for OLI74 PLUS.

Included

- WC pan fixing material;
- Frame fixing material (floor);
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.





OLI80



80mm Thick



Outlet Valve

- Dual Flush, pre-set for 6/3 litres;
- Adjustable flush volumes: 4.5/3 litres.




Control plates compatibility

MECHANIC



OLI80

Direct

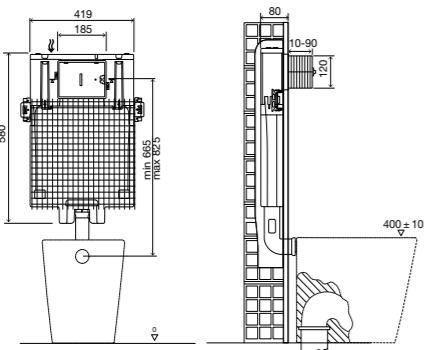**General features**

- Dual flush 6/3 litre in-wall cistern (adjustable to 4.5/3 litres);
- Polypropylene (PP) cistern highly resistant and inalterable to thermal stress;
- Silent inlet valve class 2;
- Mechanical actuation;
- Supplied with anti-condensation lining;
- Some versions compliant with: DIN/BELGAQUA certification;
- EN 14055 CE marking;
- 10 year warranty.
- Compatible with all floor mounted WC pans;
- 80mm total thickness.

Included

- 360mm flush pipe included;
- Wall fixing kit;
- Net for easier mortar adhesion;
- G ½" stop valve;
- WC connection pipe Ø45 .




CODE

DESCRIPTION

600051 OLI80 Mechanic

OLI80

Simflex

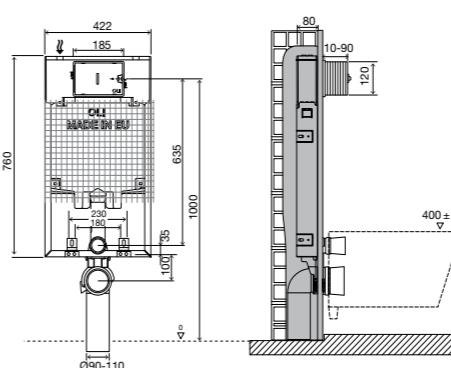

- Compatible with all wall-hung WC pans;
- 80mm thick;
- Solid wall installation;
- See general features for OLI80.

Included

- Net for easier mortar adhesion;
- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½ " stop valve.




CODE

DESCRIPTION

600251 OLI80 Mechanic Simflex

OLI80


Squat pan

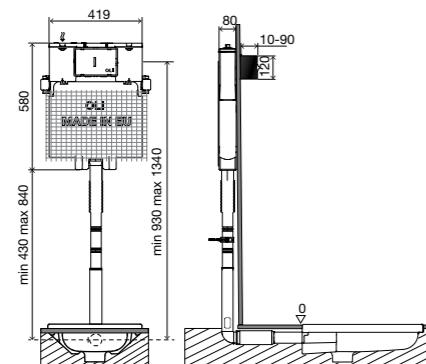

- Compatible with all WC pan at floor level or floor mounted;
- 80mm thick;
- Solid wall installation;
- See general features for OLI80.

Included

- Wall fixing kit;
- Articulated pipe 50;
- Articulated pipe clamp;
- WC connection pipe 45;
- Net for easier mortar adhesion;
- G ½ stop valve.




CODE

DESCRIPTION

045058 OLI80 Mechanic squat pan

OLI80

Sanitarblock

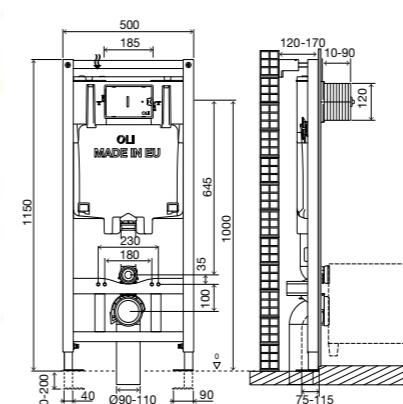

- Compatible with all wall-hung wc pans;
- Wall hung toilets up to 660mm long;
- Solid wall or drywall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- One man assembly;
- 120mm minimum thick;
- See general features for OLI80.

Included

- WC pan fixing material;
- Frame fixing material (floor);
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor
- G ½ " stop valve.



CODE

DESCRIPTION

600151 OLI80 Mechanic Sanitarblock

Expert Plus allows top or front actuation


Expert Plus is the ideal solution for lower installation.



EXPERT PLUS



150mm Thick

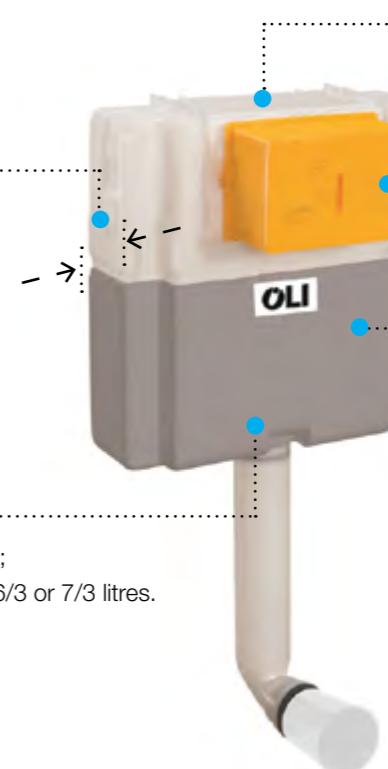

Outlet Valve

- Dual Flush, pre-set for 6/3 litres;
- Adjustable flush volumes: 4/2, 6/3 or 7/3 litres.




OLIpure®

- Universal:** Compatible with existing WC liquid* disinfectants on the market.
- Long lasting:** Storage capacity of 450ml.



SAVES UP TO 9L
OF WATER PER DAY

PLUS inlet valve




- Water-saving inlet valve;
- Equipped with a revolutionary delayed refill system: starts filling the cistern only when the flush valve is closed;
- Silent – Class 1 certified.

Compatibility

Wide range of control plates


MECHANIC

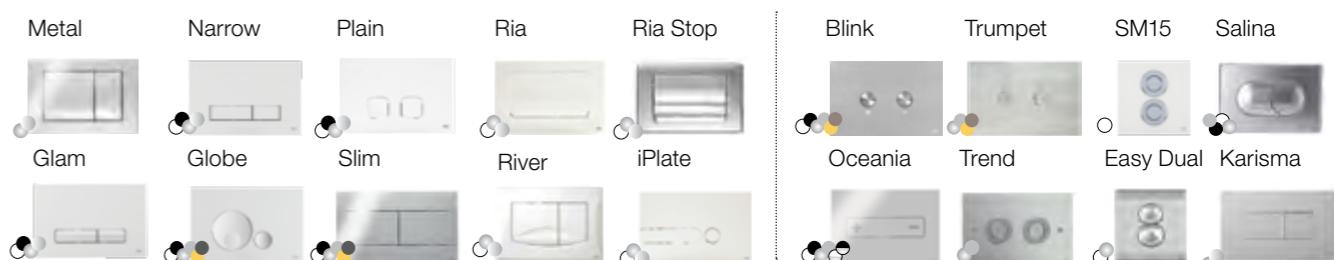

*The use of chlorine-free liquid detergents with a viscosity between 150 and 300 cp (at 20 °C) is recommended.

EXPERT PLUS

Direct




General features


- Dual flush 6/3 litre in-wall cistern (adjustable to 4/2 or 7/3 litres);
 - Pre-set version 4/2 (CL1) or 4/2.6 (CL2) litres available on request;
 - Polypropylene (PP) cistern highly resistant and inalterable to thermal stress;
 - Delayed refilling – PLUS technology inlet valve;
 - Silent inlet valve class 1 certified;
 - Top or front actuation/access;
 - Mechanic or pneumatic actuation (see kit page 106);
 - For top actuation for the control plates Glam, Narrow, Globe and Pain (see page 104);
 - Lower/under bench installation possible;
 - Some versions compliant with:
SAI-WATERMARK/SINTEF/NF/BELGAQUA certification;
EN 14055 CE marking;
 - Class "A" Water Efficiency in compliance with the ANQIP Authority requirements;
 - Supplied with anti-condensation lining;
 - 10 year warranty.
- Compatible with all floor mounted WC pans;
- 150mm thick.

Included

- 315 mm flush pipe;
- G 1/2" stop valve;
- WC connection pipe Ø45.



Top actuation

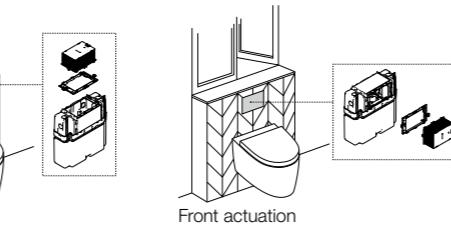


Front actuation



CODE	DESCRIPTION
721003	EXPERT PLUS Mechanic
152966	EXPERT Mechanic OLIpure
721005	EXPERT PLUS Pneumatic

EXPERT PLUS


Simflex 820

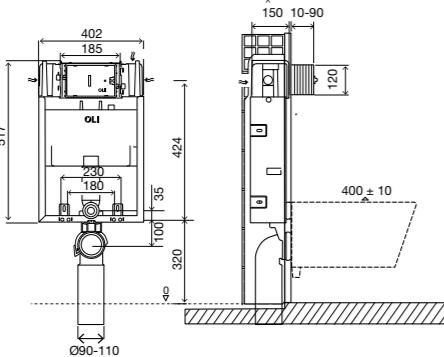


- Compatible with all wall-hung WC pans;
- Solid wall installation;
- Lower/under bench installation possible;
- 150mm minimum thick;
- See general features for EXPERT PLUS.

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G 1/2" stop valve.



Top actuation

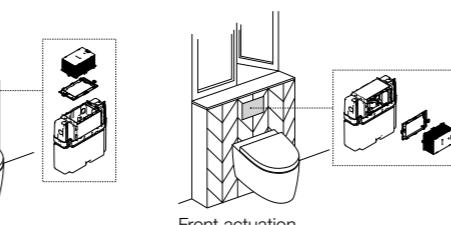


Front actuation



CODE	DESCRIPTION
076456	EXPERT PLUS Mechanic Simflex 820
152967	EXPERT Mechanic OLIpure Simflex 820
141960	EXPERT PLUS Pneumatic Simflex 820

EXPERT PLUS

Sanitarblock 820

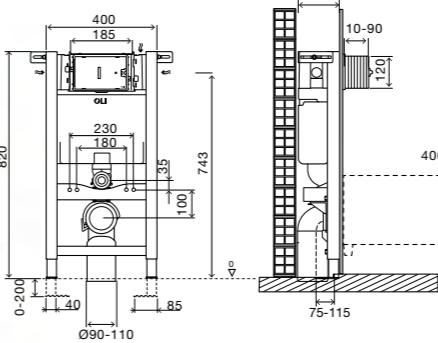


CODE	DESCRIPTION
721703	EXPERT PLUS Mechanic Sanitarblock 820
880787	EXPERT Mechanic OLIpure Sanitarblock 820

721705 EXPERT PLUS Pneumatic Sanitarblock 820


- Compatible with all wall-hung WC pans;
- Solid wall or drywall installation;
- Frame tested for a 400kg load;
- Easy and quick installation;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- Lower/under bench installation possible;
- 150mm minimum thick;
- See general features for EXPERT PLUS.

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G 1/2" stop valve.




Top actuation



Front actuation

EXPERT PLUS

Free-standing 820

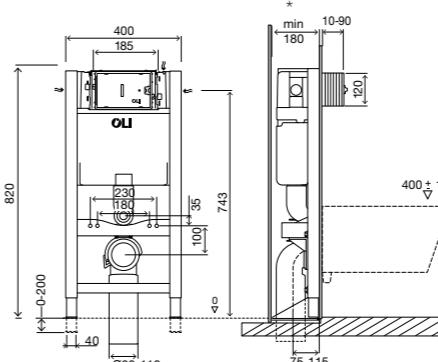


CODE	DESCRIPTION
014092	EXPERT PLUS Mechanic Free-standing 820
880788	EXPERT Mechanic OLIpure Free-standing 820

048375 EXPERT PLUS Pneumatic Free-standing 820


- Compatible with all wall-hung WC pans;
- Drywall installation;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- Lower/under bench installation possible;
- 180mm minimum thick;
- See general features for EXPERT PLUS.

Included



- WC pan fixing material;
- Frame fixing material (floor);
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G 1/2" stop valve.




Top actuation



Front actuation




EXPERT PLUS 1130

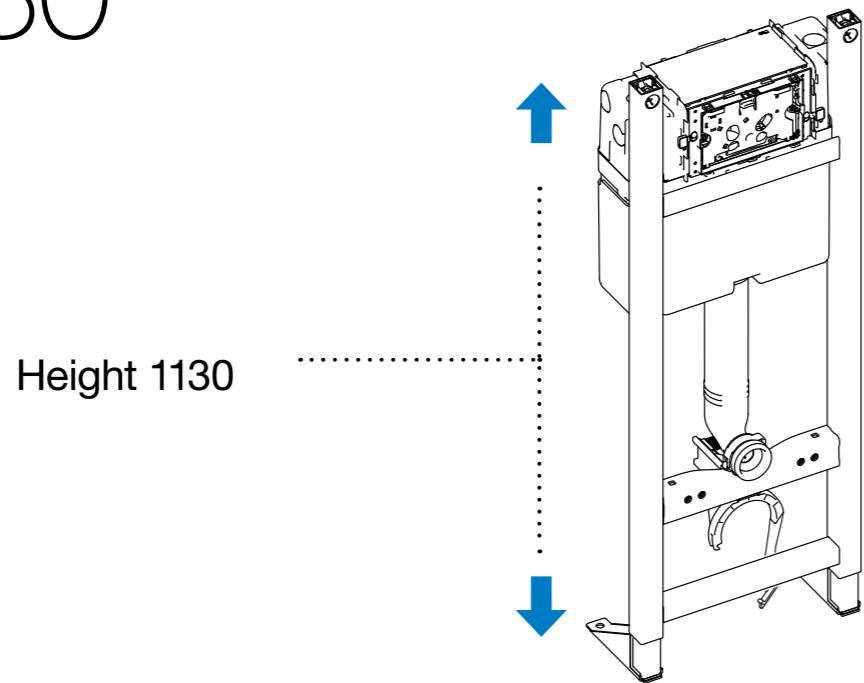

EXPERT PLUS

Simflex 1130

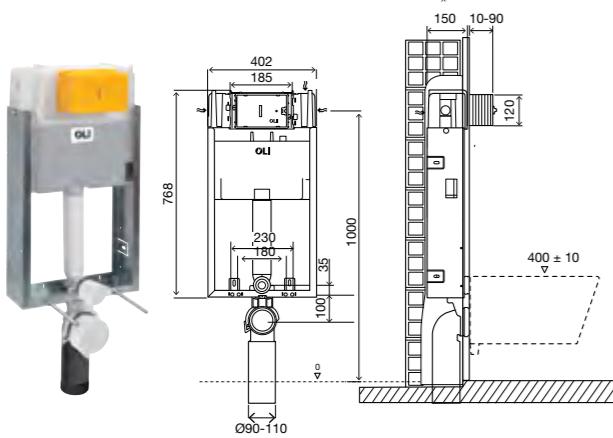


- Compatible with all wall-hung WC pans;
- Solid wall installation;
- 150mm minimum thick;
- See general features for EXPERT PLUS.

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.




CODE 014095 **DESCRIPTION** EXPERT PLUS Mechanic Simflex 1130

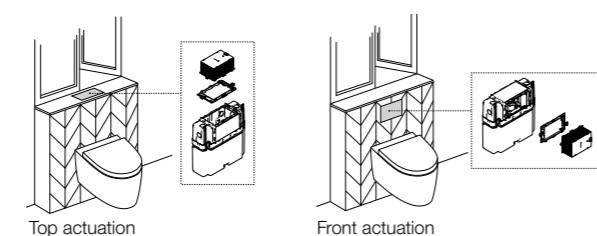

EXPERT PLUS

Sanitarblock 1130

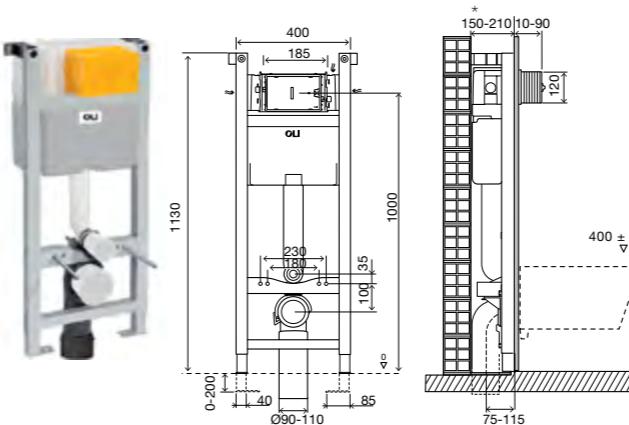


- Compatible with all wall-hung WC pans;
- Solid wall or drywall installation;
- Frame tested for a 400kg load;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- Optional corner kit (see page 107);
- Lower/under bench installation possible;
- 150mm minimum thick;
- See general features for EXPERT PLUS.

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.




CODE 721803 **DESCRIPTION** EXPERT PLUS Mechanic Sanitarblock 1130

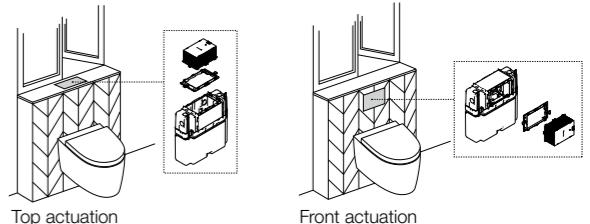

EXPERT PLUS

Free-standing 1130

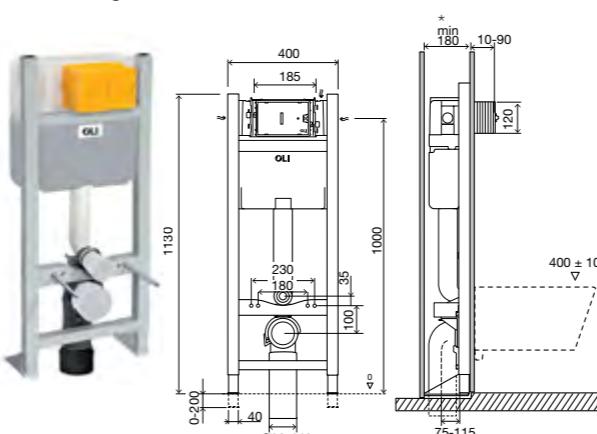




- Compatible with all wall-hung WC pans;
- Drywall installation;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- Lower/under bench installation possible;
- 180mm minimum thick;
- See general features for EXPERT PLUS.

Included

- WC pan fixing material;
- Frame fixing material (floor);
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.



CODE 014091 **DESCRIPTION** EXPERT PLUS Mechanic Free-standing 1130

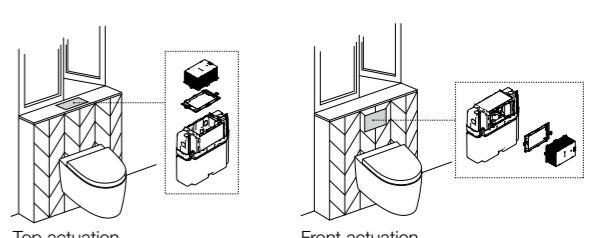


QUADRA PLUS



878489
BLINK
Black

Quadra Plus fits
practically anywhere.

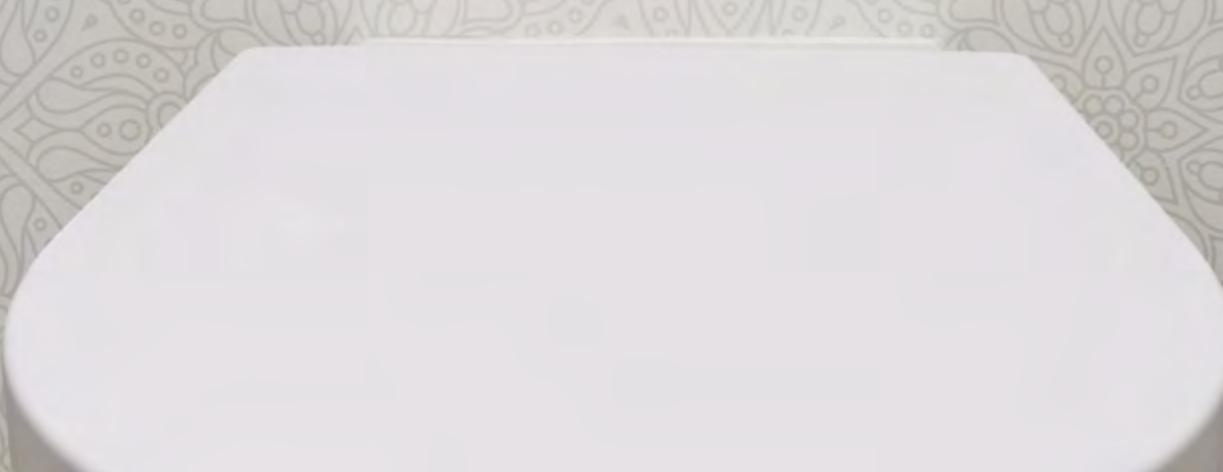

187mm Thick



Outlet Valve

- Dual Flush, pre-set for 6/3 litres.




PLUS
inlet valve




SAVES UP TO 9L
OF WATER PER DAY

- Water-saving inlet valve;
- Equipped with a revolutionary delayed refill system: starts filling the cistern only when the flush valve is closed;
- Silent – Class 1 certified.



Ideal for corner application
(requires corner kit, Code 719183)

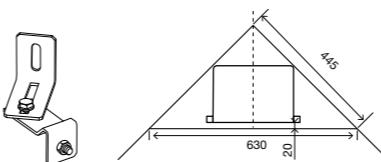


Compatibility

Wide range of control plates

MECHANIC




PNEUMATIC

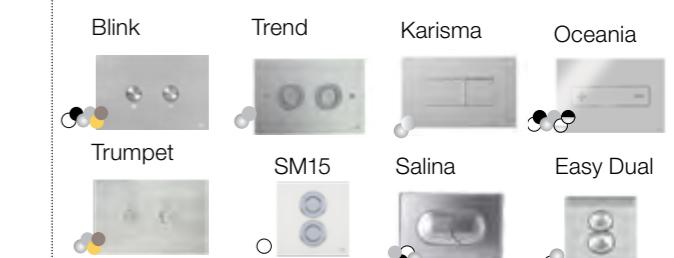

QUADRA PLUS

Direct

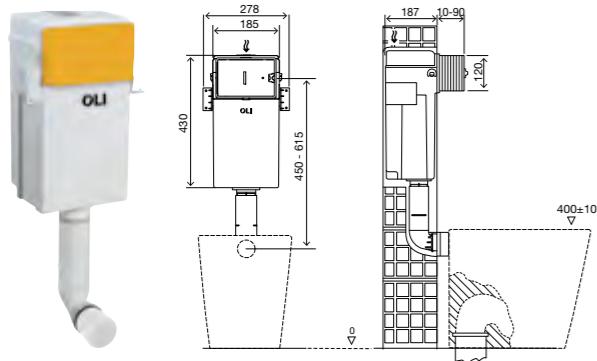

CODE	DESCRIPTION
720002	QUADRA PLUS Mechanic
037172	QUADRA PLUS Pneumatic

General features

- Dual flush 6/3 litre in-wall cistern;
- Delayed refilling - AZOR PLUS inlet valve;
- Compatible with Pneumatic buttons - available kit (see page 130);
- 270 mm reduced width;
- EN 14055 CE marking;
- Some versions compliant with: NF certification;
- Supplied with internal anti-condensation lining;
- 10 year warranty.


- Compatible with all floor mounted WC pans;
- 187 mm thick.

Included

- 315mm flush pipe;
- G ½" stop valve;
- WC connection pipe Ø45 .

QUADRA PLUS

Free-standing

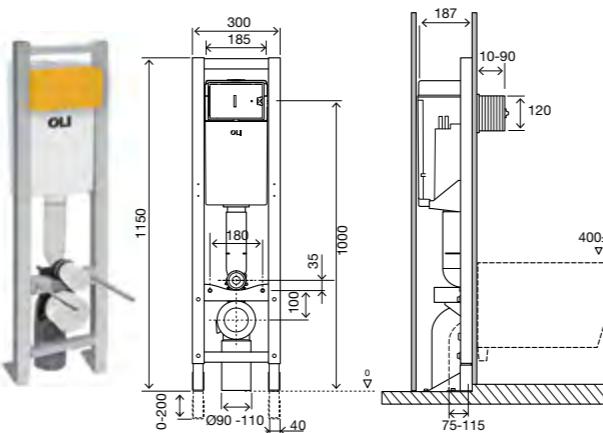

CODE	DESCRIPTION
722021	QUADRA PLUS Mechanic Free-standing
187103	QUADRA PLUS Pneumatic Free-standing


- Compatible with wall-hung WC pans with a 180mm fixation length;
- Drywall installation;
- Frame tested for a 400kg load;
- Easy and quick installation;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 200mm;
- 300mm reduced width;
- 187mm minimum thick;
- See general features for QUADRA PLUS.

Included

- WC pan fixing material;
- Frame fixing material (floor);
- Inlet and outlet pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.

QUADRA PLUS

Sanitarblock

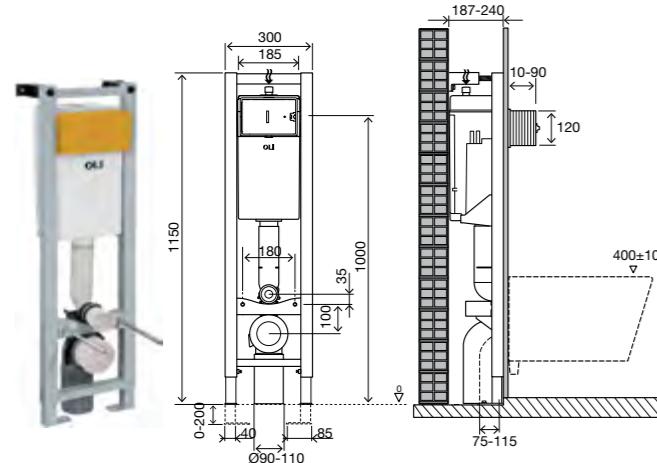


CODE	DESCRIPTION
135974	QUADRA PLUS Mechanic Sanitarblock
141945	QUADRA PLUS Pneumatic Sanitarblock

- Compatible with wall-hung WC pans with a 180mm fixation length;
- Solid wall or drywall installation;
- Frame tested for a 400kg load;
- Easy and quick installation with Fast-Fit system;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 200mm;
- 300mm reduced width;
- Optional corner kit (see page 107);
- 190mm minimum thick;
- See general features for QUADRA PLUS.

Included

- WC pan fixing material;
- Frame fixing material;
- Inlet and outlet pan connection;
- Outlet bend and Ø90/110 adaptor;
- G ½" stop valve.

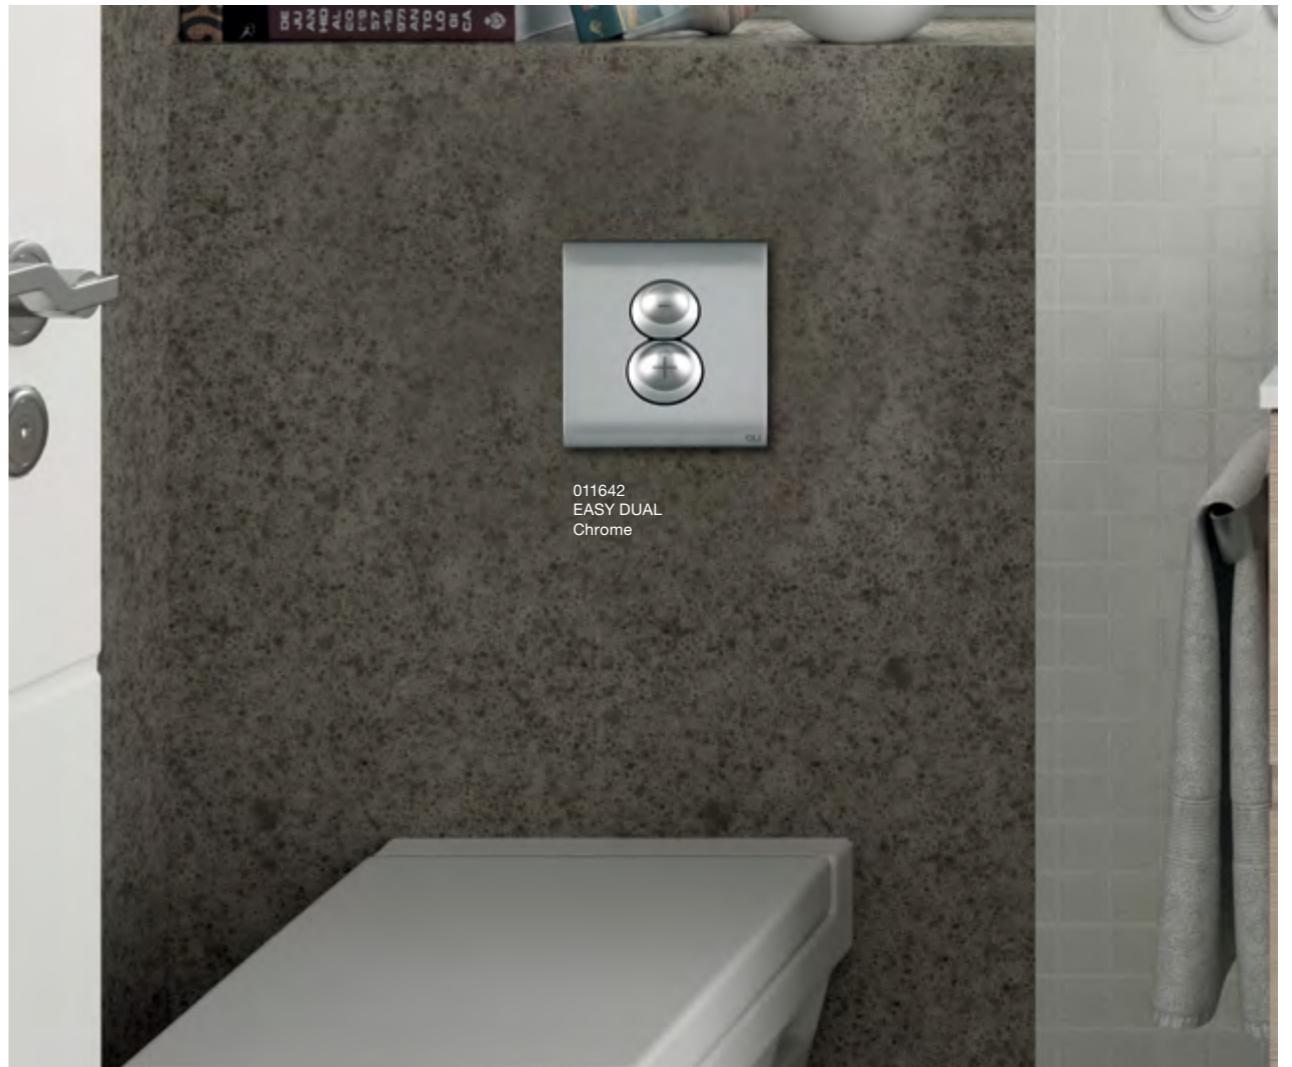

FRAMES



OLI



KIT- WC/URINAL/WASHSBASIN

[Page 90](#)



NEW



SHOWER

For shower and taps.

[Page 93](#)



WC

For wall-hung WC.

[Page 94](#)



BIDET

For wall-hung bidet.

[Page 96](#)



WASHBASIN

For wall-hung washbasin.

[Page 98](#)




URINAL

For wall-hung urinal.

[Page 99](#)



WASHBASIN KIT

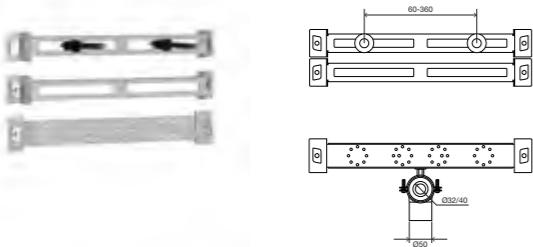


- Washbasin kit compatible with wall-hung washbasins;
- Toilet and washbasin share the same waste pipe;
- Easy and quick installation.

Included

- Washbasin fixing material;
- Outlet bend ø40mm – 32 / 50mm – 40mm.

URINAL KIT

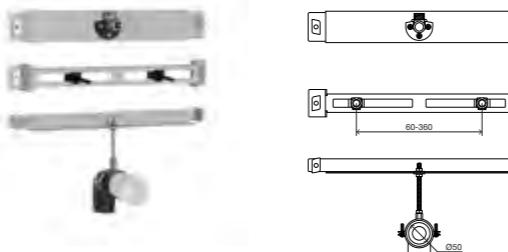


- Urinal kit compatible with all wall-hung Urinals;
- Toilet and urinal share the same waste pipe;
- Easy and quick installation.


Included

- Urinal fixing material;
- Outlet bend ø40mm – 32 / 50mm – 40mm;
- G ½" fitting for water connection.


CODE	DESCRIPTION
882613	Washbasin Kit
882618	DOUBLE FRAME - WC URINAL/WASHSBASIN

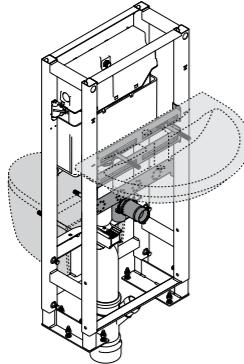

CODE	DESCRIPTION
882612	Urinal Kit
882618	DOUBLE FRAME - WC URINAL/WASHSBASIN

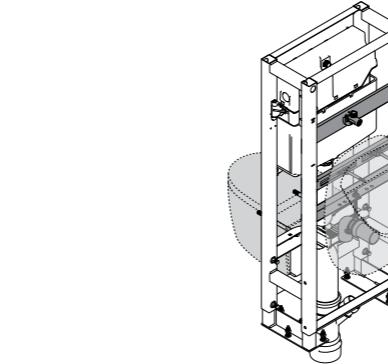

WALL TAP OR CONCEALED URINAL FLUSH VALVE KIT


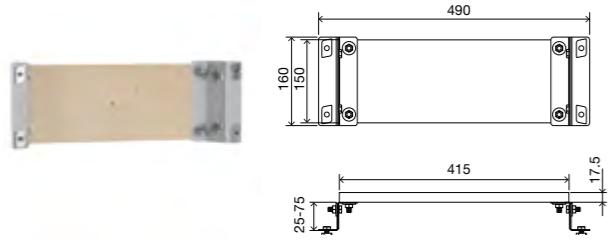


- Kit for wall tap or concealed urinal flush valve;
- Compatible with all taps and urinal concealed flush;
- Adjustable mounting wood plate.

Included



- Fixing material;
- Wood panel.

CODE	DESCRIPTION
881858	WALL TAP OR CONCEALED URINAL FLUSH VALVE
882618	DOUBLE FRAME - WC URINAL/WASHSBASIN

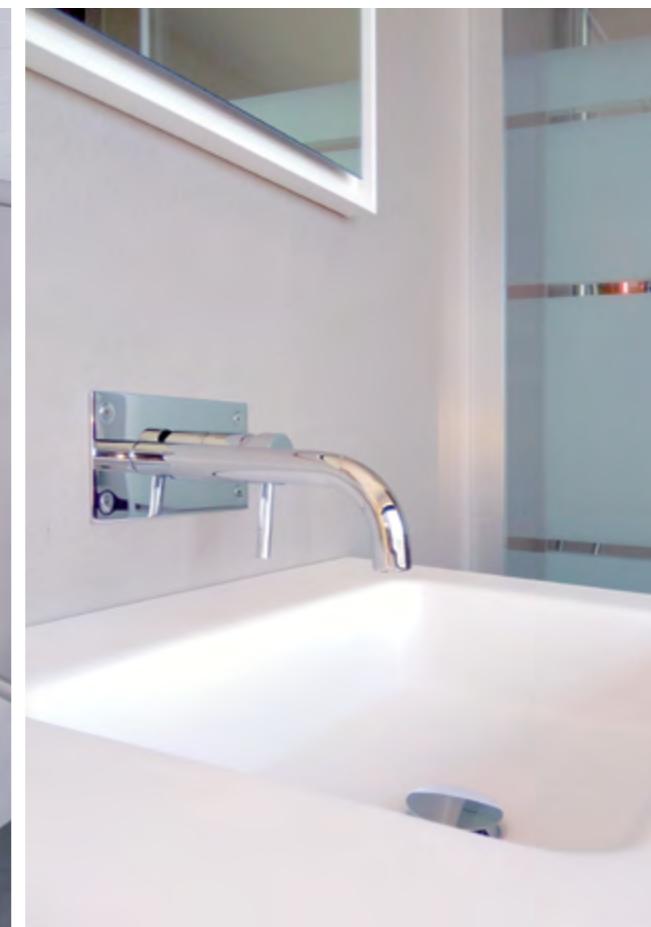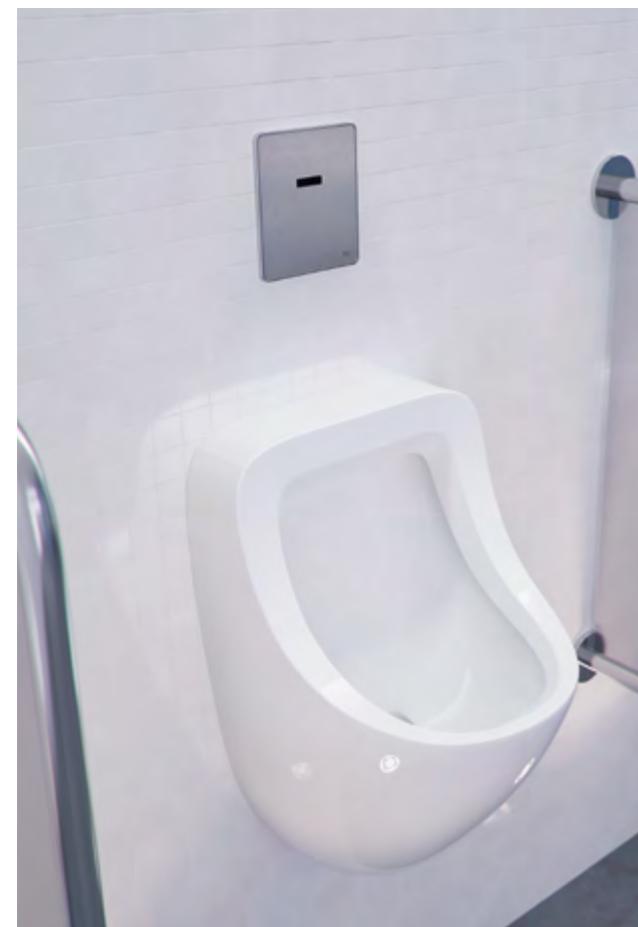

WC FRAME


for flush valve

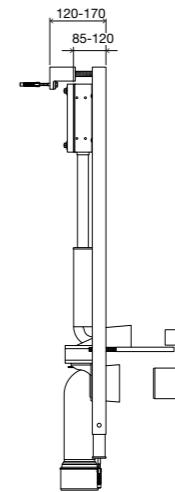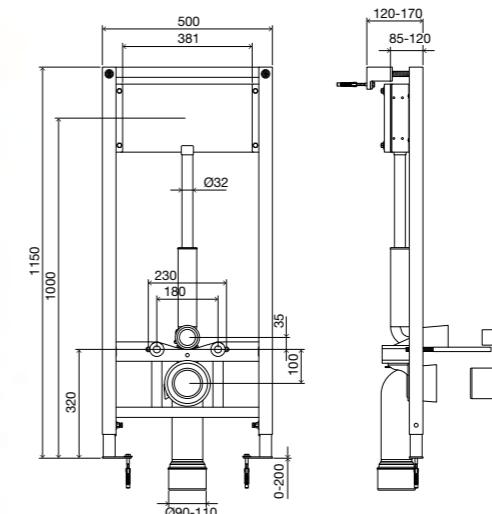

CODE	DESCRIPTION
880462	WC FRAME for flush valve

SHOWER FRAME

Sanitarblock

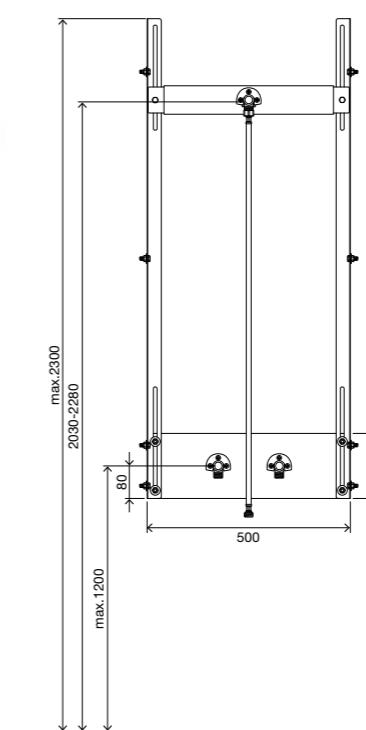

CODE	DESCRIPTION
880461	SHOWER Frame Sanitarblock


- frame for wall-hung WC with silent flushing;
- Solid wall or drywall installation;
- Painted tubular frame;
- Easy and quick installation with Fast-Fit system;
- Frame tested with 400kg load;
- Height adjustable from 0 to 200mm;
- Adjustable mounting plate;
- Flush valve not included;
- 10 year warranty.

Included

- WC fixing material;
- Frame fixing material;
- Inlet and outlet WC pan connection;
- Outlet bend and Ø90/110 adaptor.

WC

Sanitarblock

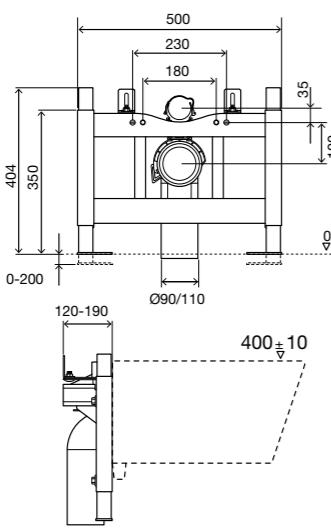

- Compatible with wall-hung WC pans;
- Solid wall or drywall installation;
- Painted tubular frame;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- 10 year warranty.

Included

- WC pan fixing material;
- Frame fixing material;
- Outlet bend and Ø90/110 adaptor.




CODE DESCRIPTION

714001 WC Sanitarblock

WC

Free-standing

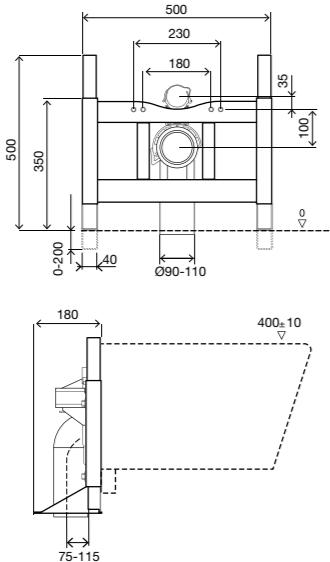

- Compatible with wall-hung WC pans;
- Drywall installation;
- Painted tubular frame;
- Frame tested for a 400kg load;
- Easy and quick installation;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- 10 year warranty.

Included

- WC fixing material;
- Frame fixing material (floor);
- Outlet bend and Ø90/110 adaptor.




CODE DESCRIPTION

616042 WC Free-standing

4 WC FIXATION POINTS

Sanitarblock

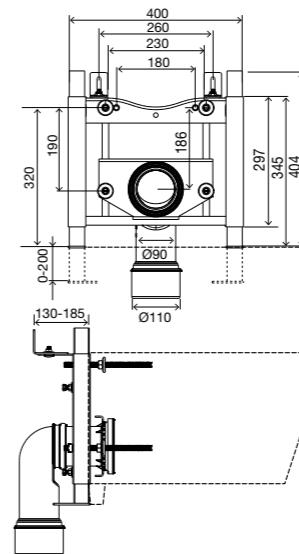

- Compatible with wall-hung WC pans with 4 fixations;
- Solid wall or drywall installation;
- Painted tubular frame;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- 10 year warranty.

Included

- WC pan fixing material;
- Frame fixing material;
- Outlet bend and Ø90/110 adaptor.




CODE DESCRIPTION

877930 4 WC Fixation Points Sanitarblock - axial connection

4 WC FIXATION POINTS


Free-standing



- Compatible with all-hung WC pans with 4 fixations;
- Drywall installation;
- Painted tubular frame;
- Frame tested for a 400kg load;
- Easy and quick installation;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- 10 year warranty.

Included

- WC fixing material;
- Frame fixing material (floor);
- Outlet bend and Ø90/110 adaptor;
- Horizontal outlet pipe 250mm.

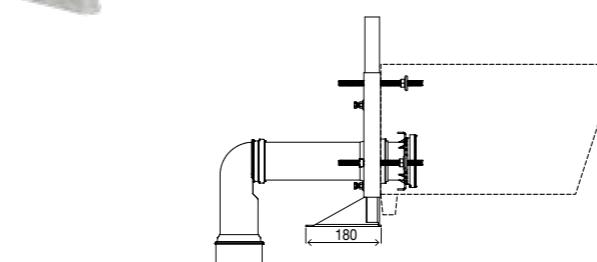


CODE DESCRIPTION

879027 4 WC Fixation Points Free-standing - axial connection

ECO WC/BIDET

Simflex

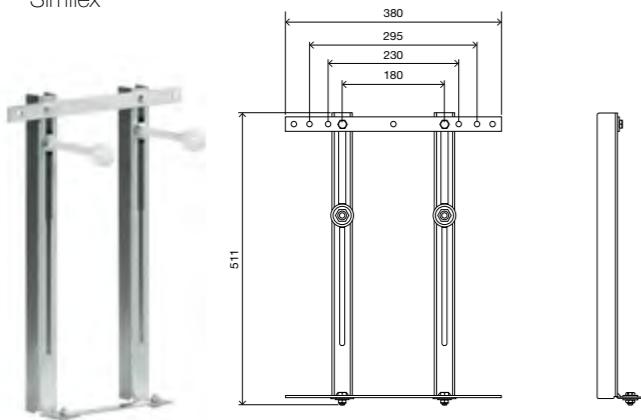


- Frame for wall-hung WC or bidet;
- Solid wall installation;
- Galvanized frame;
- Adjustable in height;
- 10 year warranty.

Included

- WC pan/Bidet fixing material;
- Frame fixing material.

ECO BIDET

Sanitarblock

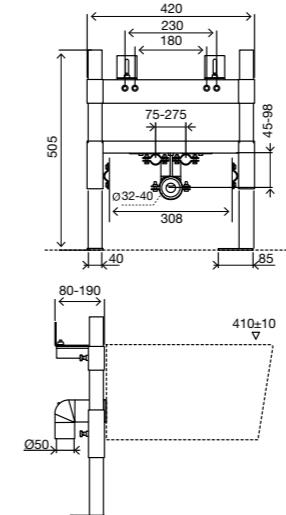

- Frame for wall-hung bidet;
- Solid wall or drywall installation;
- Painted tubular frame;
- Frame tested for a 400kg load;
- Adjustable height;
- Adjustable attachment plates;
- 10 year warranty.

Included

- Bidet fixing material;
- Frame fixing material;
- Outlet bend Ø 40 - 32/50 - 40.




CODE DESCRIPTION

883176 ECO WC/BIDET Simflex

BIDET

Simflex

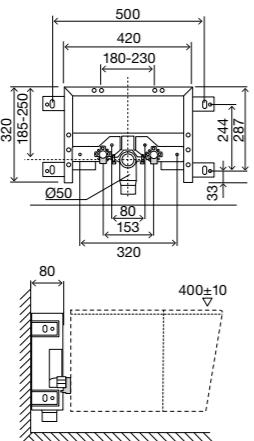

- Frame for wall-hung bidet;
- Solid wall installation;
- Galvanized frame;
- 80mm thick;
- Adjustable attachment plate;
- 10 year warranty.

Included

- Bidet fixing material;
- Frame fixing material;
- Outlet bend Ø 40-32/50-40.




CODE DESCRIPTION

006987 BIDET Simflex

BIDET

Sanitarblock

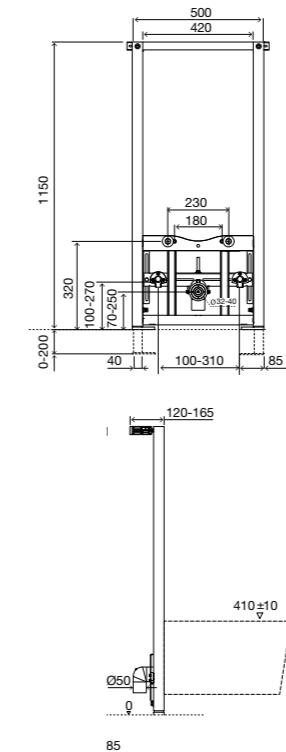

- Frame for wall-hung bidet;
- Solid wall or drywall installation;
- Painted tubular frame;
- Easy and quick installation with Fast-Fit system;
- Frame tested for 400kg;
- Height adjustable from 0 to 200mm;
- Adjustable mounting plates;
- 10 year warranty.

Included

- Bidet fixing material;
- Frame fixing material;
- Outlet bend Ø40mm - 32 / 50mm - 40mm;
- Two G ½ fittings for water connection.




CODE DESCRIPTION

136078 BIDET Sanitarblock

WASHBASIN

Simflex

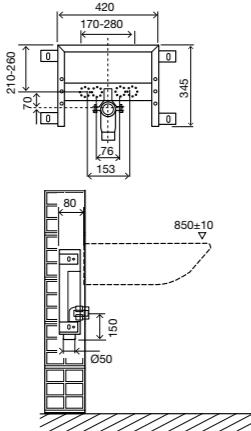

- Frame for wall-hung washbasin;
- Solid wall installation;
- Galvanized frame;
- 80 mm thick;
- Adjustable attachment plate;
- 10 year warranty.

Included


- Fixing material;
- Outlet bend Ø 40-32/50-40.


CODE DESCRIPTION

611011 WASHBASIN Simflex

WASHBASIN


Sanitarblock

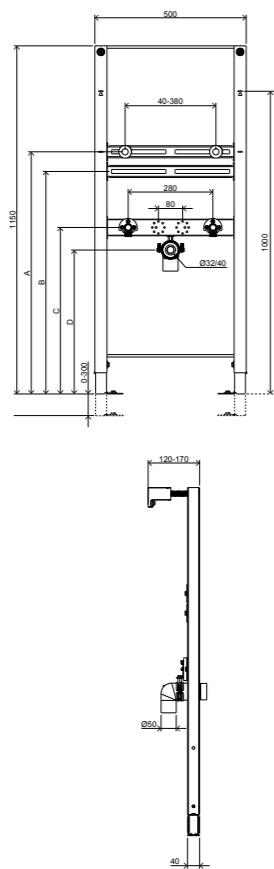

- Frame for wall-hung washbasin;
- Concealed siphon;
- Solid or drywall installation;
- Painted frame;
- Easy and quick installation with Fast Fit system;
- Height adjustable from 0 to 300mm;
- Fully adjustable mounting plates;
- One man assembly;
- 10 year warranty.

Included

- Washbasin fixing material;
- Frame fixing material;
- Outlet bend Ø40mm - 32 / 50mm - 40mm;
- Two G 1/2 fittings for water connection.

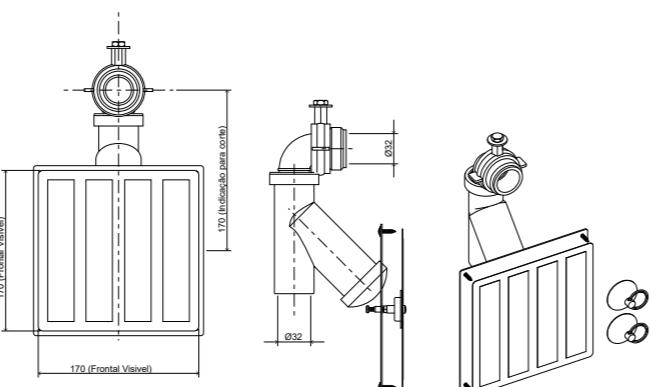

Note: accessory that
can be purchased
Code 883081


CODE DESCRIPTION


881857 WASHBASIN Sanitarblock NEW

881858 Wall tap or concealed urinal flush valve NEW

883081 Concealed siphon NEW

URINAL

Sanitarblock

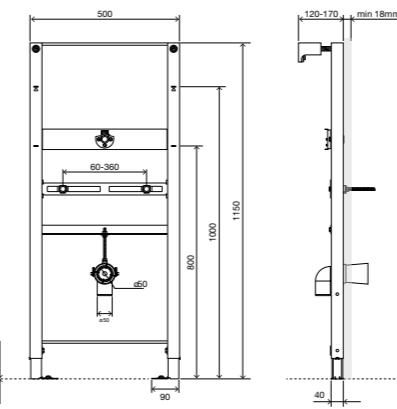

- Frame for wall-hung urinals;
- Solid wall or drywall installation;
- Painted tubular frame;
- Easy and quick installation with Fast Fit system;
- Frame tested for a 130kg load;
- Height adjustable from 0 to 200mm;
- Adjustable attachment plates;
- The flush valve has to be installed before closing the wall;
- One man assembly;
- 10 year warranty.

Included

- Frame fixing material;
- Outlet bend Ø 50/50 ;
- G 1/2" fitting for tap connection (adjustable);
- 1/2" flexible hose.

Compatibility

eAQUA urinal BLINK urinal SM15 urinal Globe urinal




Note: accessory that
can be purchased
Code 881858

CODE DESCRIPTION

882607 URINAL Sanitarblock

881858 Wall tap or concealed urinal flush valve

ECO URINAL FRAME

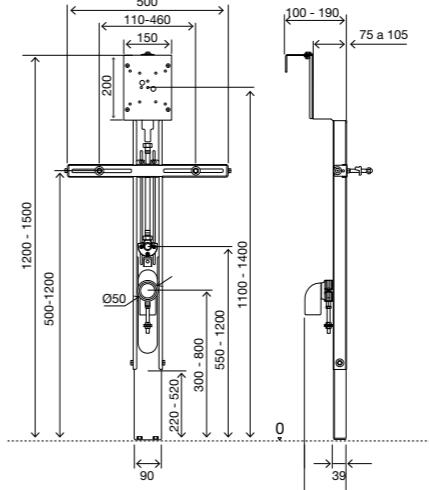

- Frame for wall-hung urinals;
- Easy installation, compact and light;
- Compatible with wall-hung urinal models and flush valve;
- For wall-hung urinals in wall fixing, solid wall or drywall installation;
- The flush valve has to be installed before closing the wall;
- Height adjustable from 0 to 300mm;
- 10 year warranty.

Included


- Frame fixing material;
- Outlet bend 50/50 (adjustable);
- G 1/2 fitting for tap connection (adjustable);
- 1/2 flexible hose.

Compatibility

eAQUA urinal BLINK urinal SM15 urinal Globe urinal



URINAL DIVIDER



- Frosted glass;
- Tempered Glass 8mm thick;
- Stainless steel fixing accessories;
- Fixation directly to the wall, drywall or solid wall;
- Compatible with Easy Structure.

Included

- Urinal divider fixing material.



CODE DESCRIPTION

000079 URINAL DIVIDER



EASY STRUCTURE


Sanitarblock

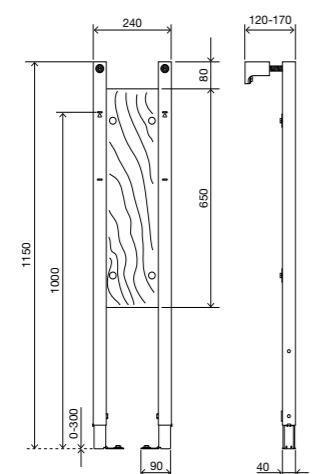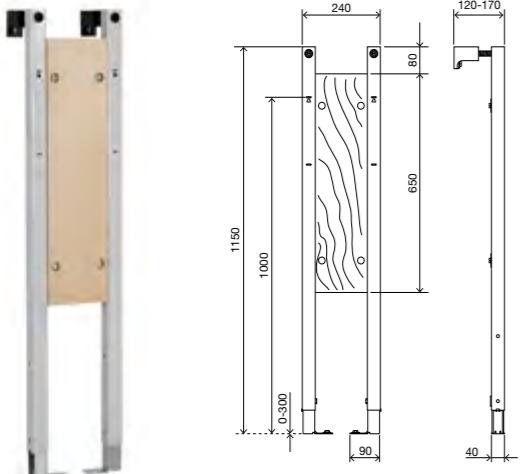

- Frame for wall-hung urinal dividers;
- Solid wall or drywall installation;
- Painted tubular frame;
- Easy and quick installation with Fast-Fit system;
- Adjustable height from 0 to 200mm;
- Strengthened plywood;
- One man assembly;
- 10 year warranty.

Included

- Frame fixing material.

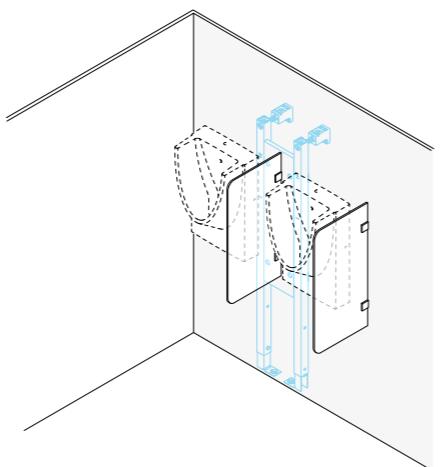

CODE DESCRIPTION



031526 EASY Sanitarblock





ACCESSORIES

STOP FIRE

OLI120 PLUS, OLI120, OLI74 PLUS and QUADRA PLUS

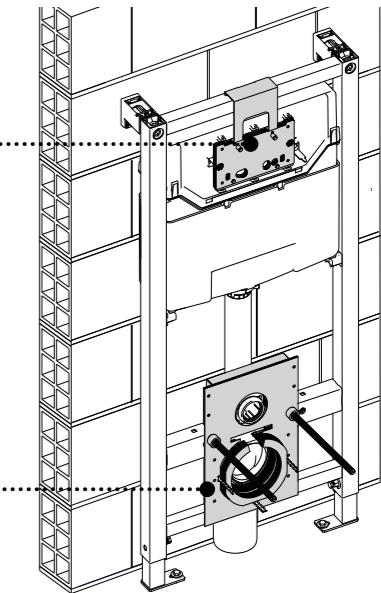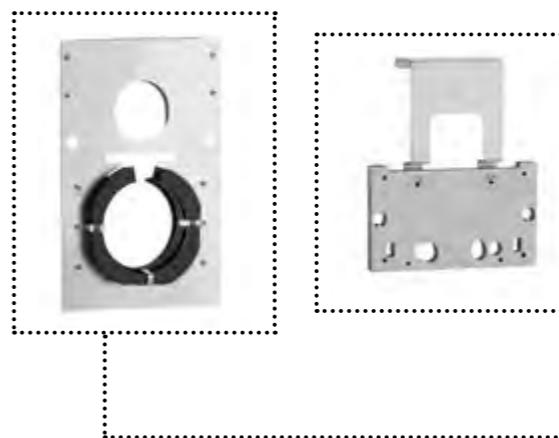

EXPERT PLUS

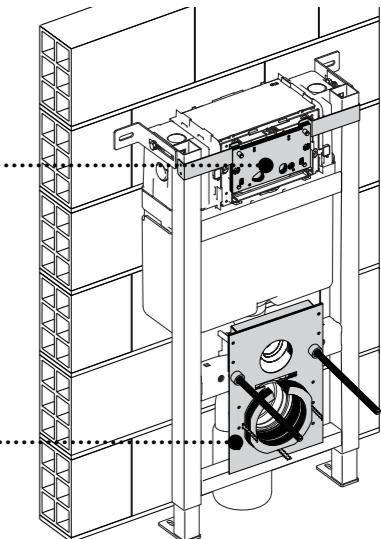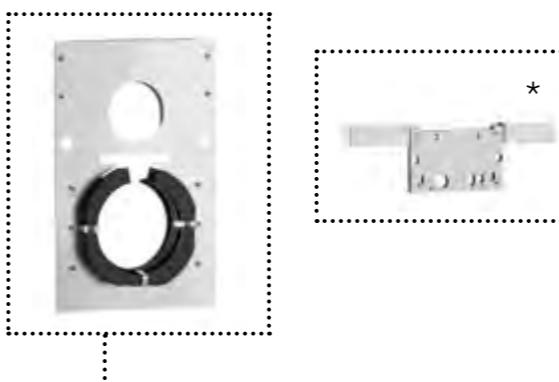

- Compatible with:
OLI120 PLUS, OLI120, OLI74 PLUS, QUADRA PLUS
and EXPERT PLUS*.
- Compatible with control plates:
Glam, Narrow, Globe and Plain.
- Product compliant with EN 13501-2:2016.




CODE DESCRIPTION

879808 STOP FIRE

Prevents the spread of fire and smoke between divisions for (120 min).

OLI120 PLUS


PNEUMATIC CONVERSION KIT

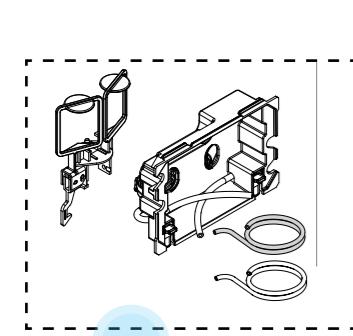


- 2 pneumatic pipes with 350mm;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

CODE DESCRIPTION

154084 Pneumatic conversion Kit OLI120 PLUS

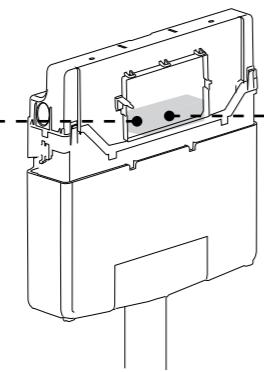

ELECTRONIC CONVERSION KIT




- Pre-installation of the electric connection is needed;
- Transformer is not supplied.


CODE DESCRIPTION

154085 Electronic conversion Kit OLI120 PLUS

HYDROBOOST CONVERSION KIT

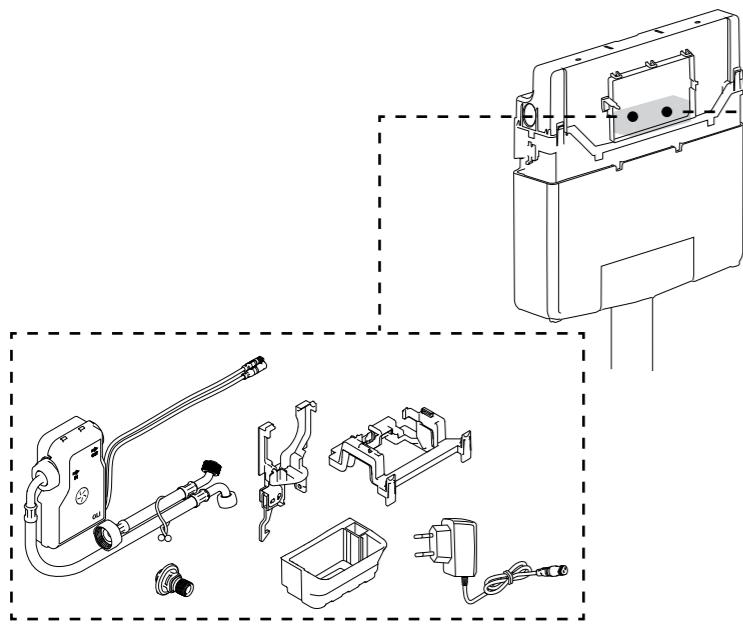

AC CONVERSION KIT

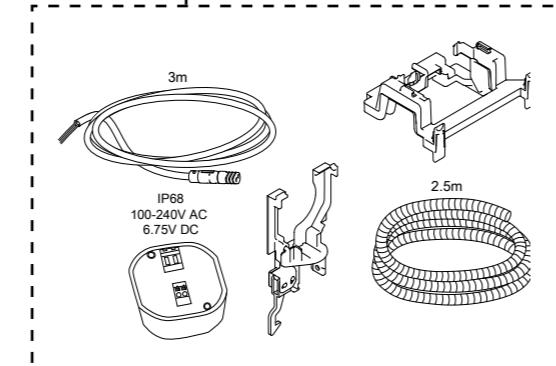


- Pre-installation of the electric connection is needed;
- Transformer is supplied.

CODE DESCRIPTION

878294 Hydroboost conversion Kit OLI120 PLUS

OLI74 PLUS

PNEUMATIC CONVERSION KIT

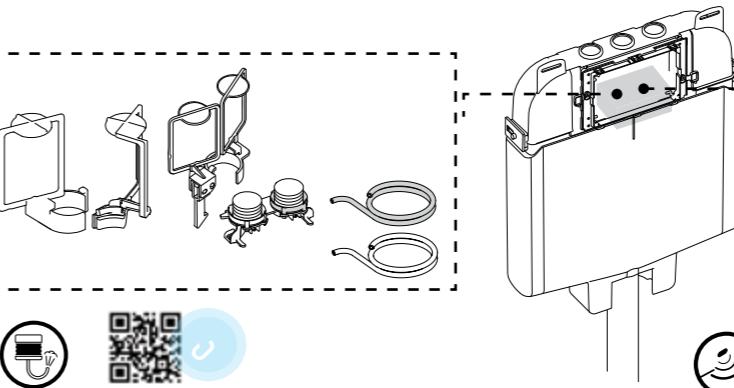


- 2 pneumatic pipes with 350mm;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

CODE DESCRIPTION

601527 Pneumatic conversion kit OLI74 PLUS

ELECTRONIC CONVERSION KIT





- Pre-installation of the electric connection is needed;
- Transformer is not supplied.


CODE DESCRIPTION

077754 Electronic conversion kit OLI74 PLUS

HYDROBOOST CONVERSION KIT

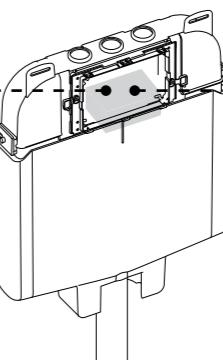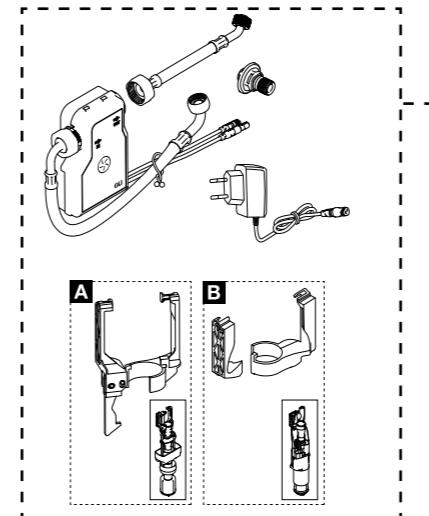

AC CONVERSION KIT

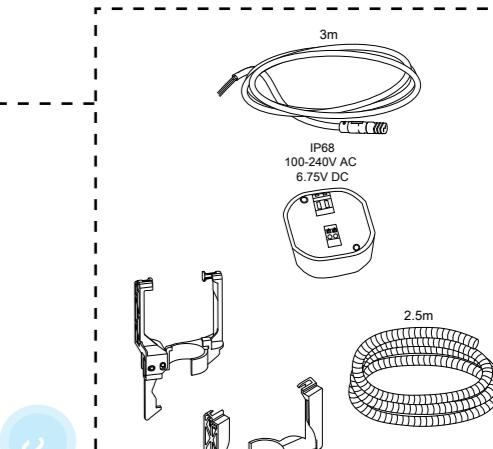



- Transformer is supplied;
- Pre Installation of the electronic components.

CODE DESCRIPTION

878292 AC conversion kit OLI 74 PLUS

FIXATION KIT

Direct for drywall installation.

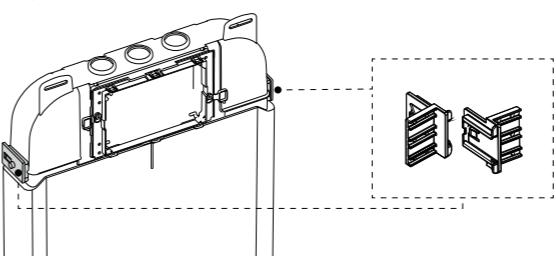


CODE DESCRIPTION

216640 Fixation kit for OLI74 PLUS

EXPERT PLUS

MECHANIC CONVERSION KIT
FOR TOP ACTUATION




- Compatible with top actuation control plates: Glam; Narrow; Globe and Plain.

CODE	DESCRIPTION
211743	Mechanic conversion kit EXPERT PLUS - top actuation



PNEUMATIC CONVERSION KIT




CODE	DESCRIPTION
556807	Pneumatic conversion kit EXPERT PLUS



QUADRA PLUS



PNEUMATIC CONVERSION
KIT

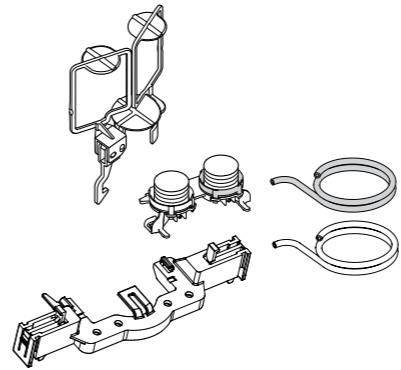

- 2 pneumatic pipes with 2,5m;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

CODE	DESCRIPTION
101773	Pneumatic Conversion Kit for QUADRA PLUS


SANITARBLOCK
CORNER KIT

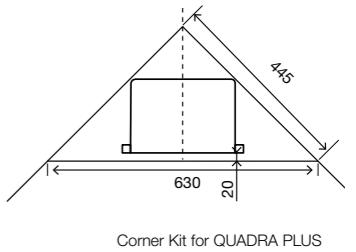

- Compatible with 1150/1130mm sanitarblock frames.

CODE	DESCRIPTION
719183	Sanitarblock Corner Kit

MECHANIC CONVERSION KIT

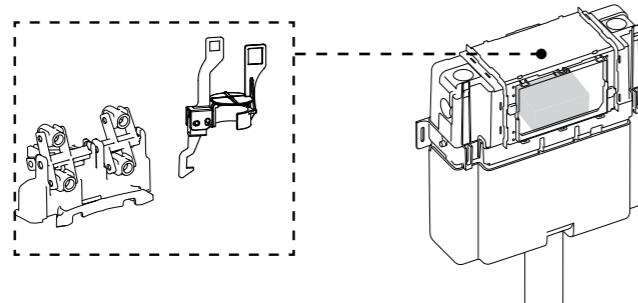


- Outlet valve mechanical anchors;
- Levers.

CODE	DESCRIPTION
601038	Mechanic Conversion Kit for EXPERT PLUS

OLIPURE

OLIPURE KIT

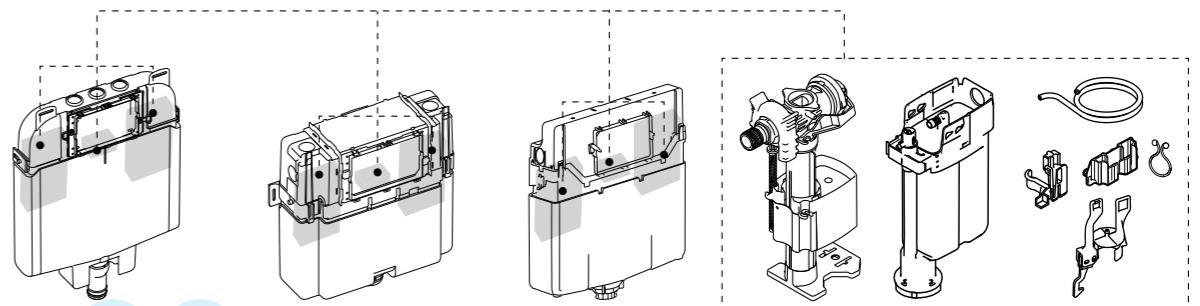

CODE	DESCRIPTION
882129	OLIPure kit

AMBIWAVE





- Liquid disinfectant for WC;
- 450ml dosage;
- 12 units per pack.

CODE	DESCRIPTION
879955	AMBIWAVE - OLIPure

CONNECTING PIPES

PP OUTLET BEND ADAPTOR Ø90/110 WC OUTLET BEND

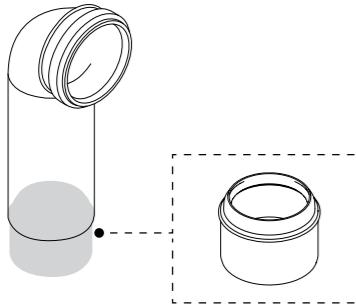


- WC outlet bend for wall-hung WC pans.

CODE	DESCRIPTION
086360	PP Adaptor Ø90/110

CODE	DESCRIPTION
036888	PP WC outlet bend L - 340, D1 - Ø90, D2 - Ø90
622002	HPDE WC outlet bend L - 300, D1 - Ø90, D2 - Ø110
622003	HPDE WC outlet bend L - 300, D1 - Ø110, D2 - Ø110
622004	HPDE WC outlet bend L - 230, D1 - Ø90, D2 - Ø100
622005	HPDE WC outlet bend L - 230, D1 - Ø110, D2 - Ø100



DOUBLE OUTLET BEND

- Double outlet bend for wall-hung WC pans horizontal installation.

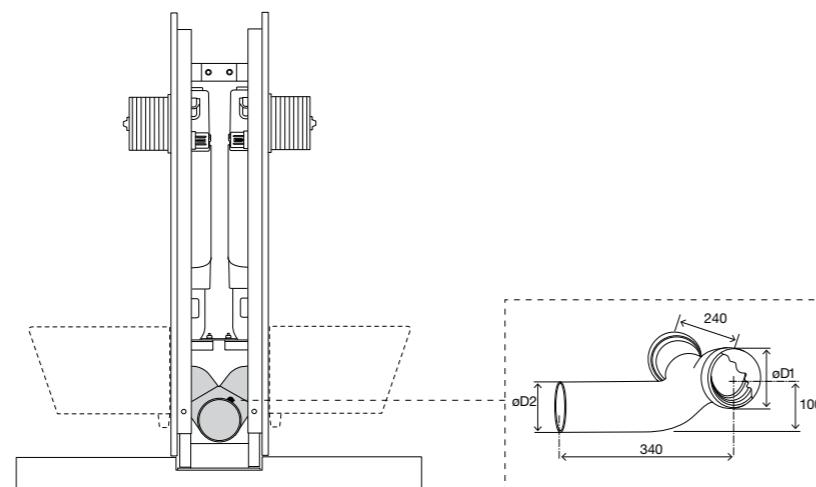


CODE	DESCRIPTION
622022	Double HPDE WC outlet bend D1 - Ø90, D2 - Ø110

S-BEND OUTLET

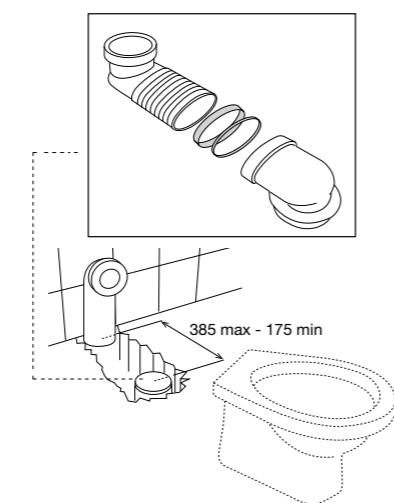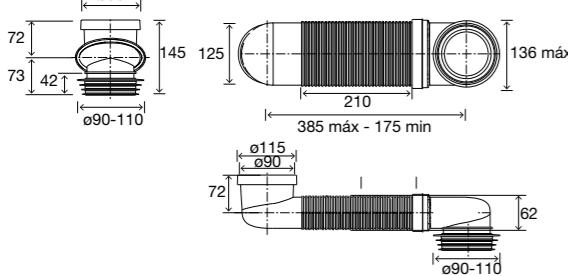


CODE	DESCRIPTION
108185	S-bend outlet

FLEXIBLE OUTLET WC

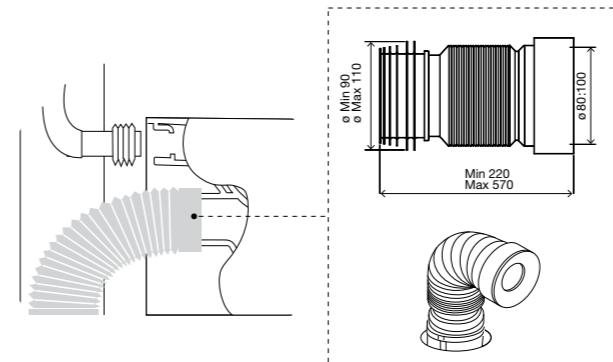


CODE	DESCRIPTION
079929	Flexible outlet WC bend

HORIZONTAL OUTLET WC

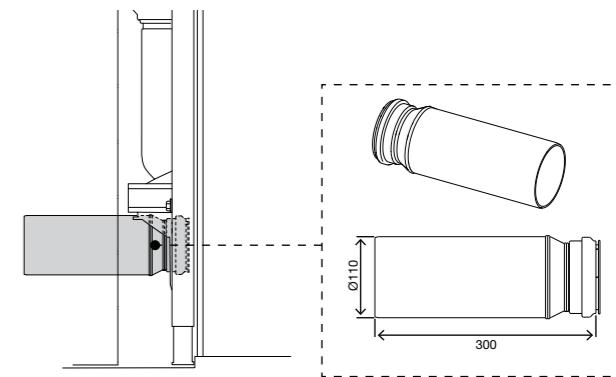

CODE	DESCRIPTION
108380	Horizontal outlet WC


DOUBLE OUTLET BEND

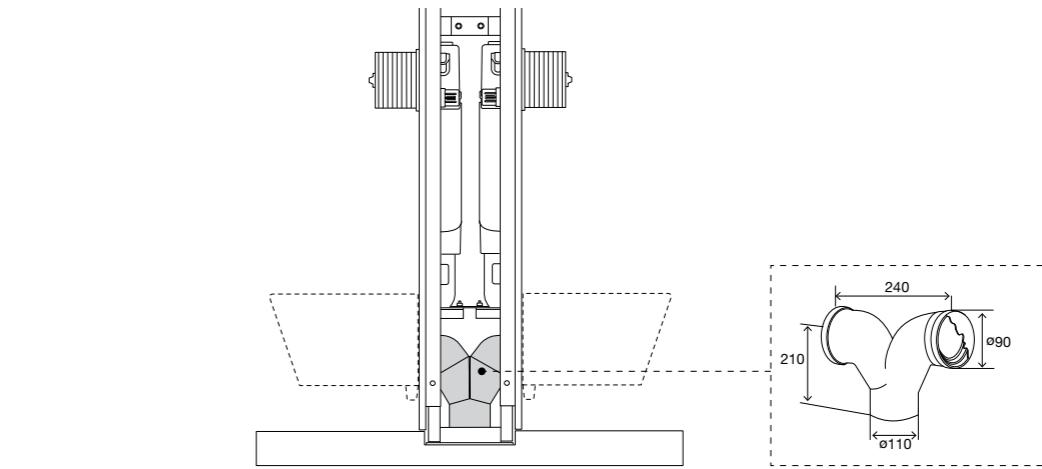

- Double outlet bend for wall-hung WC pans.

CODE	DESCRIPTION
880700	Double HPDE WC outlet bend


FLOW RATE REDUCER FOR OLI IN-WALL CISTERNS

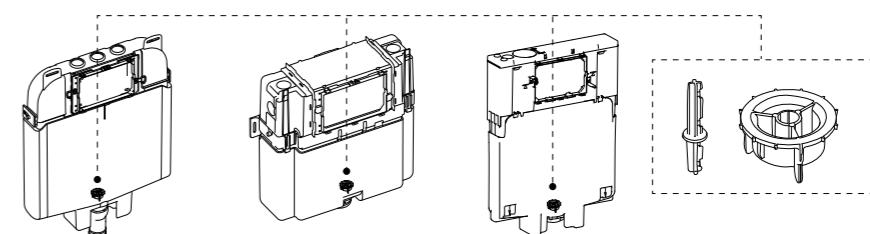

- Compatible with OLI74 PLUS, EXPERT PLUS and OLI80;
- Can be installed after the cistern inside the wall.

CODE	DESCRIPTION
014874	Flow rate reducer for OLI In-Wall cisterns


TELESCOPIC CONNECTING PIPE

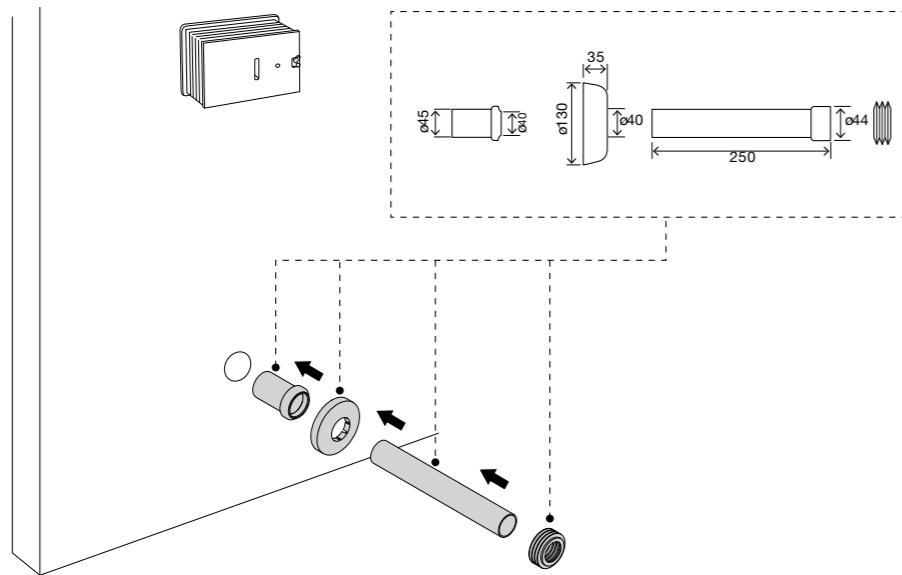

CODE DESCRIPTION

602501 Telescopic connecting pipe Ø45/40 x 130 White

FLEXIBLE FLUSH PIPE EXTENSION


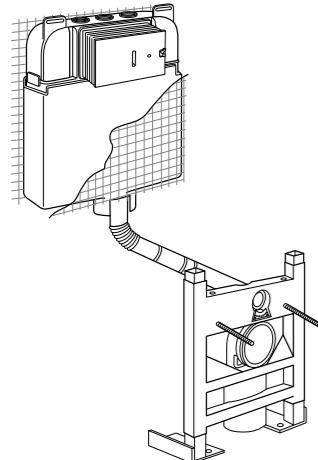


- Compatible with all OLI in-wall cisterns.

NOTE: For EXPERT PLUS and QUADRA PLUS an additional flush pipe (code 021266) is necessary.

CODE DESCRIPTION


622401 Flexible flush pipe extension

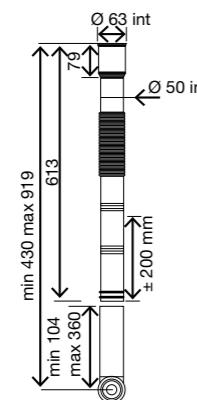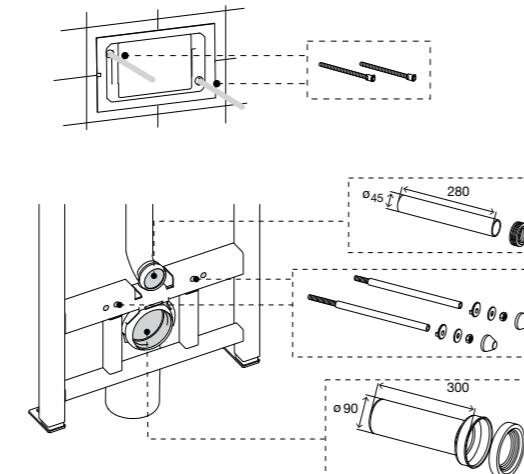LONGER SLEEVES FOR
WALL-HUNG WC PAN

- Outlet pipe Ø90xØ125x300;
- Rubber seal for outlet pipe Ø125;
- Connection WC pan pipe Ø45x280;
- Rubber seal for WC pan Ø45;
- M12x300 rods for wall-hung fixation (x2);
- Fixing WC pan accessories (white);
- Counter plate fixation screws.

CODE DESCRIPTION

011229 Longer sleeves for wall-hung WC pan

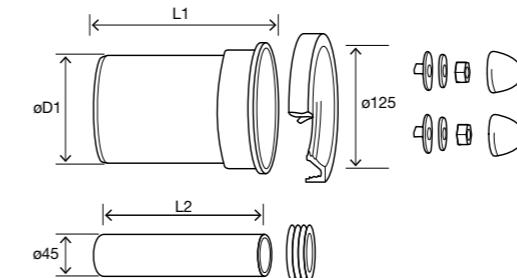SLEEVES FOR WALL-HUNG
WC PAN

CODE DESCRIPTION


622501 Sleeves for wall-hung pan L1 - 250 L2 - 180, D1 - Ø90

622503 Sleeves for wall-hung pan L1 - 250, L2 - 180, D1 - Ø110

622523 Sleeves for wall-hung pan L1 - 300, L2 - 300, D1 - Ø110

- Outlet pipe ØD1xØ125xL1;
- Rubber seal for outlet pipe Ø125;
- Connection WC pan pipe Ø45xL2;
- Rubber seal for WC pan Ø45;
- Fixing WC pan accessories (white).

CONNECTING PIPES

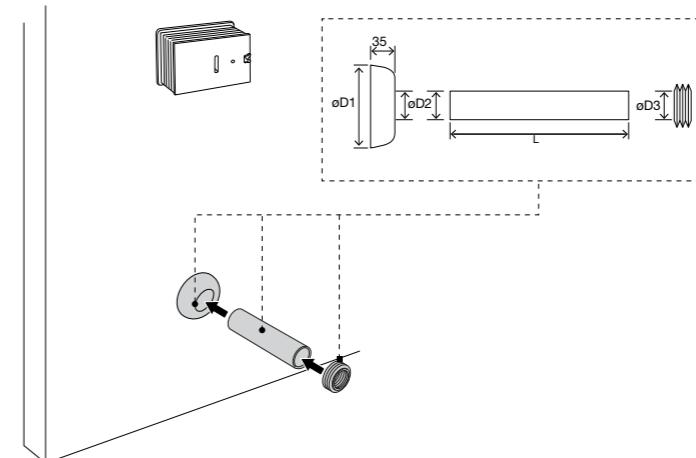

CODE DESCRIPTION

602101 Connecting pipe L - 280, D1 - Ø130, D2 - Ø40, D3 - Ø40 White


602001 Connecting pipe L - 280, D1 - Ø90, D2 - Ø30, D3 - Ø32 White

602201 Connecting pipe L - 280, D1 - Ø90, D2 - Ø45, D3 - Ø45 White

602301 Connecting pipe L - 500, D1 - Ø90, D2 - Ø40, D3 - Ø40 White

OTHERS


PROTECTIVE CAPS

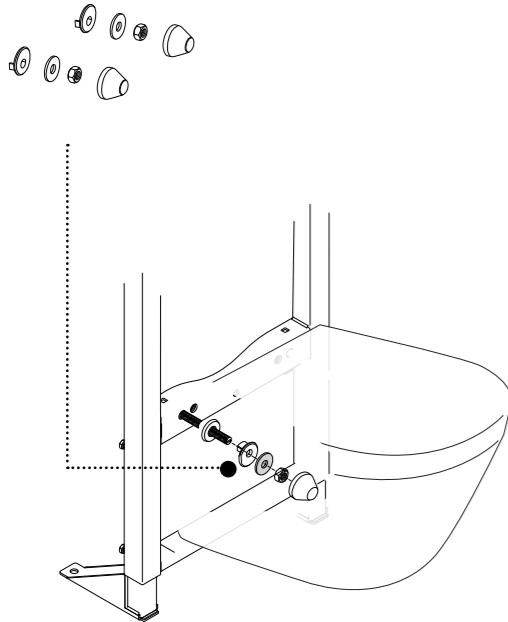

- Fixation nuts and washers with protective caps.

CODE	DESCRIPTION
622301	Protective caps White
622303	Protective caps Polished chrome


POWER SUPPLY

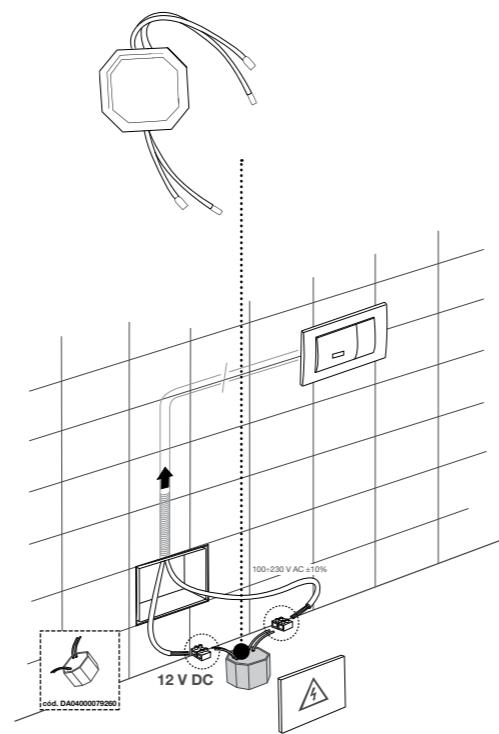

- Input: 100 - 240 V AC;
- Output: 12 V DC.


CODE	DESCRIPTION
079260	230/12V switch mode power supply

PNEUMATIC PIPE

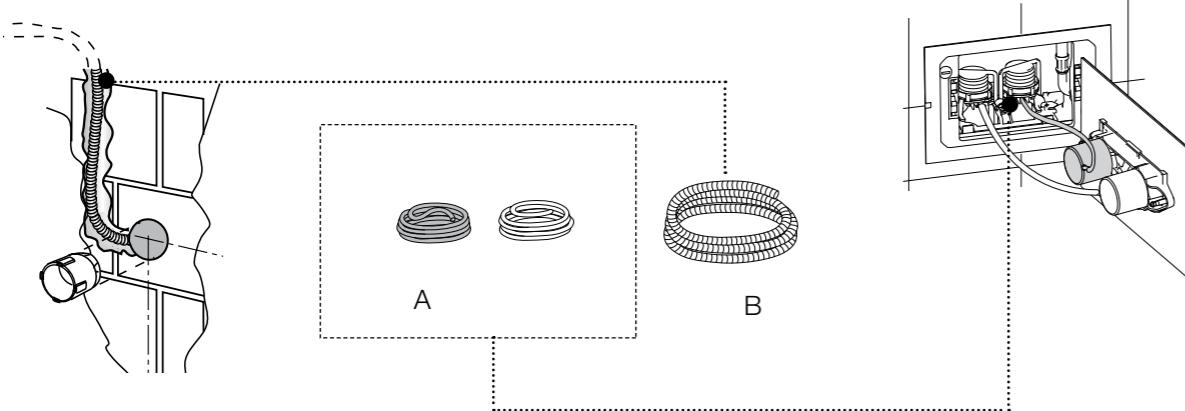

CODE	DESCRIPTION
043234	3m Pneumatic Pipe (x2) - A
049544	1.8m Protection Pipe - B


FLOOR SUPPORT SYSTEM WITH LATERAL FIXATION FOR SIMFLEX FRAMES

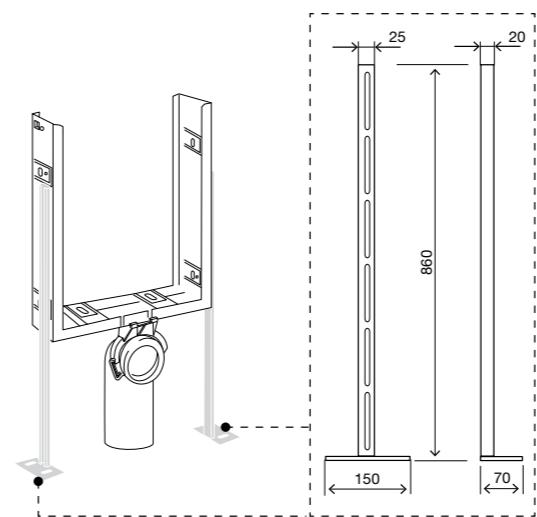

- Compatible with OLI Simflex frames;
- Fixing material included.


CODE	DESCRIPTION
059272	Floor support system with lateral fixation for Simflex frames

KIT DUPLEX

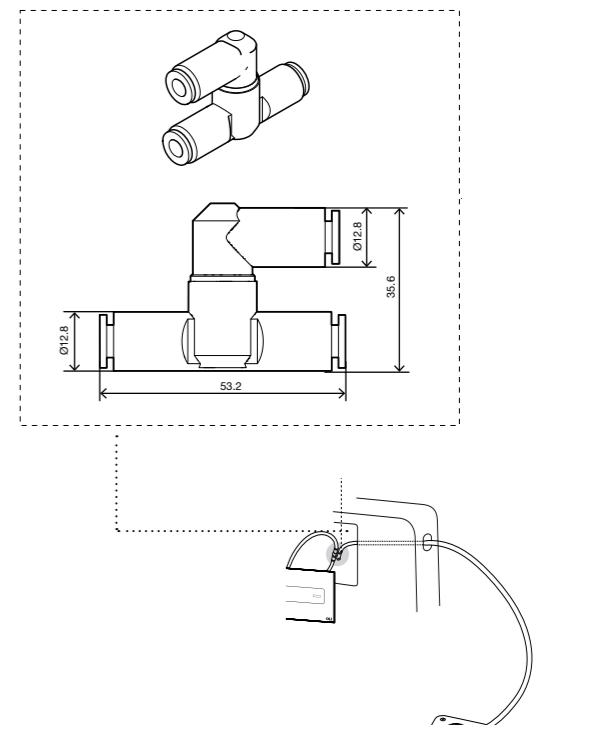

CODE	DESCRIPTION
216252	Kit duplex


ACOUSTIC INSULATION FOR WALL-HUNG PAN AND BIDET

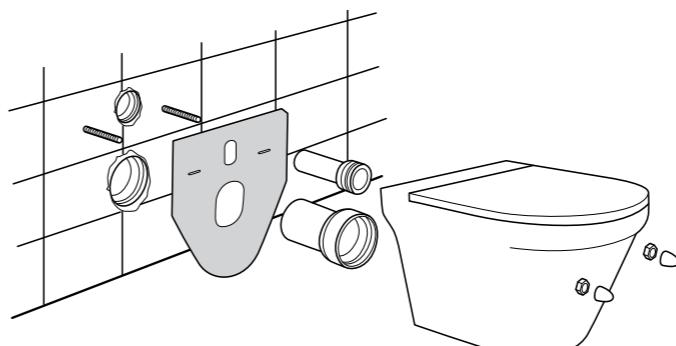

- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the sanitaryware and the tile.

CODE	DESCRIPTION
620071	Acoustic insulation for wall-hung pan and bidet

ACOUSTIC INSULATION FOR WALL-HUNG WASHBASIN

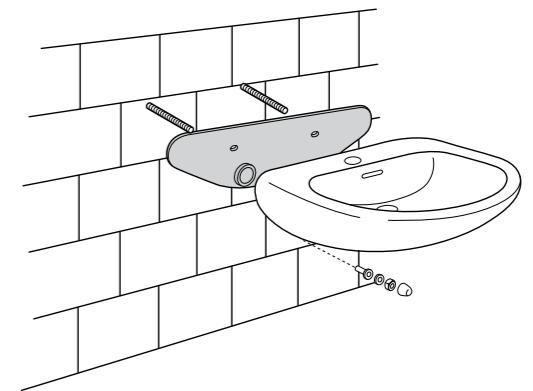

- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the sanitaryware and the tile.

CODE	DESCRIPTION
620072	Acoustic insulation for wall-hung washbasin

CONTROL PLATES



878700
GLASSY
Gold




NO-TOUCH
[Page 119](#)



PNEUMATIC
Pneumatic actuators
Foot control
Inspection plates
[Page 123](#)



MECHANICAL
[Page 134](#)



ELECTRONIC
[Page 139](#)





URINOL
[Page 140](#)



CONTROL PLATES

OLI

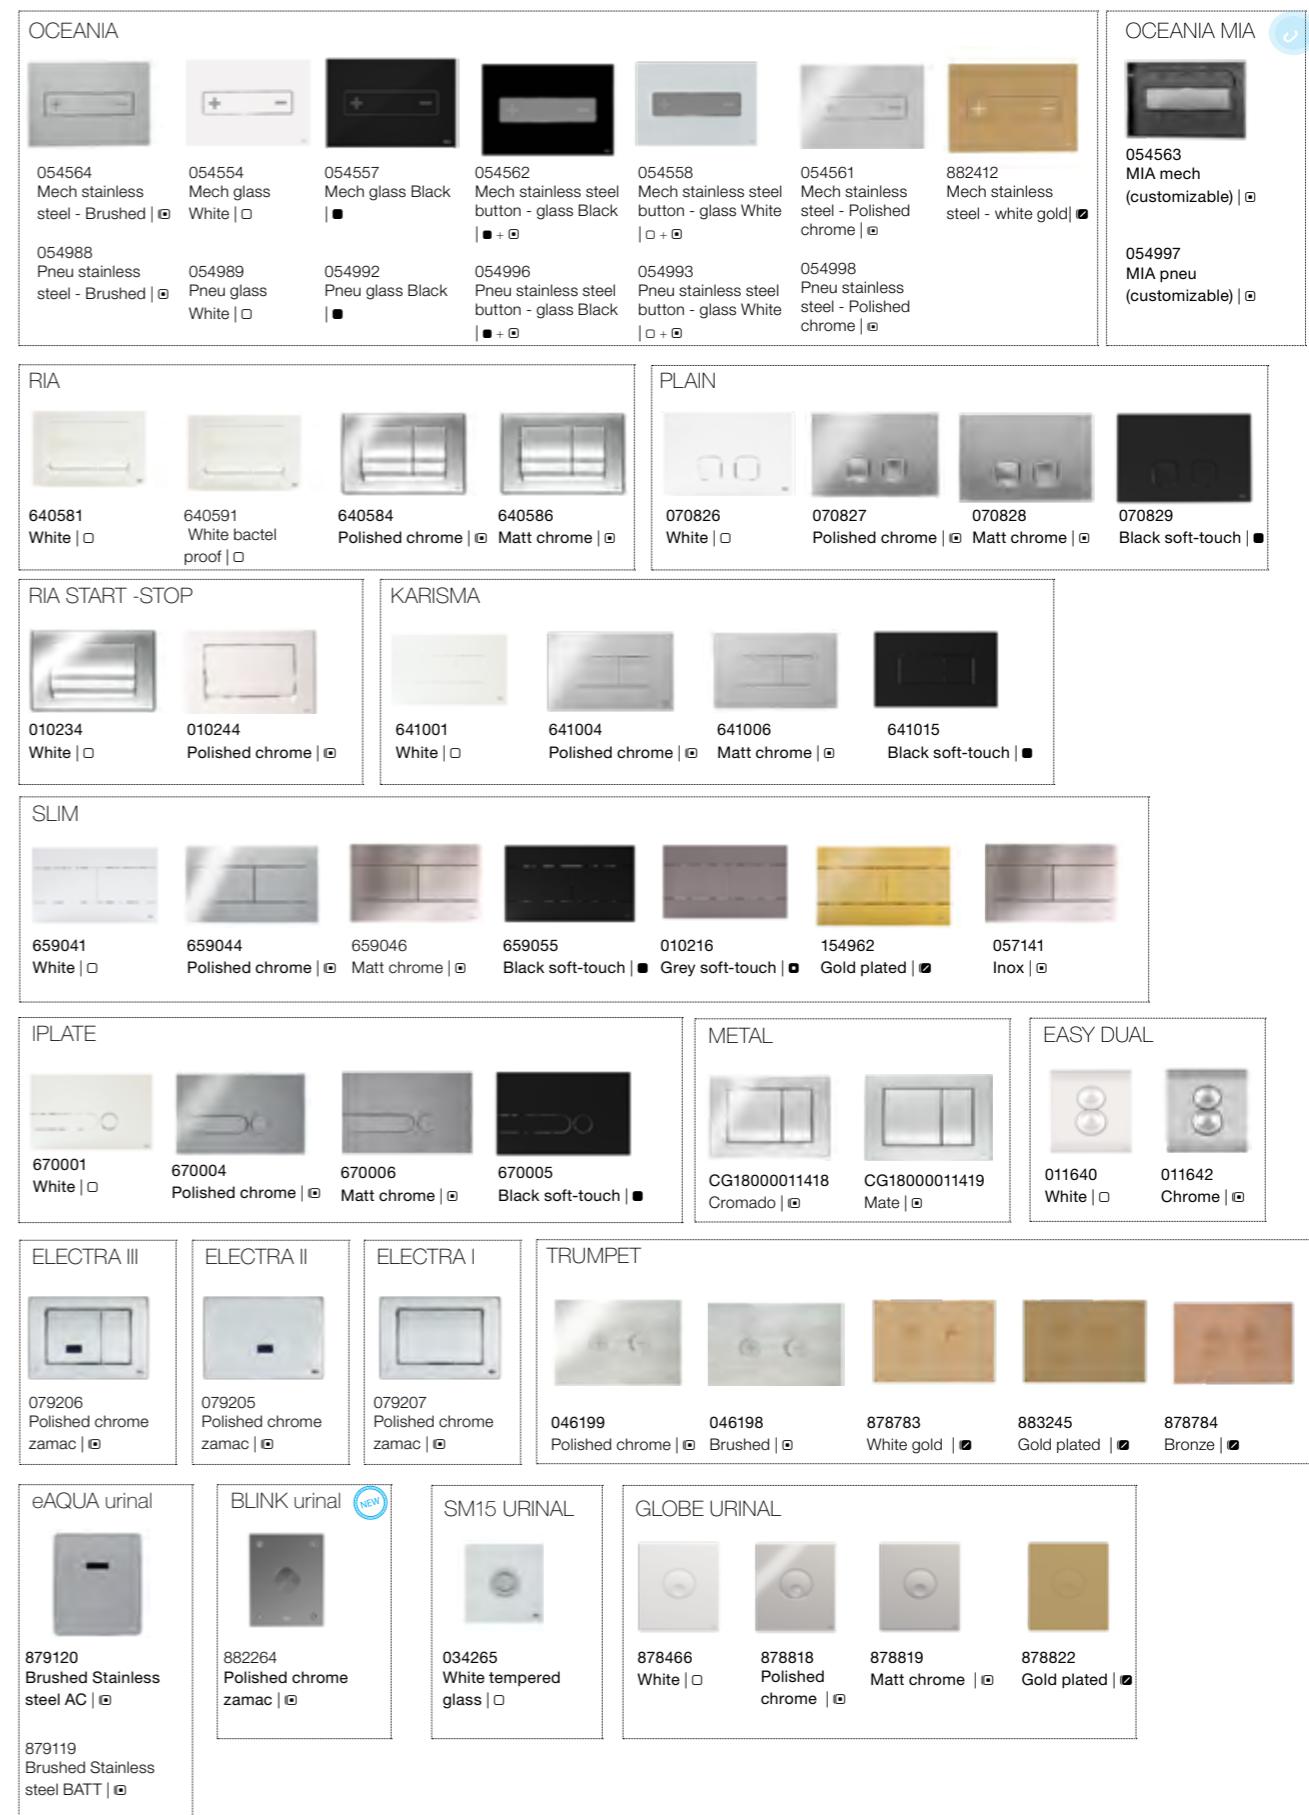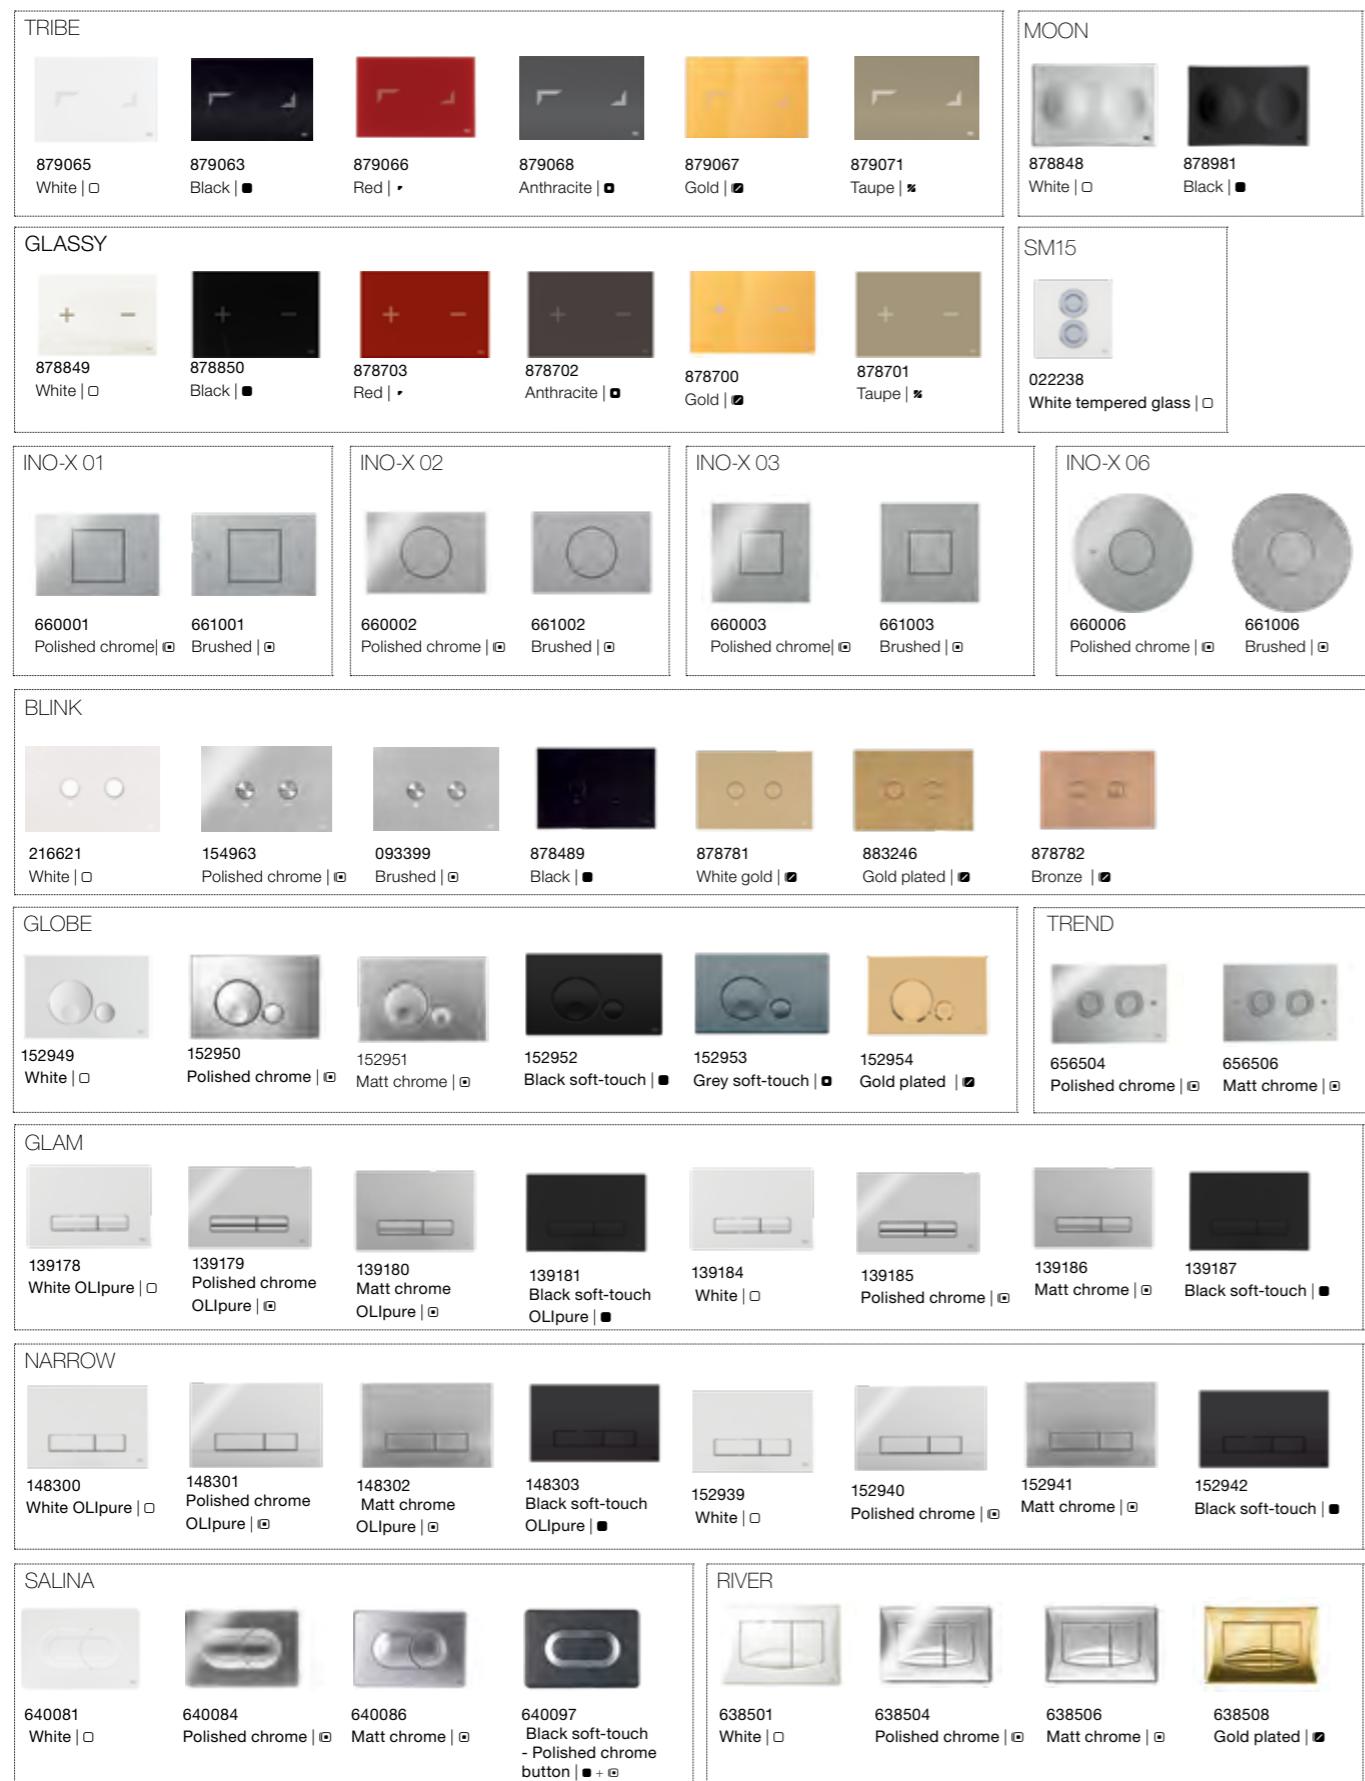

COMPATIBILITY MATRIX



DESIGN PLUS



TRIBE MOON GLASSY TRUMPET SM15 INO-X OCEANIA BLINK NARROW GLAM GLOBE PLAIN



SLIM iPLATE RIA STOP RIA RIVER TREND SALINA KARISMA EASY DUAL METAL ELECTRA III

some versions compliant with

		Minimum 10mm		Minimum 10mm		Minimum 10mm		Minimum 25mm		Minimum 35mm		Minimum 10mm		Minimum with OLIPURE 25mm		Minimum with OLIPURE 25mm		Minimum 15mm		Minimum 15mm		Minimum 15mm		Minimum 20mm		Minimum 20mm		Minimum 20mm		
--	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	---------------------------	--	---------------------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--

		Minimum 25mm		Minimum 15mm		Minimum 10mm		Minimum 10mm		Minimum 25mm		Minimum 15mm		Minimum 10mm		Minimum 10mm		Minimum 25mm										
--	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--

		Minimum 10mm		Minimum 10mm		Minimum 10mm		Minimum 25mm		Minimum 25mm		Minimum with OLIPURE 5mm		Minimum with OLIPURE 5mm		Minimum 25mm		Minimum 25mm		Minimum 25mm												
--	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------------------	--	--------------------------	--	-------------	--	-------------	--	-------------	--	-------------	--	-------------	--	--------------	--	--------------	--	--------------	--	--

		Minimum 10mm																											
--	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--	--	--	--

						Minimum front application 0mm		Minimum top application 30mm		Minimum with OLIPURE 5mm		Minimum with OLIPURE 5mm		Minimum front application 0mm		Minimum top application 30mm		Minimum front application 0mm												
--	--	--	--	--	--	-------------------------------	--	------------------------------	--	--------------------------	--	--------------------------	--	-------------	--	-------------	--	-------------	--	-------------	--	-------------	--	-------------------------------	--	------------------------------	--	-------------------------------	--	--

				Minimum 15mm		Minimum 15mm		Minimum 10mm		Minimum 5mm		Minimum 5mm		Minimum 5mm		Minimum 15mm		Minimum 15mm		Minimum 15mm									
--	--	--	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	--------------	--	-------------	--	-------------	--	-------------	--	--------------	--	--------------	--	--------------	--

NOTE: The measurements mentioned in the table above, refer to the minimum wall thickness.
Example: Control plate TRIBE, in the in-wall cistern OLI120 PLUS needs a minimum front wall thickness of 10mm.

*EXPERT PLUS – Front Application: Ok
EXPERT PLUS – Top Application: See kit code 211743 page 104.



PNEUMATIC VERSION



VERSION NO-TOUCH



ELECTRONIC VERSION





MECHANICAL VERSION

measurements are in mm



MOON

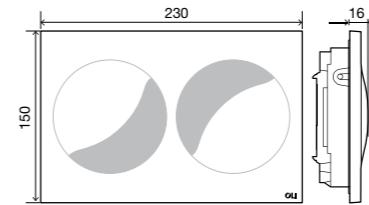DESIGN PLUS
powered by ISHarchiproducts
DESIGN AWARDS
— WINNER 2019**No-touch actuation**

The use of capacitive sensors enabled OLI to develop the concept around a one-piece ceramic plate with innovative formal and tactile features that ensure superior hygiene levels and ergonomics.

Simple and intuitive

The simple and elegant design of the Moon plate combines high technology with tradition, resulting in a smooth and comfortable interface for the user, whose elegance of shapes highlights the dual flush and favours the half flush.

- One-piece in white or black ceramic material;
- Dual flush;
- No-touch actuation through capacitive sensors;
- Compatible with Hydroboost or AC system;
- Hygienic and easy to clean;
- Gull-Wing opening system, which prevents damages;
- Anti-error electronic connections;
- Waterproof connectors;
- 2 year warranty.

Hydroboost

- Uses the energy of water in motion;
- Generates and stores power from the water that fills the toilet tank;
- Energy is used to activate the flush;
- There is no need to connect to the power grid or to replace batteries;
- Self-sustainable;
- Self-sufficient sensor actuation system;
- Suitable for intensive use.

AC POWER-MAINS

- Innovative concept with capacitive sensors;
- Easy installation;
- Plug and Play.




CODE DESCRIPTION

878848 MOON White878981 MOON Black





TRIBE

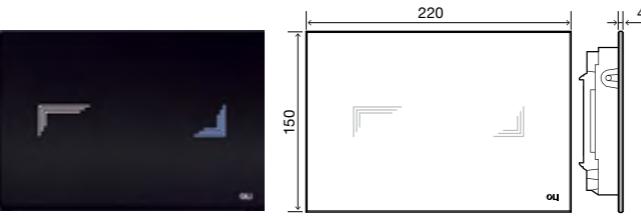

- No-touch actuation through capacitive sensors with led signs, multiple colours available;
- Dual flush;
- Compatible with Hydroboost or AC system;
- Hygienic and easy to clean;
- Gull-Wing opening system, which prevents damages;
- 4mm thick;
- Anti-error electronic connections;
- Waterproof connectors;
- One-piece tempered glass;
- 2 year warranty.



GLASSY

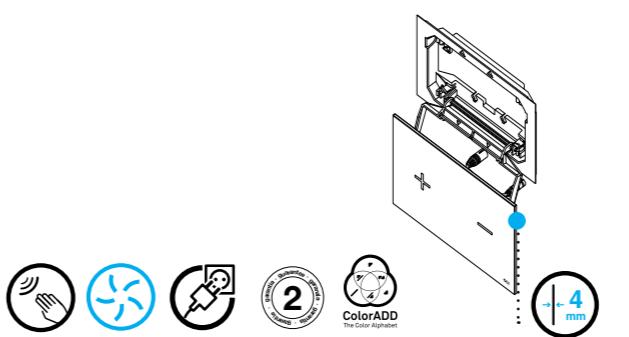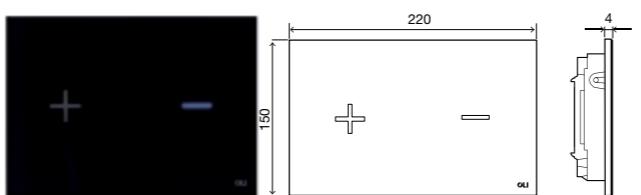

CODE	DESCRIPTION
878849	□ GLASSY White
878850	● ■ GLASSY Black
878703	● ▶ GLASSY Red
878702	● □ GLASSY Anthracite
878700	● □ GLASSY Gold
878701	● ▲ GLASSY Taupe

- No-touch actuation through capacitive sensors with led signs, multiple colours available;
- Dual flush;
- Compatible with Hydroboost or AC system;
- Hygienic and easy to clean;
- Gull-Wing opening system, which prevents damages;
- 4mm thick;
- Anti-error electronic connections;
- Waterproof connectors;
- One-piece tempered glass;
- 2 year warranty.





NOTE: See compatible control plates on page 116.

measurements are in mm 121




Álvaro Siza Vieira is a world-renowned architect who has collected several international awards, Pritzker Prize in 1992; The Wolf Prize of Arts in 2001; the Golden Lion for Lifetime Achievement in 2012; the Fritz Hoger award in 2014, just to name a few. The Trumpet control plate was designed by Álvaro Siza Vieira and is the perfect combination of elegance and harmony, both characteristics of a trumpet. In 2016, the "Trumpet" was selected "Best of Category" for the "Archiproducts Design Awards" one of the most prestigious awards of Architecture and Design worldwide.

TRUMPET

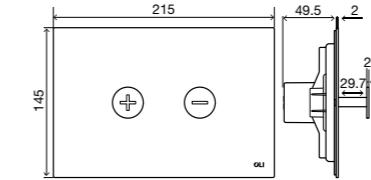

- Designed by Architect Siza Vieira;
- Dual flush;
- Pneumatic actuation;
- Actuation force <20N;
- 2mm thick;
- Stainless steel material;
- 2 year warranty.

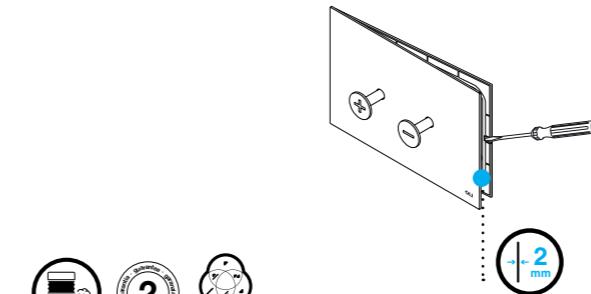


CODE DESCRIPTION

046199	<input checked="" type="radio"/>	TRUMPET Polished chrome
046198	<input checked="" type="radio"/>	TRUMPET Brushed
883246	<input checked="" type="radio"/>	TRUMPET Gold plated
878783	<input checked="" type="radio"/>	TRUMPET White gold
878784	<input checked="" type="radio"/>	TRUMPET Bronze

"I am very pleased with the prestigious "Best of Category 2016" award for the Trumpet control plate. The quality achieved is due to the competent and committed contribution of the technicians at OLI. It was a pleasure to evolve the design of the control plate with them.

Álvaro Siza
Alvaro Siza

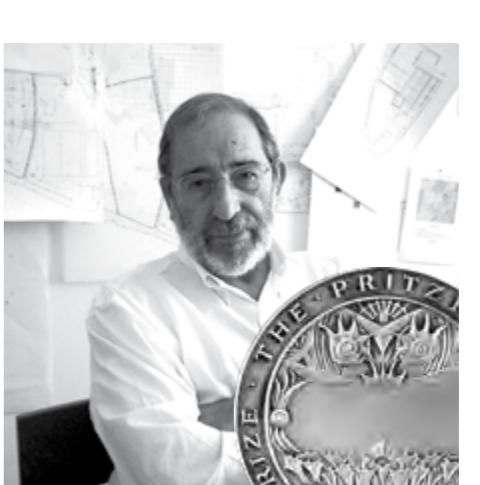


Siza Vieira - one of the most prestigious and renowned Portuguese architects, with a Pritzker Prize and the Golden Lion for Lifetime Achievement, to name a few - designed a true masterpiece, inspired in an instrument played by great maestros: the trumpet. OLI is proud to present the "Trumpet", the perfect balance between a truly unique design and exceptional music.



NOTE: See compatible control plates on page 116.

measurements are in mm 123

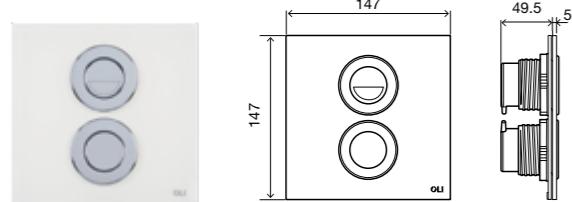


- Designed by Architect Souto de Moura;
- Dual flush;
- Pneumatic actuation;
- Actuation force <20N;
- Installation on the surface wall with 150mm x150mm tiles;
- White tempered glass material;
- 2 year warranty.




CODE **DESCRIPTION**

022238 SM15 White tempered glass

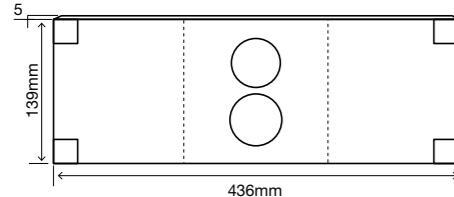

The support and inspection plate has the necessary dimensions to apply the control plate and two Portuguese tiles in the extremities, in order to ensure access to the in-wall cistern for maintenance.

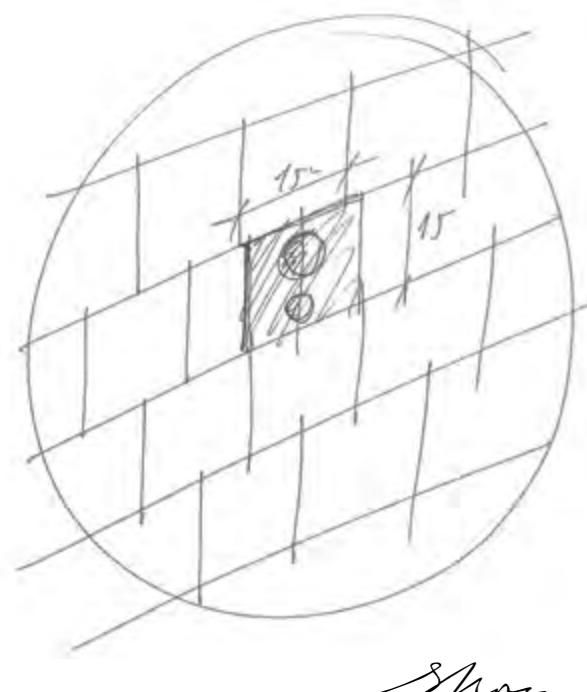

Compatibility

Matching urinal control plate also available.
(see page 134 for more information)




Eduardo Souto de Moura



Souto de Moura is a renowned Portuguese architect who has been presented with various international awards, such as, the Gold Medal of Heinrich Tessenow Foundation in 2001; the Pritzker Award in 2011; the Wolf Prize of Arts in 2013; just to name a few. In 2001, in collaboration with OLI, Souto de Moura developed the SM15 for the new Pousada of Portugal in Covilhã.





INO-X 01




- Designed by Architect Romano Adolini;
- Dual flush;
- Mechanical actuation;
- Actuation force < 20 N;
- 2 mm thick;
- Tiltable button;
- Vandal resistant;
- Stainless steel material;
- 2 year warranty.




INO-X 02



INO-X 03



INO-X 06



CODE **DESCRIPTION**

660001 INO - X 01 Polished chrome

661001 INO - X 01 Brushed

660002 INO - X 02 Polished chrome

661002 INO - X 02 Brushed

660003 INO - X 03 Polished chrome

661003 INO - X 03 Brushed

660006 INO - X 06 Polished chrome

661006 INO - X 06 Brushed


Romano Adolini



The INO-X control plate collection was designed by Romano Adolini, an Italian architect and designer who is an influential figure in bathroom design.

The INO-X collection is simple, elegant and with a strong visual impact: "A simple sheet of steel that is only 2mm thick cut with a precise laser".

OCEANIA MIA

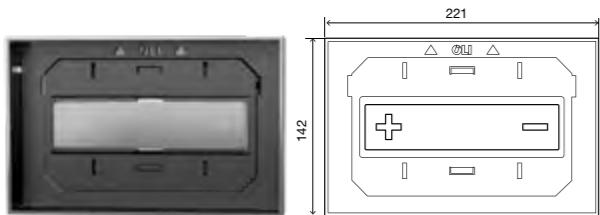

An infinite world of custom-made finishings

Customize your Oceania with your preferred finishing with any 10-mm-thick material.

The Oceania Mia control plate is provided with a high-resistance dual-adhesive glue for easy application of any front finishing of your choice.

For the finishing of your control plate to be perfect, this version is provided with a stainless steel frame and matt chrome push button.


Choose the finishing of your preference and treat yourself to a unique control plate.



Mechanical

CODE	DESCRIPTION
054563	OCEANIA MIA mech (customizable)

CODE	DESCRIPTION
054997	OCEANIA MIA pneu (customizable)

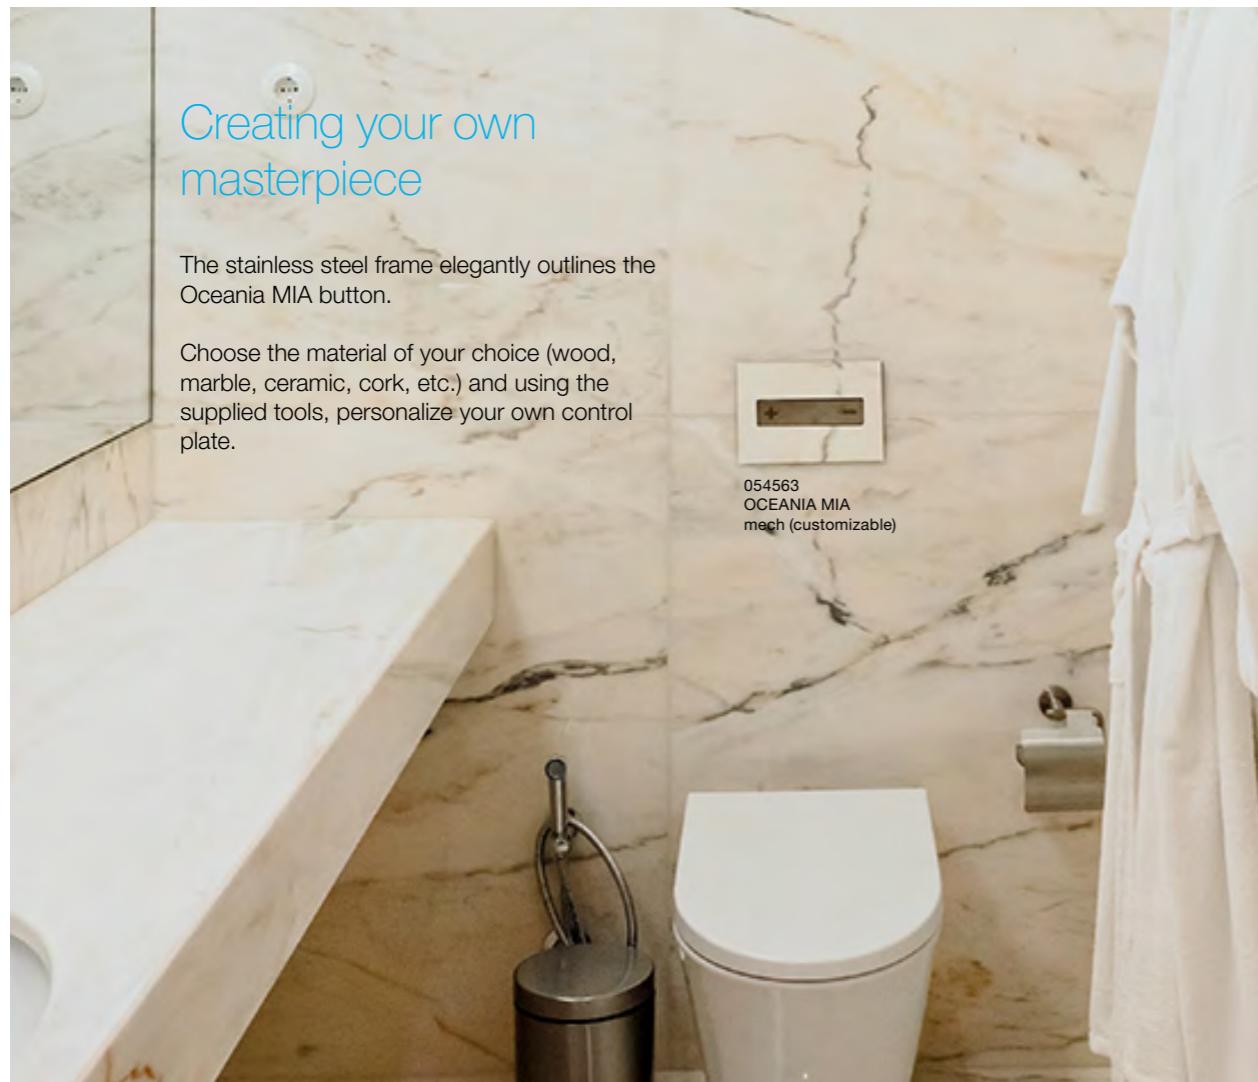

Creating your own masterpiece



The stainless steel frame elegantly outlines the Oceania MIA button.

Choose the material of your choice (wood, marble, ceramic, cork, etc.) and using the supplied tools, personalize your own control plate.




Pneumatic *

OCEANIA

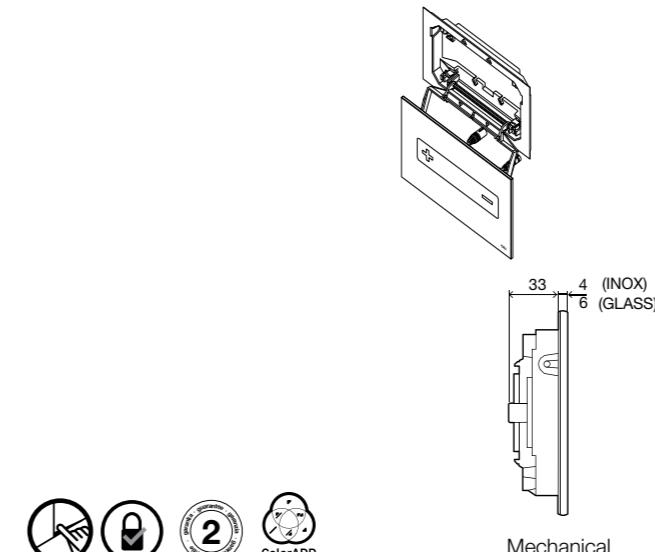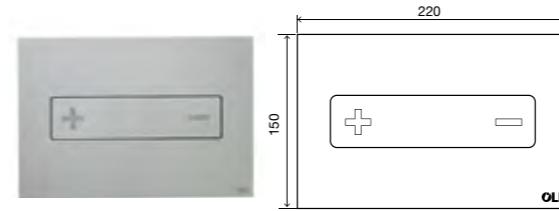

Mechanical



CODE	DESCRIPTION
054564	OCEANIA mech stainless steel - Brushed
054561	OCEANIA mech stainless steel - Polished chrome
054554	OCEANIA mech glass White
054557	OCEANIA mech glass Black
882412	OCEANIA Gold plated
054562	OCEANIA mech stainless steel button - glass Black
054558	OCEANIA mech stainless steel button - glass White

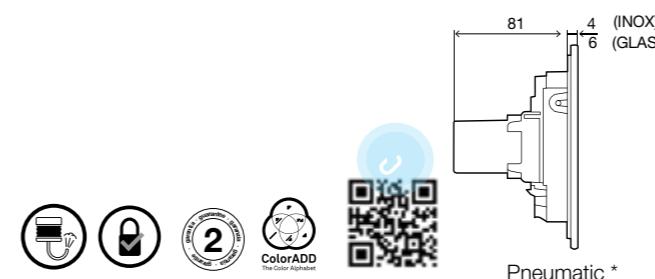


Pneumatic *

CODE	DESCRIPTION
054988	OCEANIA pneu stainless steel - Brushed
054998	OCEANIA pneu Stainless steel - Polished chrome
054989	OCEANIA pneu glass White
054992	OCEANIA pneu glass Black
054996	OCEANIA pneu stainless steel - glass Black
054993	OCEANIA pneu stainless steel - glass White

BLINK

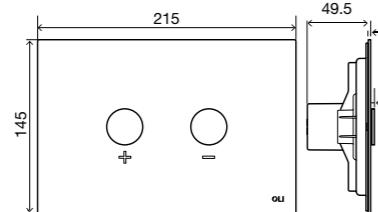

- Dual flush;
- Pneumatic actuation;
- Actuation force <20N;
- 2mm thick;
- Stainless steel material;
- 2 year warranty.




CODE	DESCRIPTION
154963	<input checked="" type="radio"/> BLINK Polished chrome
093399	<input checked="" type="radio"/> BLINK Brushed
216621	<input type="radio"/> BLINK White
878489	<input checked="" type="radio"/> BLINK Black
878781	<input checked="" type="radio"/> BLINK White gold
883245	<input checked="" type="radio"/> BLINK Gold plated
878782	<input checked="" type="radio"/> BLINK Bronze



Matching urinal control plate also available.
(see page 140 for more information)

KARISMA

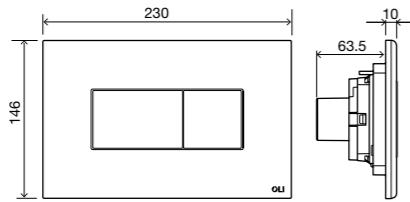


- Dual flush;
- Pneumatic actuation;
- Actuation force < 20 N;
- ABS control plate: high resistance to scratches;
- Soft-touch (ST) finishing available;
- 2 year warranty.



CODE	DESCRIPTION
641001	<input type="radio"/> KARISMA White
641004	<input checked="" type="radio"/> KARISMA Polished chrome
641006	<input checked="" type="radio"/> KARISMA Matt chrome
641015	<input checked="" type="radio"/> KARISMA Black soft-touch

SALINA

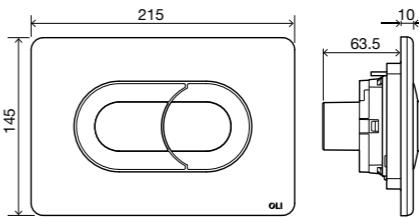


CODE	DESCRIPTION
640081	<input type="radio"/> SALINA White
640084	<input checked="" type="radio"/> SALINA Polished chrome
640086	<input checked="" type="radio"/> SALINA Matt chrome
640097	<input checked="" type="radio"/> SALINA Black soft-touch - Polished chrome button

- Dual flush;
- Pneumatic actuation;
- Actuation force < 20 N;
- ABS control plate: high resistance to scratches;
- Soft-touch (ST) finishing available and possible finishing combinations;
- 2 year warranty.

EASY DUAL




Easy Dual promotes hygiene and is ideal for people with reduced mobility. The protruding buttons are easy to push and the full flush or the half flush can be easily activated with the touch of an elbow, for example.

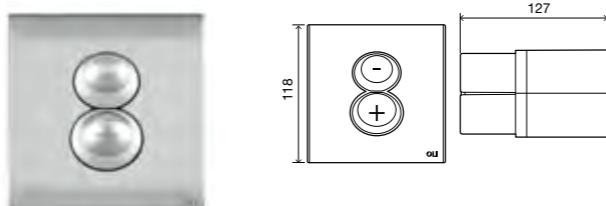

CODE	DESCRIPTION
011642	<input checked="" type="radio"/> EASY DUAL Chrome
011640	<input type="radio"/> EASY DUAL White



- Dual flush;
- Pneumatic actuation;
- Compatible with all pneumatic in-wall cisterns;
- ABS control plate;
- Vandal resistant;
- Adjustable buttons: 0mm, 18mm or 32mm
- 2 year warranty.

Not meant to be used in the opening of the in-wall cistern. An inspection plate (see page 133) should be applied to ensure access to the cistern.
Pre-installation necessary.




COMPLIANT WITH SAFETY REGULATIONS AGAINST FIRE AND PANIC HAZARDS IN PUBLIC BUILDINGS (ERP) - ARTICLE CO 31

TREND

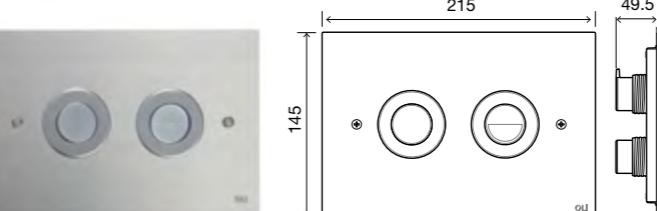

CODE	DESCRIPTION
656504	<input checked="" type="radio"/> TREND Polished chrome
656506	<input checked="" type="radio"/> TREND Matt chrome

- Dual flush;
- Pneumatic actuation;
- Actuation force < 20 N;
- 2mm thick;
- Vandal resistant;
- Stainless steel material;
- 2 year warranty.

MINI TREND *

- Dual flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall cisterns;
- For dry wall installations only;
- Vandal resistant;
- Polished chrome stainless steel material;
- 2 year warranty.

Included


- Pneumatic flexible hose L.2500 mm;
- Corrugated pipe L.2500 mm.



CODE DESCRIPTION

605294 MINI TREND**SPHERA ***

Complete flush - Sphera +




Half flush - Sphera -

- Single flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall and exposed cisterns;
- For drywall installations only;
- Polished chrome ABS material;
- 2 year warranty.



CODE DESCRIPTION

605264 Pneumatic Actuators SPHERA +605274 Pneumatic Actuators SPHERA -**MONO TREND ***


- Single flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall and exposed cisterns;
- For dry wall installations only;
- Vandal resistant;
- Polished chrome Stainless steel material;
- 2 year warranty.

Included

- Pneumatic flexible hose L.2500 mm;
- Corrugated pipe L.2500 mm.



CODE DESCRIPTION

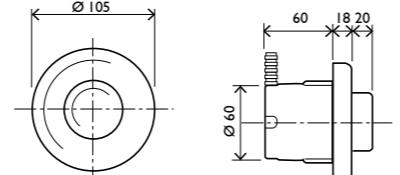605254 MONO TREND**PNEUMATIC ACTUATOR ***


- Single flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall and exposed cisterns;
- White ABS material;
- 2 year warranty.

Included

- Fixing material;
- Pneumatic flexible hose L. 2500 mm;
- Protection pipe L. 2500 mm;
- In-wall box



CODE DESCRIPTION

718063 In-wall Pneumatic actuator hand operated White**PNEUMATIC ACTUATOR ***


- Single flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall and exposed cisterns;
- ABS material;
- 2 year warranty.

Included

- Fixing material;
- Pneumatic flexible hose L. 2500 mm;
- Protection pipe L. 2500 mm;
- In-wall box.



CODE DESCRIPTION

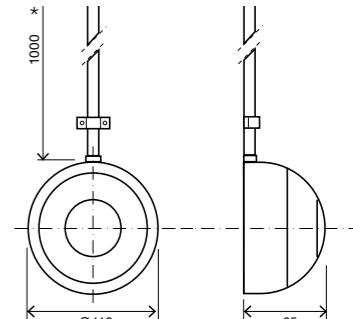605001 In-wall Pneumatic actuator hand operated White605004 In-wall Pneumatic actuator hand operated Polished chrome**PNEUMATIC ACTUATOR**


- Single flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall and exposed cisterns;
- ABS material;
- 2 year warranty.

Included

- Fixing material;
- Pneumatic flexible hose L. 2500 mm;
- Aesthetic covering pipe L. 1000 mm.



CODE DESCRIPTION

605101 Pneumatic actuator hand operated White605104 Pneumatic actuators hand operated Polished chrome**FOOT CONTROL FLOOR ***


- Single flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall and exposed cisterns;
- Floor installation;
- Anti-sliding push button;
- Vandal resistant;
- Stainless steel material;
- 2 year warranty.

Included

- Fixing material;
- Pneumatic flexible hose L. 2500 mm;
- Protection pipe L. 2500 mm.



CODE DESCRIPTION

605201 Pneumatic actuator foot operated floor mounted**FOOT CONTROL WALL ***

- Single flush;
- Pneumatic actuation;
- Compatible with all OLI pneumatic in-wall and exposed cisterns;
- Wall installation;
- Anti-sliding push button;
- Vandal resistant;
- Stainless steel material;
- 2 year warranty.

Included

- Fixing material;
- Pneumatic flexible hose L. 2500 mm;
- Protection pipe L. 2500 mm.



CODE DESCRIPTION


605301 Pneumatic actuator foot operated wall mounted

* Not meant to be used in the opening of the in-wall cistern. An inspection plate (see page 135) should be applied to ensure access to the cistern. Pre-installation necessary.

* Not meant to be used in the opening of the in-wall cistern. An inspection plate (see page 135) should be applied to ensure access to the cistern. Pre-installation necessary.



SEAMLESS




- Inspection plate;
- Compatible with all pneumatic in-wall systems – OLI74 PLUS, OLI120 PLUS, EXPERT PLUS, QUADRA PLUS;
- Customize with your preferred finishing;
- 0.5mm thick;
- Stainless steel material;
- Vandal resistant;
- 2 year warranty.



CODE DESCRIPTION

880390 Inspection plate SEAMLESS

INSPECTION PLATE



- Inspection plate;
- Compatible with all pneumatic in-wall systems – OLI74 PLUS, OLI120 PLUS, EXPERT PLUS, QUADRA PLUS;
- Vandal resistant;
- Stainless steel material;
- 2 year warranty.




CODE DESCRIPTION

207892 Inspection plate Chrome

207893 Inspection plate Brushed

GLOBE

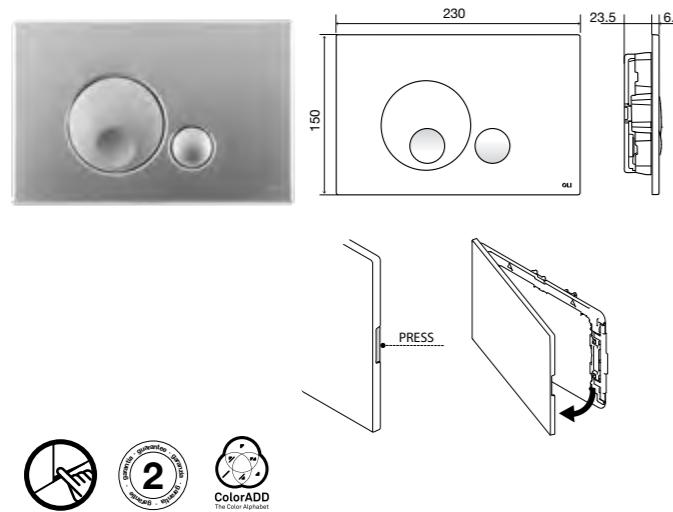

CODE	DESCRIPTION
152949	○ □ GLOBE White
152950	● □ GLOBE Polished chrome
152951	● □ GLOBE Matt chrome
152952	● ■ GLOBE Black soft-touch
152953	● ■ GLOBE Grey soft-touch
152954	● ■ GLOBE Gold plated


- Dual flush mechanical actuation;
- Actuation force < 20 N;
- 6.5mm thick;
- Opening and closing with "click" system;
- ABS control plate: high resistance to scratches;
- Soft-touch (ST) finishing available;
- 2 year warranty.



Matching urinal control plate also available.
(see page 143 for more information)



SLIM

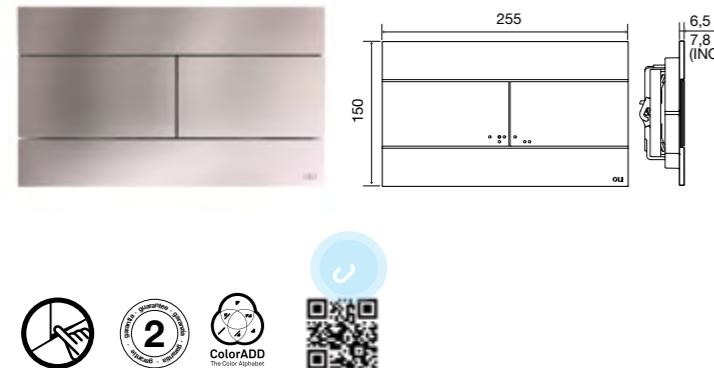


CODE	DESCRIPTION
659041	○ □ SLIM White
659044	● □ SLIM Polished chrome
659046	● □ SLIM Matt chrome
659055	● ■ SLIM Black soft-touch
010216	● ■ SLIM Grey soft-touch
154962	● ■ SLIM Gold plated
057141	● ■ SLIM Inox

SLIM INOX

- ABS control plate with brushed Stainless steel cover;
- Higher resistance to scratches;
- 7.8 mm thick.




GLAM

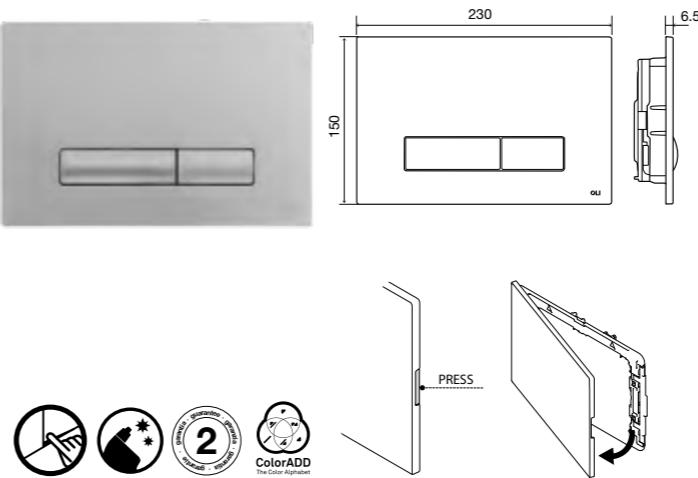


CODE	DESCRIPTION
139178	○ □ GLAM White OLIpure
139179	● □ GLAM Polished chrome OLIpure
139180	● □ GLAM Matt chrome OLIpure
139181	● ■ GLAM Black soft-touch OLIpure
139184	○ □ GLAM White
139185	● □ GLAM Polished chrome
139186	● □ GLAM Matt chrome
139187	● ■ GLAM Black soft-touch

- Dual flush;
- OLIpure compatible version;
- Mechanical actuation;
- Actuation force < 20 N;
- 6.5mm thick;
- Opening and closing with "click" system;
- ABS control plate: high resistance to scratches;
- Soft-touch (ST) finishing available;
- 2 year warranty.

OLIpure®

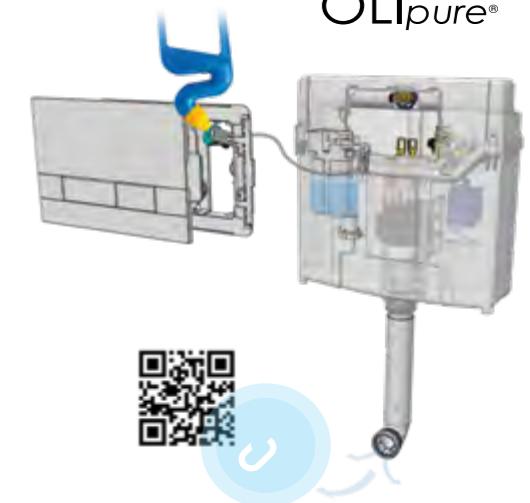


NARROW

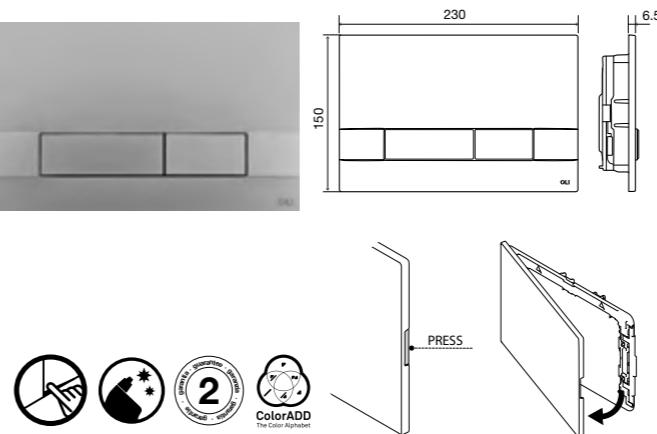


CODE	DESCRIPTION
148300	○ □ NARROW White OLIpure
148301	● □ NARROW Polished chrome OLIpure
148302	● □ NARROW Matt chrome OLIpure
148303	● ■ NARROW Black soft-touch OLIpure
152939	○ □ NARROW White
152940	● □ NARROW Polished chrome
152941	● □ NARROW Matt chrome
152942	● ■ NARROW Black Soft-Touch

- Dual flush;
- OLIpure version available;
- Mechanical actuation;
- Actuation force < 20 N;
- 6.5mm thick;
- Opening and closing with "click" system;
- ABS control plate: high resistance to scratches;
- Soft-touch (ST) finishing available;
- 2 year warranty.

PLAIN

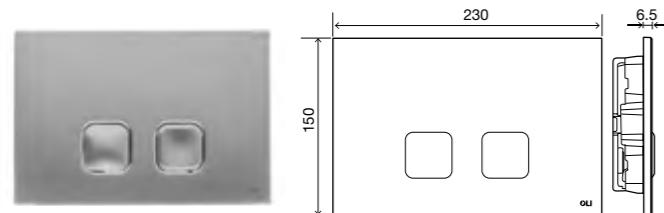


- Dual flush;
- Mechanical actuation;
- Actuation force < 20 N;
- 6.5mm thick;
- Opening and closing with "click" system;
- ABS control plate: high resistance to scratches;
- Soft-touch (ST) finishing available;
- 2 year warranty.

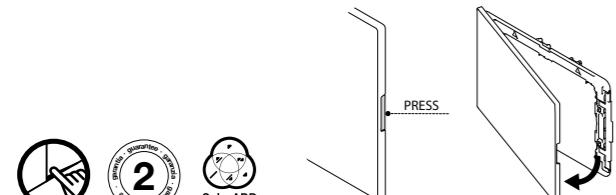

CODE DESCRIPTION

070826 PLAIN White070827 PLAIN Polished chrome070828 PLAIN Matt chrome070829 PLAIN Black soft-touch

iPLATE

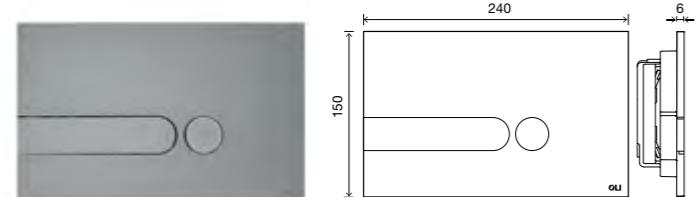

- Dual flush;
- Mechanical actuation;
- Actuation force < 20 N;
- 6 mm thick;
- Wide range of colours and combinations;
- Possibility of replacing the control buttons with kit elegance and kit fantasy;
- ABS control plate: high resistance to scratches;
- Soft-touch (ST) finishing available;
- 2 year warranty.



Kit Elegance



Kit Fantasy




CODE DESCRIPTION

670001 iPLATE White670004 iPLATE Polished chrome670005 iPLATE Black soft-touch670006 iPLATE Matt chrome


670051 Kit fantasy iPLATE

670052 Kit elegance iPLATE

RIA / RIA STOP

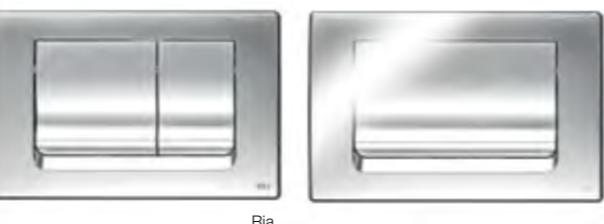


CODE DESCRIPTION

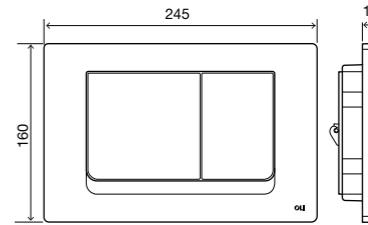640581 RIA White640584 RIA Polished chrome640586 RIA Matt chrome640591 RIA White bacterial proof010244 RIA stop Polished chrome010234 RIA stop White

- Dual flush or single flush;
- Mechanical actuation;
- Actuation force < 20 N;
- ABS control plate: high resistance to scratches;
- Anti-bacterial finishing available;
- 2 year warranty.

RIVER

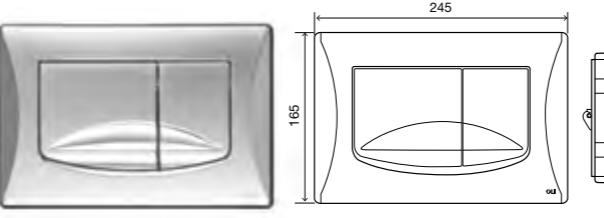


CODE DESCRIPTION

638501 RIVER White638504 RIVER Polished chrome638506 RIVER Matt chrome638508 RIVER Gold plated

- Dual flush;
- Mechanical actuation;
- Actuation force < 20 N;
- ABS control plate: high resistance to scratches;
- 2 year warranty.

METAL

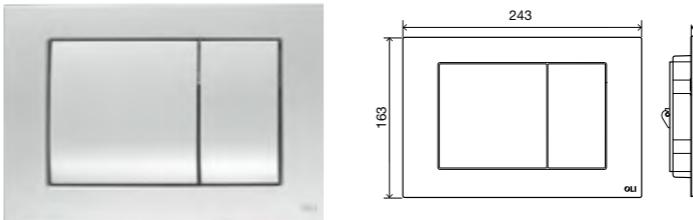


CODE DESCRIPTION

656004 METAL Polished chrome656006 METAL Matt chrome

- Dual flush;
- Mechanical actuation;
- Actuation force < 20 N;
- Vandal resistant;
- Zamac material;
- 2 year warranty.



ELECTRA III

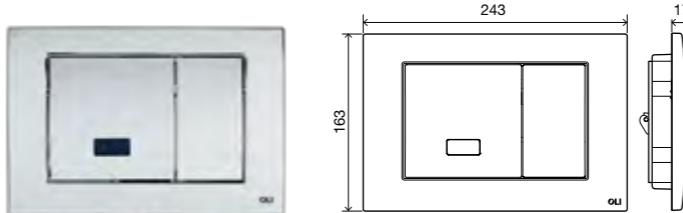

CODE DESCRIPTION


079206 ELECTRA III Polished chrome zamac

- Dual flush (<60s half flush; >60s full flush);
- Infrared sensor or mechanical actuation;
- Compatible with OLI120 PLUS and OLI74 PLUS electronic version;
- Electric power connection with pre-installation needed (adapter 230V/12V not included);
- Vandal resistant;
- Polished chrome Zamac material;
- 2 year warranty.

Matching urinal control plate also available.
(see page 143 for more information)



ELECTRA II

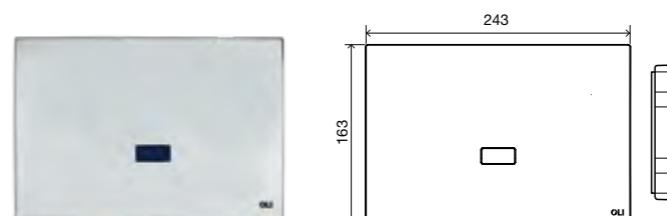

CODE DESCRIPTION


079205 ELECTRA II Polished chrome zamac

- Dual flush (<60s half flush; >60s full flush);
- Infrared sensor actuation;
- Compatible with OLI120 PLUS and OLI74 PLUS electronic version;
- Electric power connection with pre-installation needed (adapter 230V/12V not included);
- Vandal resistant;
- Polished chrome Zamac material;
- 2 year warranty.

Matching urinal control plate also available.
(see page 143 for more information)




ELECTRA I

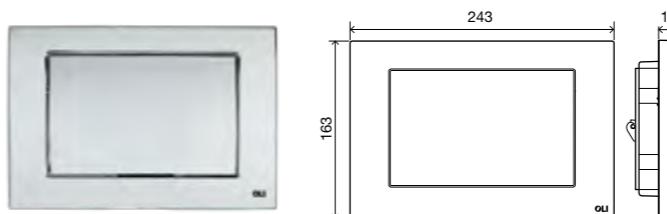

CODE DESCRIPTION

079207 ELECTRA I Polished chrome zamac

- Single flush;
- Actuation by switch (not included) or mechanical;
- Compatible with OLI120 PLUS and OLI74 PLUS electronic version;
- Electric power connection with pre-installation needed (adapter 230V/12V not included);
- Connecting cable to the switch (4m) included;
- Vandal resistant;
- Polished chrome Zamac material;
- 2 year warranty.

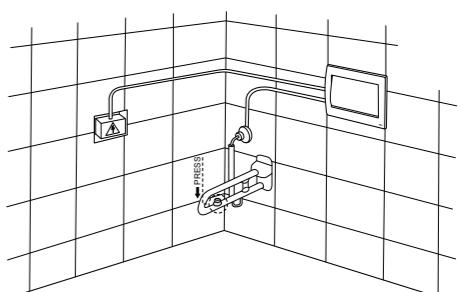

NOTE: See compatible control plates on page 116.

measurements are in mm 139



BLINK URINAL



BLINK URINAL

NEW

OLI

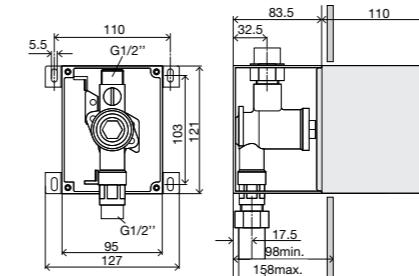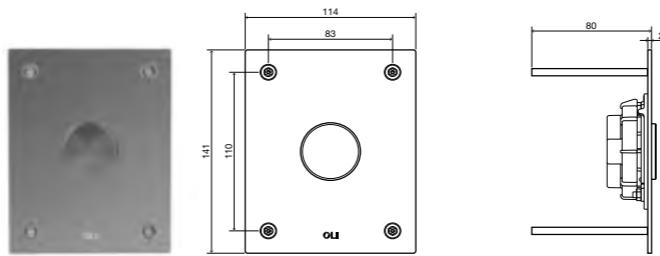


Urinal concealed pre-installation

- Single flush;
- Mechanically actuated urinal plate for flush valve;
- Stainless steel control plate;
- Vandal-resistant;
- TORX security screws (+bit);
- The flush valve has to be installed before closing the wall;
- Compatible with ECO URINAL FRAME, URINAL Sanitarblock and DOUBLE FRAME WC/URINAL/WASHBASIN;
- 2 years warranty.

Urinal concealed pre installation

- Protection cover;
- Pre-assembled water path with isolating valve;
- Sealing plug;
- Adjustable flow;
- Flow pressure: 0.8 – 5 bar;
- Flush volume: 0.3 l/s;
- G ½" water connection.

Matching BLINK control plate
also available.
(see page 128 for more
information)




CODE DESCRIPTION

882264 ⚡ BLINK URINAL Polished chrome NEW


883087 Urinal concealed pre-installation

NOTE: See compatible control plates on page 116.

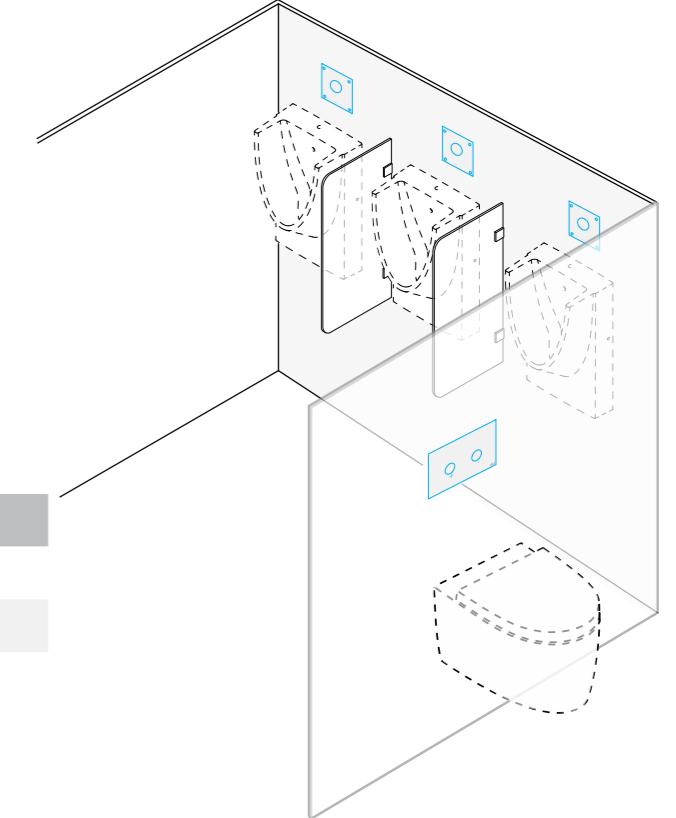


measurements are in mm 141

SM15 URINAL

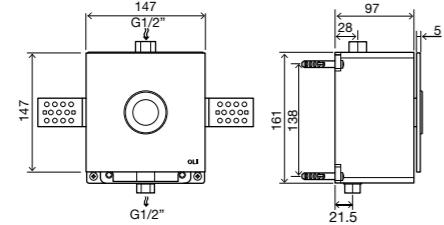

CODE	DESCRIPTION
034265	<input type="radio"/> <input checked="" type="checkbox"/> SM15 URINAL White tempered glass

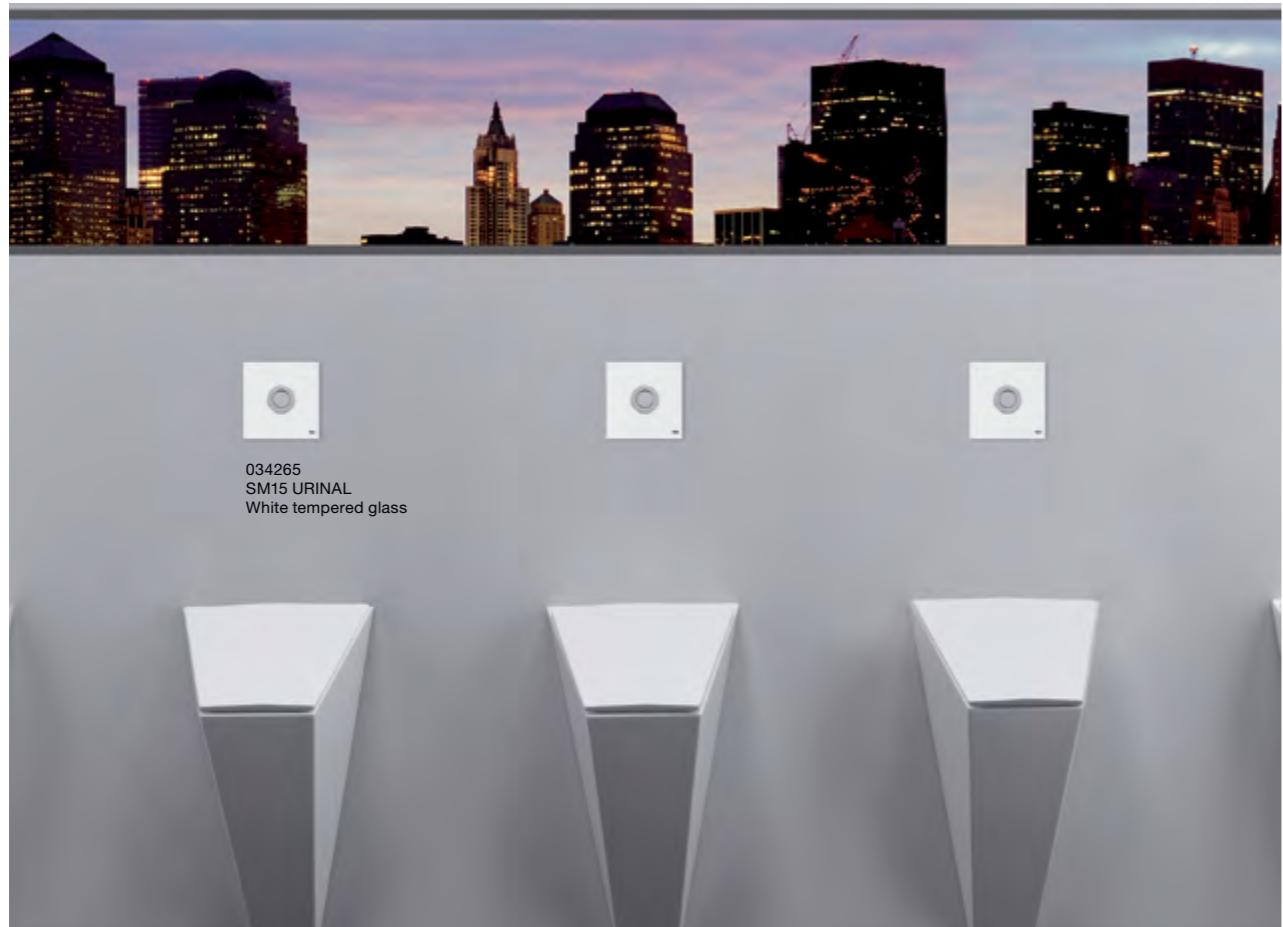


- Single flush;
- Mechanically actuated urinal plate for flush valve;
- Adjustable flush time;
- Adjustable flow;
- Operating pressure ≥ 3 bar;
- G 1/2" water connections;
- 5mm thick;
- White tempered glass material;
- Compatible with ECO URINAL FRAME, URINAL Sanitarblock and DOUBLE FRAME WC/URINAL/WASHBASIN;
- The flush valve has to be installed before closing the wall;
- Urinal concealed pre-installation included;
- 2 year warranty.

Matching SM15 control plate also available.
(see page 124 for more information)



eAQUA URINAL

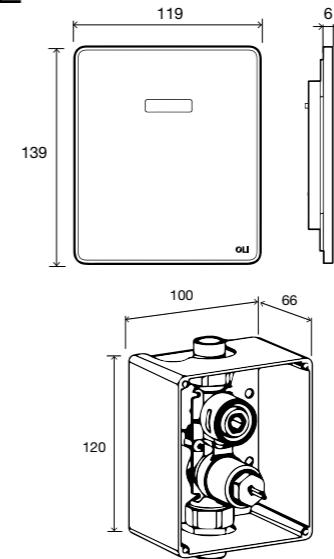

Urinal concealed pre-installation




CODE	DESCRIPTION
879120	<input type="radio"/> <input checked="" type="checkbox"/> eAQUA URINAL Inox AC
879119	<input type="radio"/> <input checked="" type="checkbox"/> eAQUA URINAL Inox BATT
879123	Urinal concealed pre installation

- Brushed stainless-steel front plate;
- Double infrared sensors (with automatic setting feature);
- Dynamic sensor: constantly adjusts the optimum range;
- Temporary-off (cleaning) and short-on (manual flush) activated with touch;
- Flush time and sensor sensitivity adjustable with touch;
- 24- or 48-hour hygienic flush and pre-flush activate with touch;
- Compatible with ECO URINAL FRAME, URINAL Sanitarblock and DOUBLE FRAME WC/URINAL/WASHBASIN;
- The flush valve has to be installed before closing the wall;
- Vandal resistant;
- 2 year warranty.



Urinal concealed pre installation

- Operating pressure: 0.3 - 10 bar;
- Flow rate: ca. 20 l/min. (3 bar);
- 6V Lithium CRP 2 (standard: life time up to 4 years) / mains power supply 230V/6V;
- Standards: DIN EN 200; CE.

Matching ELECTRA control plate also available.
(see page 139 for more information)



GLOBE URINAL



Urinal concealed pre-installation



CODE	DESCRIPTION
878466	<input type="radio"/> <input checked="" type="checkbox"/> GLOBE URINAL White
878818	<input type="radio"/> <input checked="" type="checkbox"/> GLOBE URINAL Polished chrome
878819	<input type="radio"/> <input checked="" type="checkbox"/> GLOBE URINAL Matt chrome
878822	<input checked="" type="radio"/> <input type="checkbox"/> GLOBE URINAL Gold plated
883087	Urinal concealed pre-installation

- Single flush;
- Mechanically actuated urinal plate for flush valve;
- Multiple colours available;
- ABS control plate: high resistance to scratches;
- Vandal resistance;
- Compatible with ECO URINAL FRAME, URINAL Sanitarblock and DOUBLE FRAME WC/URINAL/WASHBASIN;
- The flush valve has to be installed before closing the wall;
- 2 year warranty.

Urinal concealed pre installation

- Protection cover;
- Pre-assembled water path with isolating valve;
- Sealing plug;
- Adjustable flow;
- Flow pressure: 0.8 - 5 bar;
- Flush volume: 0.3 l/s;
- G 1/2" water connection.

Matching GLOBE control plate also available.
(see page 134 for more information)





COMMERCIAL

The wide range of OLI control plates are characterized by their versatility and durability. Designed with cutting edge technology they are suitable for all bathrooms, whether they are public bathrooms or private bathrooms.

OLI has the perfect control plate for any situation. From infrared sensors that allow flushing without having to touch the control plate to models that are highly resistant for public bathrooms.



Vandal resistant

OLI control plates are ideal for commercial applications.



100% Hygienic

Equipped with an infrared sensor, Electra II and Electra III control plates flush without touching the control plate. 100% Hygienic.

CONTROL PLATE

RIA bacterial proof



(see more detail on page 137)

OCEANIA



(see more detail on page 126)

METAL



(see more detail on page 137)

INO-X



(see more detail on page 125)

URINAL CONTROL PLATE

GLOBE URINAL



(see more detail on page 143)

eAQUA URINAL



(see more detail on page 143)

SM15 URINAL



(see more detail on page 142)

BLINK URINAL



(see more detail on page 141)

TREND



(see more detail on page 128)

EASY DUAL



(see more detail on page 129)

SEAMLESS



(see more detail on page 133)

INSPECTION PLATE



(see more detail on page 133)

FRAMES

DOUBLE FRAME
WC | URINAL/
WASHBASIN

(see more detail on page 60)

OLI74 PLUS
FREE-STANDING
DOUBLE

(see more detail on page 72)

WC FRAME FOR
FLUSH VALVE

(see more detail on page 93)

URINAL



(see more detail on page 99)

ECO URINAL



(see more detail on page 99)

EASY



(see more detail on page 100)

URINAL DIVIDER



(see more detail on page 100)

ELECTRA III




(see more detail on page 139)

ELECTRA II




(see more detail on page 139)

ELECTRA I



(see more detail on page 139)

KIT DUPLEX

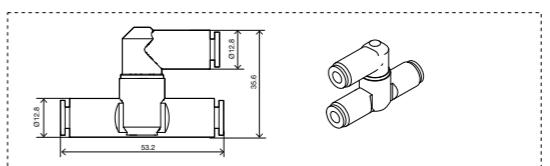

MINI TREND



(see more detail on page 130)

MONO TREND



(see more detail on page 130)

SPHERA




(see more detail on page 130)

FOOT CONTROL



(see more detail on page 131)

(see more detail on page 111)

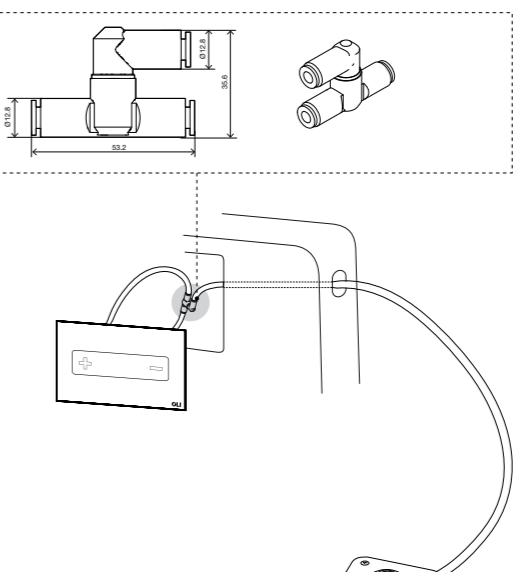

measurements are in mm 147

EXPOSED FLUSH CISTERNS



QUARZO

[Page 152](#)



TOPAZIO DD

[Page 153](#)



ONIX PLUS

[Page 153](#)



ZAFFIRO DD

[Page 154](#)



TURCHESE

[Page 154](#)



OLISTYLE

[Page 155](#)



TOPAZIO

[Page 155](#)



MAIN FEATURES



QUARZO



ONIX PLUS



TOPAZIO DD



TOPAZIO



ZAFFIRO



TURCHESE



OLISTYLE



Dual Flush



Start/Stop



Single Flush



Medium-low position



Without flush pipe



Close coupled position



High position



Pneumatic version



Without flush pipe



Silent inlet valve



Anti-condensation lining




kiwa



QUARZO

Medium-low Position

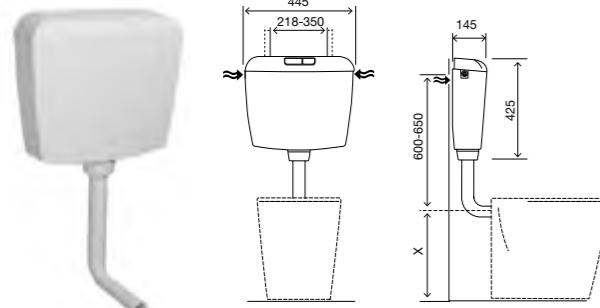

- Dual flush 6/3 litres (adjustable to 9/4 litres in the outlet valve);
- Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- 145mm thick;
- Adjustable wall fixation system;
- Water supply connections - Three positions*;
- Some versions compliant with: EN 14055 CE marking;
- Class "A" for the Water Efficiency in compliance with the ANQIP Authority requirements;
- White PS material;
- 5 year warranty.



CODE DESCRIPTION

124427 QUARZO

880599 QUARZO OLIpure

Included


- Flush pipe Ø50/40;
- Wall fixation accessories;
- WC pan connection rubber seal.

OLIpure the right solution for perfect hygiene in the bathroom.

Internal system that pumps cleaning liquid in each flush. This way the cleaning liquid is always in a closed circuit, unlike traditional cleaning tablets that are always in contact with water, causing possible damages to components in the cistern.




- - Easy, fast and simple refilling of the cleaning liquid, through a small opening on the side of the cistern.
- - Universal - Compatible with every WC liquid ** cleaning product;
- Long lasting, 450ml maximum capacity.

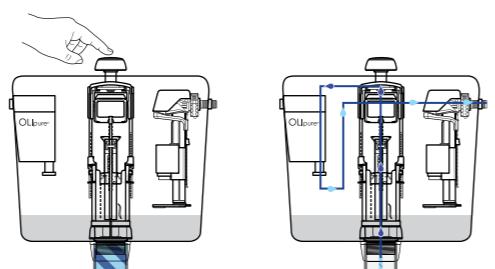

TOPAZIO DD

Medium-low Position

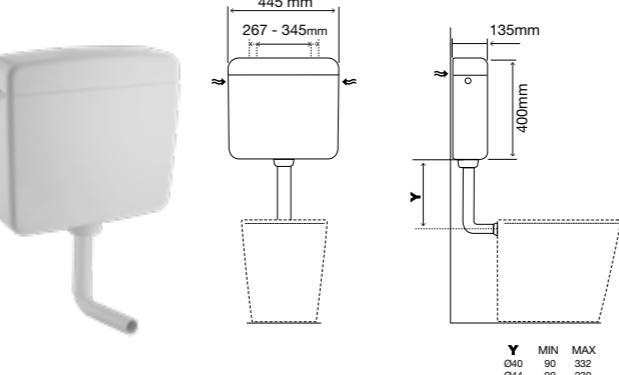

NOTE: Different colours available upon request.



CODE DESCRIPTION

416201 TOPAZIO DD with 1/2" stop valve

416501 TOPAZIO DD

- Dual flush 6/3 litres (adjustable to 9/4 litres in the outlet valve);
- Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- 135mm thick;
- Adjustable wall fixation system;
- Water supply connections - Three positions*;
- Some versions compliant with: KIWA:
- EN 14055 CE marking;
- Class "A" for Water Efficiency in compliance with the ANQIP Authority requirements;
- White PS material;
- 5 year warranty.

Included


- Flush pipe Ø50/40;
- Wall fixation accessories;
- WC pan connection rubber seal.

ONIX PLUS

Medium-low application or close coupled application




The cistern application allows an easy adjustment for all WC pan fixation holes.

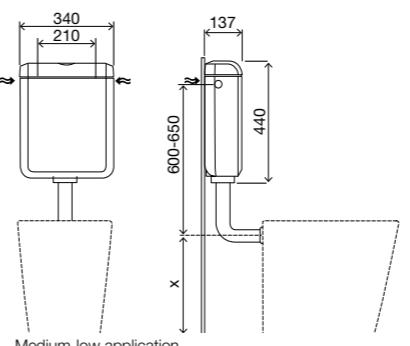

- Dual flush 6/3 litres (adjustable to 4/2 litres in the outlet valve);
- Medium/low level installation or close couple;
- Acoustic and anti-condensation internal lining;
- Delayed refilling - AZOR PLUS inlet valve;
- Silent inlet valve;
- 137mm thick;
- Water supply connections - Three positions*;
- Some versions compliant with: KIWA;
- EN 14055 CE marking;
- Class "A" for Water Efficiency in compliance with the ANQIP Authority requirements;
- White PS material;
- 5 year warranty.

Included

- Close-coupled fixation kit for close couple installation;
- Flush pipe Ø50/40 for medium-low level installation;
- Wall fixation accessories;
- WC pan connection rubber seal.

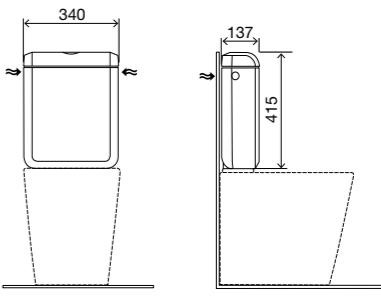

CODE DESCRIPTION



340221 ONIX PLUS 2 in 1

* If the water connection is in the back position, a bended connection pipe or flexible hose is needed.

**The use of chlorine-free liquid detergents with a viscosity between 150 and 300 cp (at 20 ° C) is recommended.

ZAFFIRO DD

Close-coupled

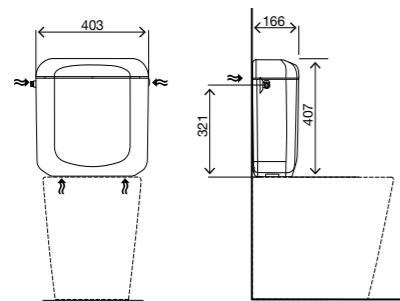

The cistern application allows an easy adjustment for all WC pan fixation holes.

- Dual flush 6/3 litres (adjustable to 9/4 litres in the outlet valve);
- Close couple installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- 166mm thick;
- Water supply connections - Three positions;*
- Some versions compliant with: KIWA;
- EN 14055 CE marking;
- Class "A" for Water Efficiency in compliance with the ANQIP Authority requirements;
- White PS material;
- 5 year warranty.

Included

- Close-couple fixation kit.




NOTE: Different colours available upon request.

CODE	DESCRIPTION
425201	ZAFFIRO DD with ½" stop valve
425501	ZAFFIRO DD
002426	ZAFFIRO DD bottom connection

TURCHESE

high position

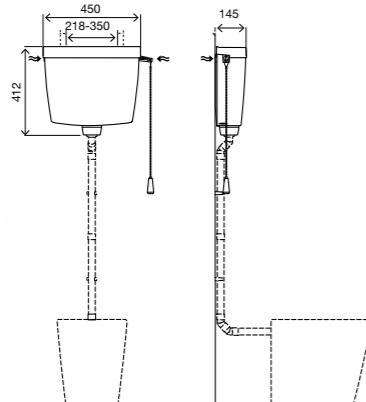

- High level exposed tank with single flush 6 litres (adjustable to 9 litres in the inlet valve);
- Actuation in the push button or pulling a chain;
- High/Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- 145mm thick;
- Adjustable wall fixation system;
- Water supply connections - Three positions;*
- Compatible with Ø32 flush pipes;
- Pneumatic version available (push buttons page 146);
- EN 14055 CE marking;
- White PS material;
- 5 year warranty.

Included


- Chain for high level installation;
- Wall fixation accessories;
- WC pan connection rubber seal Ø32.



CODE	DESCRIPTION
440201	TURCHESE with ½" stop valve
440051	TURCHESE
440881	TURCHESE Pneumatic version

OLISTYLE

high position

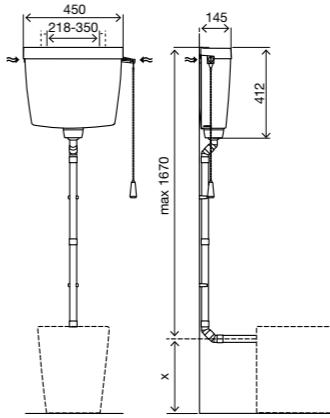

- High level exposed tank with single flush 9 litres (adjustable to 6 litres in the inlet valve);
- Actuation in the push button or pulling a chain;
- High/Medium/low level installation;
- 145mm thick;
- Adjustable wall fixation system;
- Water supply connections - Three positions;*
- EN 14055 CE marking;
- White PS material;
- 5 year warranty.

Included


- Chain for high level installation;
- 4 modular flush pipes Ø32;
- Wall fixation accessories;
- WC pan connection rubber seal Ø32.



CODE	DESCRIPTION
440141	OLISTYLE

TOPAZIO

high position

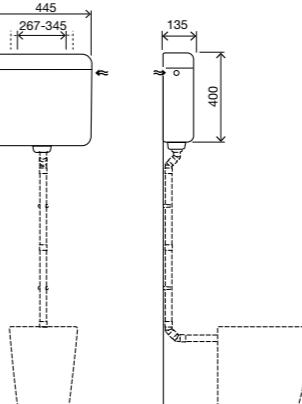

- High level exposed tank with single flush 9 litres (adjustable to 6 litres in the inlet valve);
- Actuation in the Lid push button or pneumatic button (pneumatic push buttons page 146);
- High/Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- 135mm thick;
- Adjustable wall fixation system;
- Water supply connections - Three positions;*
- EN 14055 CE marking;
- White PS material;
- 5 year warranty.

Included


- Wall fixation accessories.



CODE	DESCRIPTION
413781	TOPAZIO Pneu high with ½" stop valve


ACCESSORIES

FLUSH PIPE
Ø50/32 15°

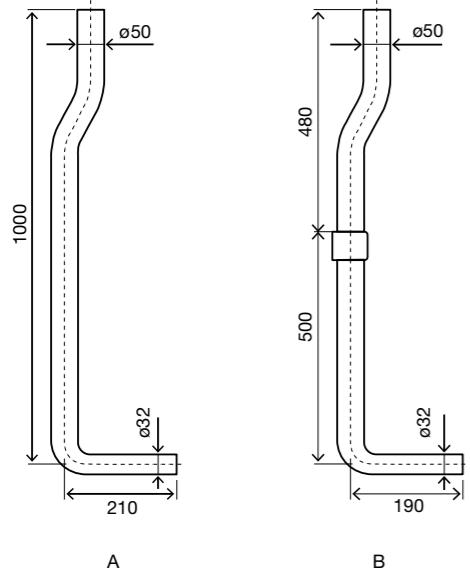


CODE	DESCRIPTION
490601	A - Flush pipe for medium/high cisterns - White
490501	B - Flush pipe for medium/high cisterns - White

FLUSH PIPE
Ø32

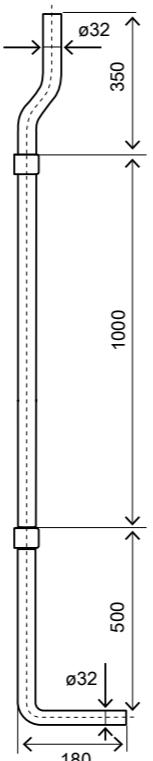

CODE	DESCRIPTION
490701	Modular flush pipe for high cisterns - White

MODULAR FLUSH PIPE




Included

- 5 flush pipes Ø32;
- 3 flush pipe bends Ø32;
- Flush pipe bend connection Ø32/50;
- Flush pipe support with fixation screw.


CODE	DESCRIPTION
490881	Modular flush pipes for high/medium/low level cisterns - White

FLUSH BEND FOR
HIGH POSITION CISTERNS




CODE	DESCRIPTION
490751	Flush bend - White

FLUSH PIPE
Medium/high

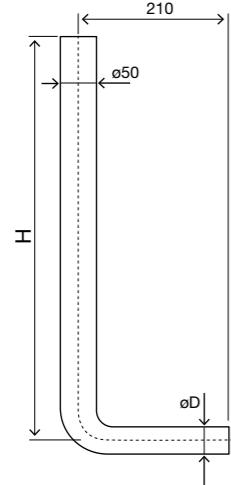


CODE	DESCRIPTION
490301	FLUSH PIPE H - 600, D - Ø32 - White
490318	FLUSH PIPE H - 600, D - Ø40 - White
490401	FLUSH PIPE H - 1000, D - Ø32 - White

FLUSH PIPE
Medium/low




CODE	DESCRIPTION
490001	FLUSH PIPE L - 210, D - Ø32 - White
490101	FLUSH PIPE L - 210, D - Ø40 - White
490130	FLUSH PIPE L - 350, D - Ø40 - White

TOPAZIO PNEUMATIC KIT

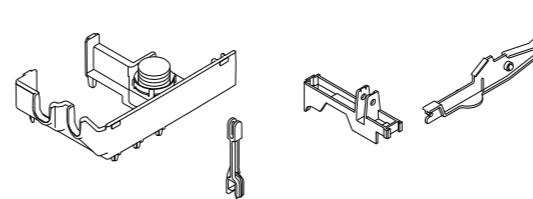

CODE	DESCRIPTION
087617	TOPAZIO Pneumatic kit

ADJUSTABLE FLOW REDUCER
FOR EXPOSED CISTERNS

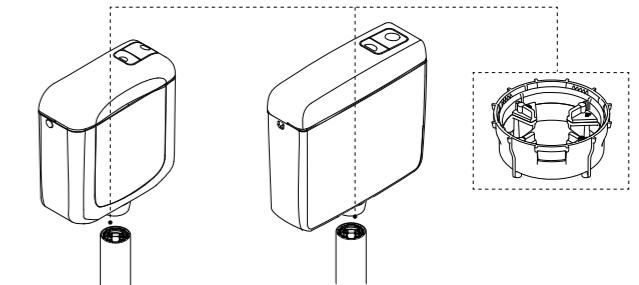

CODE	DESCRIPTION
883088	Adjustable flow reducer for exposed cisterns

- Available for TOPAZIO and ZAFFIRO cisterns.

UNIVERSAL MECHANISMS



Universal inlet and outlet valves for ceramic cisterns

Easy and quick installation

OLI is a leading European producer of mechanisms for ceramic cisterns and its quality is recognized by the most important international bodies. The extremely silent inlet valves and the elevated performance levels of our outlet valves are tested under strict laboratory conditions before being introduced to the market.

INLET VALVES



AG 104 PLUS
AZOR PLUS
IVC102 PLUS
IVC100 PLUS
AZOR SILENT
COMPACT
JOLLY UNI
UNI BOTTOM


[Page 162](#)

OUTLET VALVES



APOLO
BETA
ATLAS CABLE
ATLAS
FAST START/STOP
PUSH ECO
ECO TIRETTE
HANDLE

[Page 167](#)




KITS

PUSH ECO + ECO
PUSH ECO + UNI BOTTOM
FAST START/STOP + COMPACT
FAST START/STOP + UNI BOTTOM
IVC100 + ATLAS CABLE
OLIPURE

[Page 173](#)

MAIN FEATURES

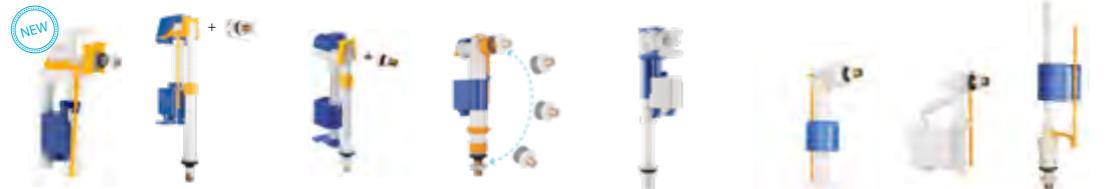

AG104 PLUS

AZOR PLUS

AZOR SILENT

IVC100 PLUS

IVC102PLUS

COMPACT

JOLLY UNI

UNI BOTTOM



APOLLO

BETA

ATLAS CABLE



ATLAS

FAST START/STOP


PUSH ECO

ECO TIROTTA

HANDLE

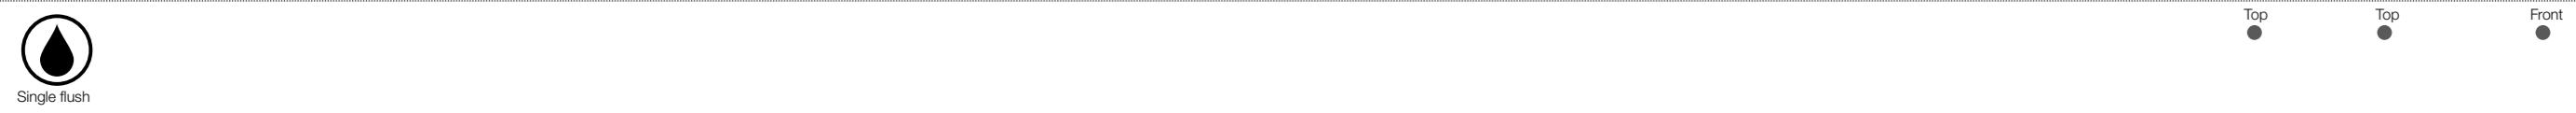

Dimensions	288(H) 108 x 58 (W x D)	258-360 107 x 56 (W x D)	255-360 107 x 56 (W x D)	240-340 98 x 60 (W x D)	194-278 87x52 (W x D)	255 110 x 65 (H) (W x D)	200-235 140 x 64 (H) (W x D)	335 95 x 72 (H) (W x D)	360-515 115 (H) (Ø)	310-500 92 (H) (Ø)	285-500 92 (H) (Ø)	310-425 92 (H) (Ø)	290-490 85 (H) (Ø)	334-444 85 (H) (Ø)	200-310 85 (H) (Ø)







CABLE VERSION

* Bottom version

** Side version

AG 104 PLUS

Inlet valve

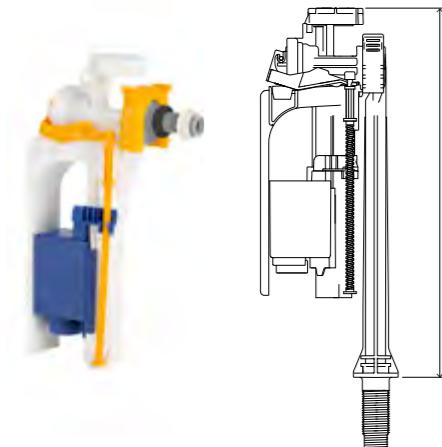

SAVES UP TO **9L**
OF WATER PER DAY



- New back flow protection to prevent contamination;
- Compliant with UK standards;
- Side or bottom water supply connection;
- ½" plastic connection;
- Delayed refilling inlet valve: it starts after the outlet valve is in the closed position;
- Easy maintenance without the need to disconnect from the water connection;
- Dynamic pressure functioning range: 0.1 – 10 bar;
- Maximum static pressure: 16 bar;
- 10 year warranty.

AZOR PLUS


Inlet valve





SAVES UP TO **9L**
OF WATER PER DAY

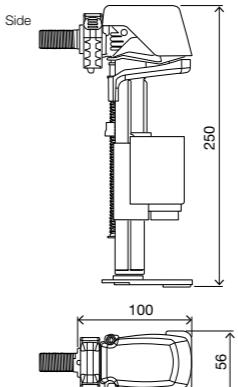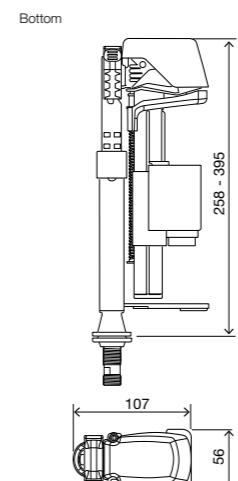

INLET VALVE IN
CLOSED POSITION



OPERATION MODE
DUAL FLUSH

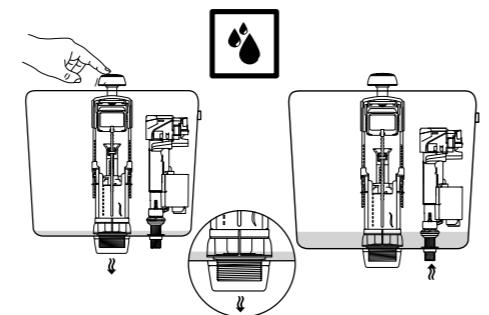

CODE DESCRIPTION

883099	AG 104 PLUS side 1/2 plastic - bag	
883103	AG 104 PLUS bottom 1/2 plastic - bag	

The AG104 PLUS inlet valve, with his delayed opening system, only opens the water after the flush valve closes. This system allows a water saving up to 0.5 liters in average in each full flush, resulting in a daily average saving of 9 liters.

CODE DESCRIPTION


564100	AZOR PLUS side ¾" brass - box
564102	AZOR PLUS bottom ¾" brass - box

The AZOR PLUS inlet valve, with his delayed opening system, only opens the water after the flush valve closes. This system allows a water saving up to 0.5 liters in average in each full flush, resulting in a daily average saving of 9 liters.

OLI

IVC102 PLUS

Inlet valve

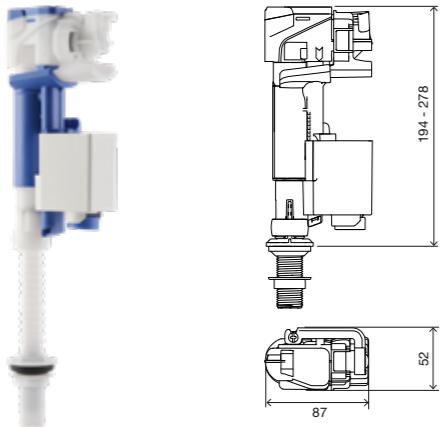

SAVES UP TO **9L**
OF WATER PER DAY

- Delayed refilling inlet valve: it starts after the outlet valve is in the close position;
- Bottom inlet valve with $\frac{1}{2}$ " brass (also available in plastic) or 15/16 in plastic connection;
- Height is adjustable;
- Easy to install;
- Easy maintenance;
- Silent inlet valve, class I;
- Integrated filter can be cleaned;
- Reduced dimensions;
- Counter pressure closing system (hydraulic);
- Dynamic pressure functioning range: 0.5-6bar;
- Maximum static pressure: 16bar;
- Anti-backflow function;
- Quick filling;
- 10 year warranty.



CODE DESCRIPTION

878736 IVC102 PLUS $\frac{1}{2}$ brass - box

878735 IVC102 PLUS 15/16 plastic - box

879284 IVC102 PLUS $\frac{1}{2}$ plastic - box

878738 IVC102 PLUS $\frac{1}{2}$ brass - bag


878737 IVC102 PLUS 15/16 plastic - bag

879285 IVC102 PLUS $\frac{1}{2}$ plastic - bag

The IVC102 PLUS inlet valve, with his delayed opening system, only opens the water after the flush valve closes. This system allows a water saving up to 0.5 liters in average in each full flush, resulting in a daily average saving of 9 liters.

IVC100 PLUS

Inlet valve

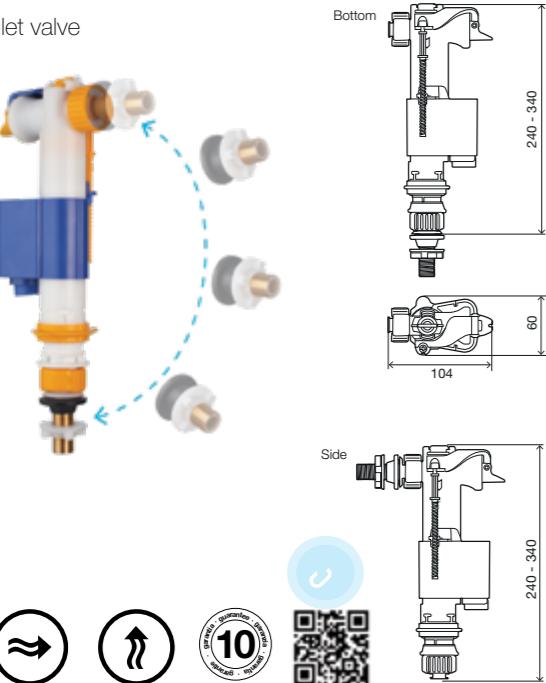

SAVES UP TO **9L**
OF WATER PER DAY

- Side and bottom water supply connection in the same inlet valve;
- Delayed refilling inlet valve: it starts after the outlet valve is in the close position;
- Reduced dimensions;
- Side and bottom inlet valve, with $\frac{3}{8}$ " brass;
- Adjustable height in the bottom connection;
- Easy to install;
- Counter pressure closing system (Hydraulic);
- Silent valve;
- Dynamic pressure functioning range: 0.1 – 10 bar;
- Maximum static pressure: 16bar;
- Easy maintenance, no need to disconnect water connection;
- Integrated filter that can be cleaned without removing the water connection;
- Anti-backflow function;
- 10 year warranty.



CODE DESCRIPTION

883706 IVC100 PLUS $\frac{3}{8}$ " brass - box

883818 IVC100 PLUS $\frac{3}{8}$ " brass - bag

AZOR SILENT

Inlet valve

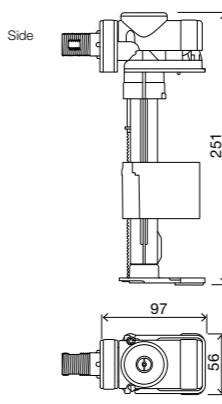


CODE DESCRIPTION

002437 AZOR SILENT side/bottom $\frac{3}{8}$ " brass - blister

- Silent inlet valve <6dB, NF class I certified;
- Side and bottom water supply connection in the same inlet valve;
- Height is adjustable with the bottom connection;
- Easy to install;
- Reduced dimensions;
- Side and bottom inlet valve, with $\frac{3}{8}$ " brass connection (also available in plastic or $\frac{1}{2}$ " plastic or brass);
- Counter pressure closing system (Hydraulic);
- Dynamic pressure functioning range: 0.1 – 14 bar;
- Maximum static pressure: 20 bar;
- Easy maintenance without the need to disconnect from the water connection;
- Anti-Backflow function;
- Some versions compliant with: NF (side version in brass connection);
- 10 year warranty.

COMPACT

Side inlet valve

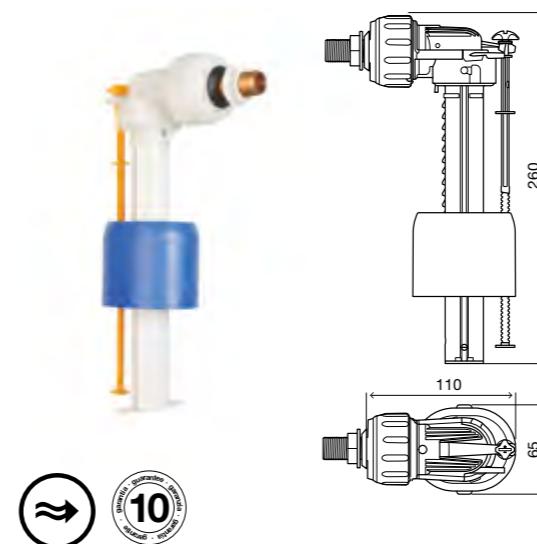

CODE DESCRIPTION



561460 COMPACT $\frac{3}{8}$ " brass - box

561598 COMPACT $\frac{3}{8}$ " brass - bag

- Side inlet valve, with $\frac{3}{8}$ " brass connection (also available in plastic or $\frac{1}{2}$ " plastic or brass);
- Reduced dimensions;
- Counter pressure closing system (Hydraulic);
- Silent valve, class I certified;
- Dynamic pressure functioning range: 0.1 – 10 bar;
- Maximum static pressure: 16 bar;
- Anti-Backflow function;
- Some versions compliant with: KIWA;
- 10 year warranty.

JOLLY UNI

Side inlet valve

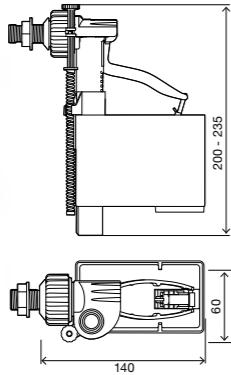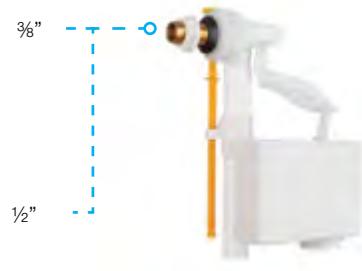

- Side inlet valve, with 3/8" or 1/2" brass connection (also available in plastic);
- Piston closing system (Mechanical);
- Silent valve, NF class I certified;
- Dynamic pressure functioning range: 0.5 – 10 bar;
- Maximum static pressure: 16 bar;
- Anti-Backflow function;
- Some versions compliant with: NF and KIWA;
- 10 year warranty.




CODE DESCRIPTION

560160	JOLLY UNI 3/8" brass - box
560170	JOLLY UNI 1/2" brass - box
044993	JOLLY UNI 3/8" brass - bag
044992	JOLLY UNI 1/2" brass - bag

UNI BOTTOM

Bottom inlet valve

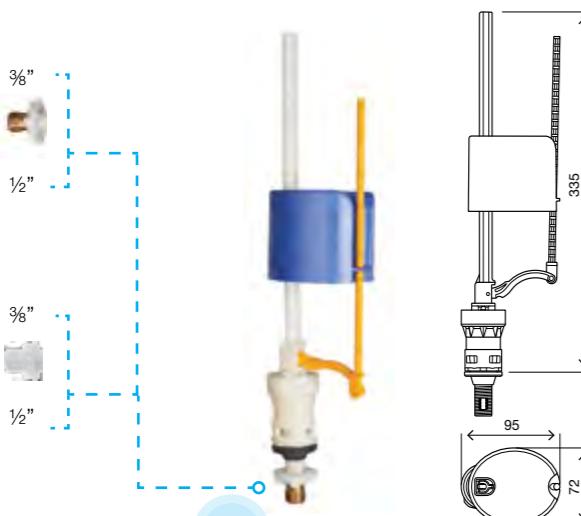

- Bottom inlet valve, with 3/8" or 1/2" in brass or plastic connection;
- Piston closing system (Mechanical);
- Dynamic pressure functioning range: 0.5 – 8 bar;
- Maximum static pressure: 10 bar;
- 10 year warranty.





* Refill Version
NOTE: Mechanical anti-Backflow function available upon request.

CODE DESCRIPTION

562160	UNI BOTTOM 3/8" brass - box
562176	UNI BOTTOM 3/8" plastic - box
562162	UNI BOTTOM 1/2" brass - box
562163	UNI BOTTOM 1/2" plastic - box
092329	UNI BOTTOM refill* 1/2" plastic - box

APOLO

Outlet Valve

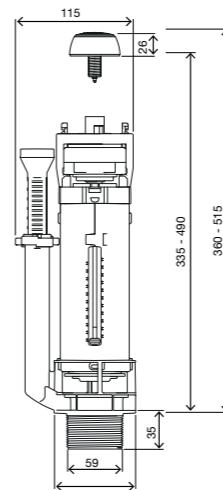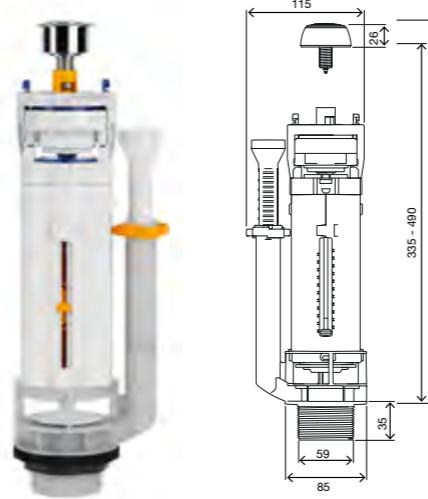

- Dual flush outlet valve with adjustable half and complete water flush volume;
- Universal top push button position that locks the ceramic lid;
- Lateral overflow pipe, higher and easy adjustment;
- Lock/unlock system at the top, one step;
- Allows the off center of the button in ceramic lid 360° with 10° of inclination for each axis
- Mechanical actuation <20N;
- High flow rate flush;
- Damping system – silent operation;
- Easy maintenance (bayonet system);
- Silicone seal;
- Some versions compliant with: Watermark;
- 10 year warranty.



CODE DESCRIPTION



882794	APOLO outlet valve bag
883098	APOLO outlet valve box

Included

- Ceramic cistern fixation to the WC pan;
- WC pan seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø60mm.

BETA

Outlet Valve

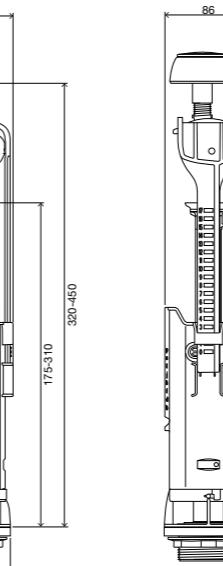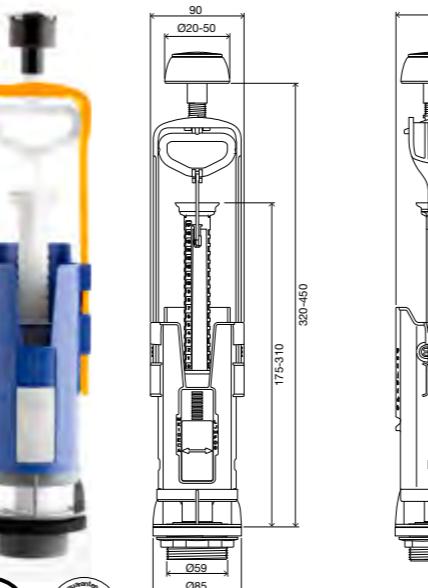

- Adjustable overflow pipe;
- Lever position is the same as the overflow pipe;
- Simpler adjustment of full / half flush;
- Efficient flush with high flow rate;
- Silent operation (damping system).

Included

- Ceramic cistern fixation to the WC pan;
- WC pan seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø 16 to Ø 60mm.


CODE DESCRIPTION

883215	BETA outlet valve bag
--------	-----------------------



ATLAS

Outlet Valve

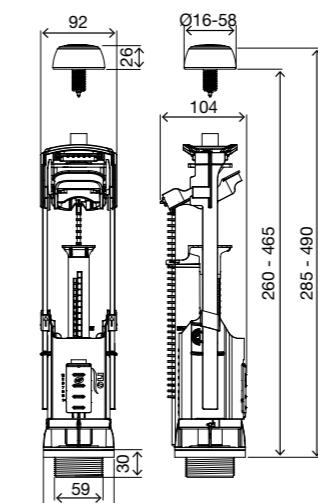

CODE DESCRIPTION

011967 ATLAS - box

135948 ATLAS - bag

- Dual flush outlet valve with adjustable half and complete water flush volume;
- Universal top push button position that locks the ceramic lid;
- Allows the off center of the button on the ceramic lid (25mm on each axis);
- Mechanical actuation <20N;
- High flow rate flush;
- Damping system - silent operation;
- Adjustable telescopic overflow pipe and adjustable lever height;
- Easy maintenance (bayonet system);
- Silicone seal;
- Some versions compliant with: NF, WRAS, SAI, CQC and SIRIM;
- 10 year warranty.

Included

- Ceramic cistern fixation system to the WC pan;
- WC pan seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø60mm.




Allows the decentralization of the button in ceramics lids.

25mm

FAST START/STOP

Outlet Valve

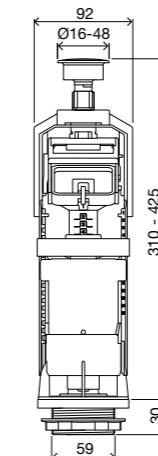

CODE DESCRIPTION

100019 FAST START/STOP - box

088755 FAST START/STOP - bag

- Single flush outlet valve with start/stop system;
- Universal top push button position that locks the ceramic lid;
- Allows the off center of the button on the ceramic lid (20mm on one axis);
- Mechanical actuation <20N;
- High flow rate flush;
- Adjustable telescopic overflow pipe and adjustable lever height;
- Easy installation and maintenance (bayonet system);
- EPDM seal;
- 10 year warranty.

Included

- Ceramic cistern fixation system to the WC pan;
- WC pan seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø40mm;
- 2 adaptors.




Allows the decentralization of the button in ceramics lids.

25mm

ATLAS CABLE

Outlet Valve

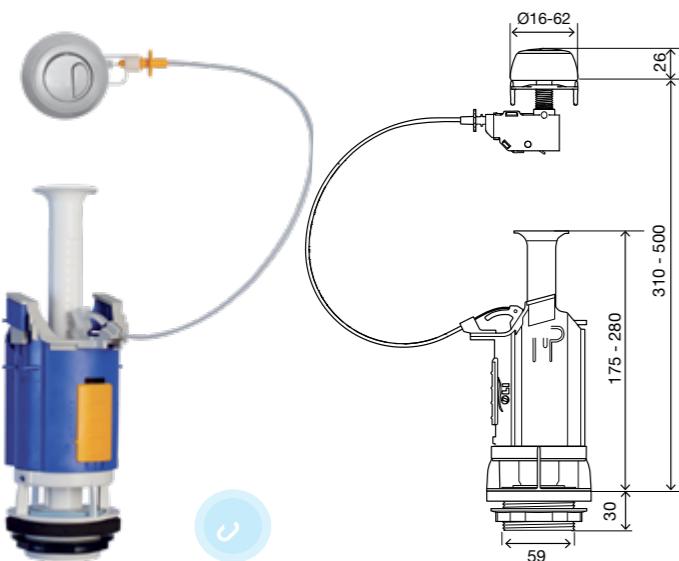

CODE DESCRIPTION

501120 ATLAS CABLE - box

022369 ATLAS CABLE - bag

880333 ATLAS CABLE ONE PIECE - box

880334 ATLAS CABLE ONE PIECE - bag

- Dual flush outlet valve with adjustable half and complete water flush volume;
- Universal and flexible application (front, top or side push button position);
- Cable actuation < 20 N;
- High flow rate flush;
- Damping system - silent operation;
- Adjustable telescopic overflow pipe;
- Easy installation and maintenance (bayonet system);
- Silicone seal;
- Some versions compliant with: NF;
- ONE PIECE version compatible with ONE PIECE WC
- 10 year warranty.

Included

- Ceramic cistern fixation system to the WC pan;
- WC pan seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø60mm.

PUSH ECO

Outlet Valve



CODE DESCRIPTION

501020 PUSH ECO - box

501021 PUSH ECO - bag


- Single flush outlet valve;
- Universal top push button position;
- Mechanical actuation <20N;
- High flow rate flush;
- Adjustable telescopic overflow pipe and adjustable lever height;
- Easy installation and maintenance (bayonet system);
- EPDM seal;
- 10 year warranty.

Included

- Ceramic cistern fixation system to the WC pan;
- WC pan seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø40mm.

ECO TIRETTE

Outlet Valve



CODE DESCRIPTION

507572 ECO TIRETTE - box

500321 ECO TIRETTE - bag

- Single flush outlet valve;
- Universal top pull button position;
- Mechanical actuation <20N;
- High flow rate flush;
- Adjustable telescopic overflow pipe and adjustable lever height;
- Easy installation and maintenance (bayonet system);
- EPDM seal;
- 10 year warranty.

Included

- Ceramic cistern fixation system to the WC pan;
- WC pan seal foam (that compensates the ceramic irregularity);
- Chrome pull button for cisterns with lid holes from Ø16 to Ø40mm.

HANDLE

Outlet Valve



- Single flush outlet valve;
- Universal front handle button position;
- Mechanical actuation <20N;
- High flow rate flush;
- Adjustable telescopic overflow pipe;
- Easy installation and maintenance (bayonet system);
- EPDM seal;
- 10 year warranty.

Included


- Ceramic cistern fixation system to the WC pan;
- WC pan seal foam (that compensates the ceramic irregularity);
- Chrome handle button for cisterns with Ø16 hole.


CODE DESCRIPTION

501420 ⚒ HANDLE - box

PUSH ECO + ECO

Single flush mechanism kit, side connection

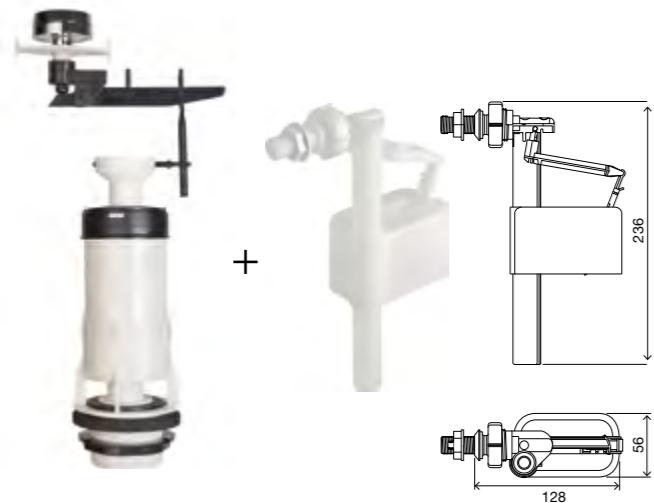

- Push Eco outlet valve (see page 173);

Eco inlet valve:

- Side inlet valve, with ¾" plastic connection;
- Piston closing system (Mechanical);
- Dynamic pressure functioning range: 0.5 – 8 bar;
- Maximum static pressure: 10 bar;
- Anti-Backflow function;
- 10 year warranty.


CODE DESCRIPTION

501023 ⚒ PUSH ECO + ECO - bag

PUSH ECO + UNI BOTTOM

Single flush mechanism kit, bottom connection



- Push Eco outlet valve (see page 172);
- Uni Bottom inlet valve ¾" plastic connection (see page 166);
- 10 year warranty.


CODE DESCRIPTION

501034 ⚒ PUSH ECO + UNI BOTTOM - bag

FAST START/STOP + COMPACT

Start/stop flush mechanism kit, side connection



- Fast Start/Stop outlet valve (see page 169);
- Compact ¾" inlet valve brass connection (see page 165);
- 10 year warranty.


CODE DESCRIPTION

100023 ⚒ FAST START/STOP + COMPACT - box

100022 ⚒ FAST START/STOP + COMPACT - bag

FAST START/STOP + UNI BOTTOM

Start/stop flush mechanism kit, bottom connection




- Fast Start/Stop outlet valve (see page 169);
- Uni Bottom inlet valve $\frac{3}{8}$ " brass connection (see page 166);
- 10 year warranty.



CODE	DESCRIPTION
100032	FAST START/STOP + UNI BOTTOM - box
100031	FAST START/STOP + UNI BOTTOM - bag

IVC100 + ATLAS CABLE

Dual flush mechanism kit, side/bottom connection

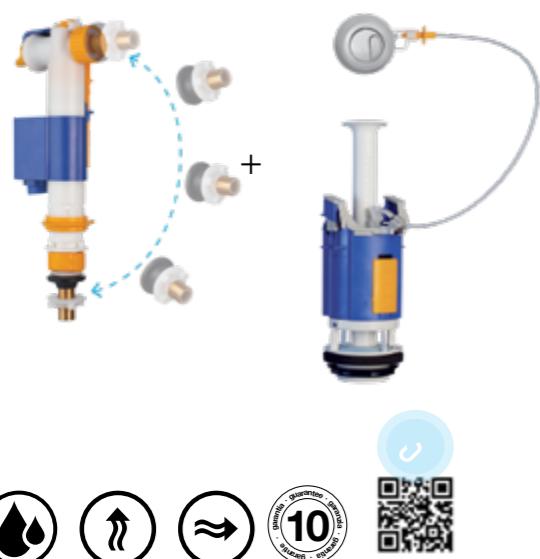


- Atlas cable outlet valve (see page 170);
- IVC100 inlet valve brass connection (see page 164);
- 10 year warranty.

CODE	DESCRIPTION
099938	IVC100 + ATLAS CABLE - bag
099939	IVC100 + ATLAS CABLE - box

OLIPURE KIT

Ceramic cisterns

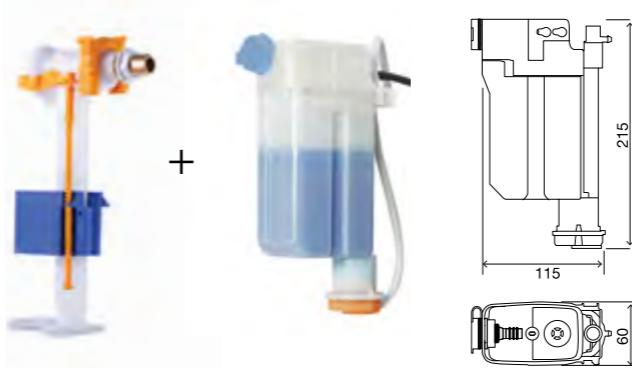


- Azor side $\frac{3}{8}$ " brass connection
- OLIPure system;
- 350mm Refill connection pipe;
- 130mm Outlet valve connection pipe;
- Only suitable for ceramic cisterns with side connections and QUARZO;
- 10 year warranty.



CODE	DESCRIPTION
101768	OLIPure kit - box


ACCESSORIES

SIDE COVER

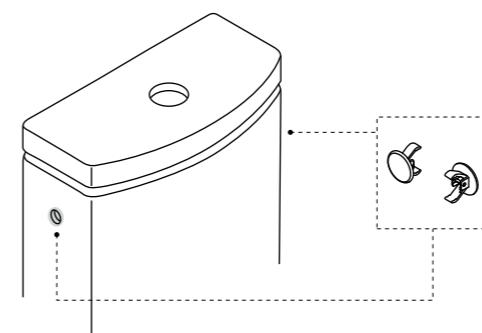

CODE	DESCRIPTION
493064	Side cover White
493065	Side cover Polished Chrome

BOTTOM COVER

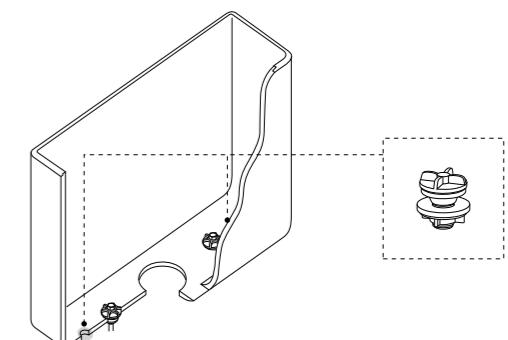

CODE	DESCRIPTION
058025	Bottom cover

OLIFILLO



Shower systems built into the floor or wall allowing for greater ease of cleaning and design in your bathroom.



OLIFILLO PREMIUM
Page 179



OLIFILLO STANDARD
Page 179



OLIFILLO CERAMIC
Page 180



OLIFILLO BASIC
Page 180



OLIFILLO WALL
Page 181




OLIFILLO SQUARE
Page 181





OLIFILo PREMIUM

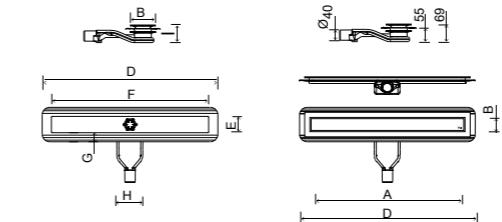

- Stainless steel body, grid with frame in brushed stainless steel;
- Easy to install and maintain;
- Ideal for people with reduced mobility.


A	B	C	D	E	F	G	H	I
836	96	135	875	64	804	35	100	70
936	96	135	975	64	904	35	100	70



CODE DESCRIPTION

- 300301 OLIFILo premium 80
300303 OLIFILo premium 90
300300 Support legs

OLIFILo STANDARD

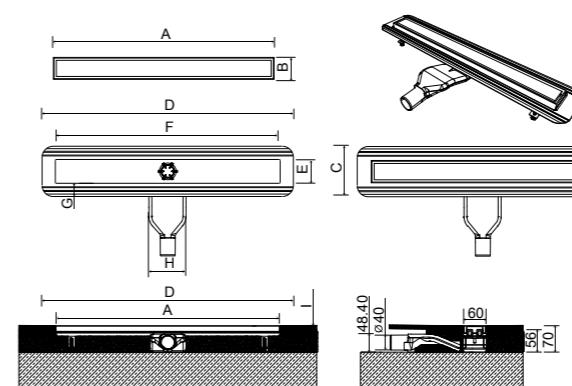

- Stainless steel body, smooth grid in brushed stainless steel;
- Easy to install and maintain;
- Ideal for people with reduced mobility.

A	B	C	D	E	F	G	H	I
700	60	135	775	64	704	35	100	70
800	60	135	875	64	804	35	100	70
900	60	135	975	64	904	35	100	70
1100	60	135	1175	64	1104	35	100	70




CODE DESCRIPTION

- 300310 OLIFILo standard 70
300312 OLIFILo standard 80
300314 OLIFILo standard 90
300316 OLIFILo standard 110
300300 Support legs

OLIFILo CERAMIC



- Stainless steel body, grid for a ceramic finish;
- Easy to install and maintain;
- Ideal for people with reduced mobility.

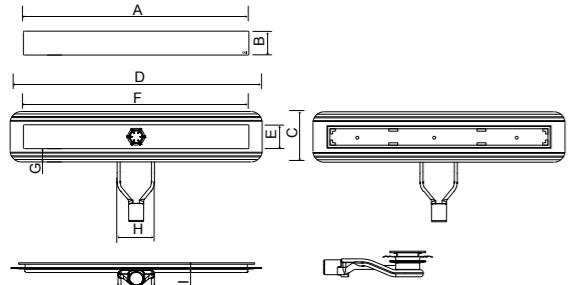

A	B	C	D	E	F	G	H	I
800	60	135	875	64	804	35	100	73



CODE DESCRIPTION


300330 OLIFILo CERAMIC 80

300300 Support legs

OLIFILo WALL



- Wall drain in brushed stainless steel;
- Easy to install and maintain;
- Ideal for people with reduced mobility.

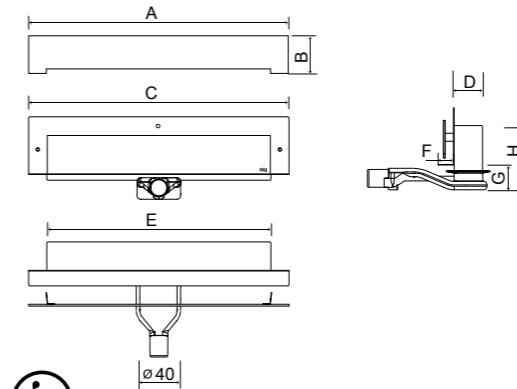

A	B	C	D	E	F	G	H
386	85	386	65	304	33	57	145



CODE DESCRIPTION


300350 OLIFILo wall 30

300300 Support legs

OLIFILo BASIC



- Stainless steel body, grid in shiny stainless steel satin;
- Easy to install and maintain;
- Ideal for people with reduced mobility.

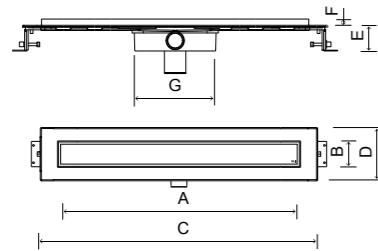

A	B	C	D	E	F	G	H	I
403	66	488	132	72	14	197	Ø40	Ø50
503	66	588	132	72	14	197	Ø40	Ø50
603	66	688	132	72	14	197	Ø40	Ø50
703	66	788	132	72	14	197	Ø40	Ø50
803	66	888	132	72	14	197	Ø40	Ø50
903	66	988	132	72	14	197	Ø40	Ø50
1003	66	1088	132	72	14	197	Ø40	Ø50



CODE DESCRIPTION

300341 OLIFILo basic 40

300343 OLIFILo basic 50

300340 OLIFILo basic 60

300347 OLIFILo basic 70

CODE DESCRIPTION

300342 OLIFILo basic 80


300345 OLIFILo basic 90

300346 OLIFILo basic 100

OLIFILo SQUARE



- Square siphon shower drain in brushed stainless steel 20x20;
- Easy to install and maintain;
- Ideal for people with reduced mobility.



A	B	C	D	E	F	G	H
100	200	200	98	20	63	43	48




CODE DESCRIPTION

300360 OLIFILo square 20

SPARE PARTS




EASY MOVE

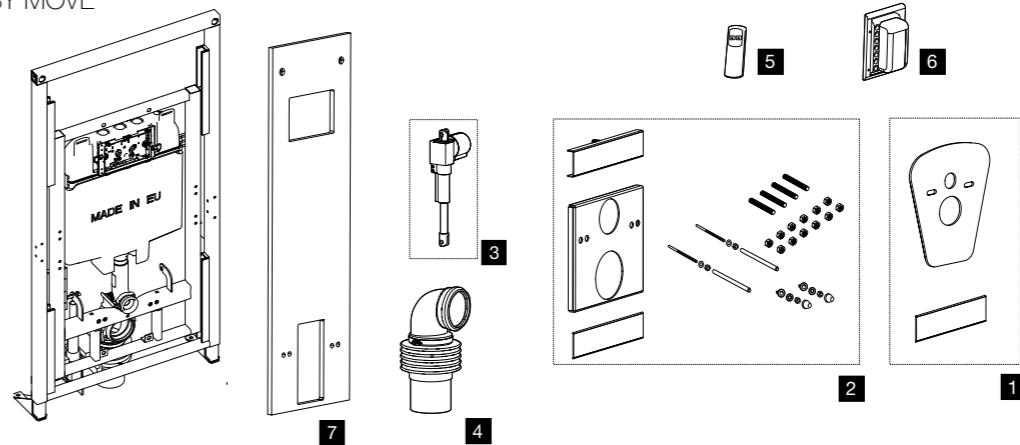


Nr.	Code	Description	Qt. Code
1	054650	Acoustic insulation	1
2	054409	Accessories for wc pan fixation	1
3	054495	Hydraulic engines	1
4	054649	Extensible outlet bend	1
5.1	054641	Wireless remote control	1
5.2	054642	Wired remote control	1
6.1	054644	Wireless remote control transformer	1
6.2	054497	Wired remote control transformer	1
7	879146	Wood support fixation	1

NOTE: Remaining spare parts page 190.


EASY MOVE WASHBASIN

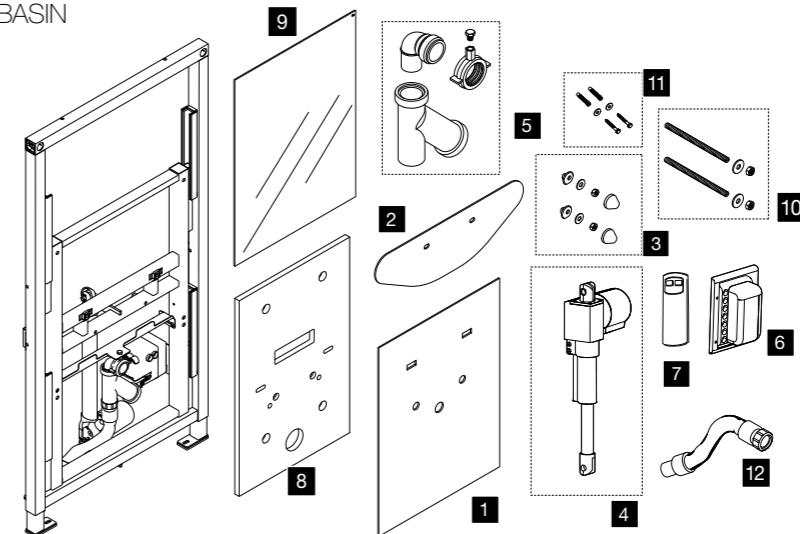

Nr.	Code	Description	Qt. Code
1.1	883045	Glass Black	1
1.2	883046	Glass White	1
2	620072	Acoustic insulation	1
3	036883	Washbasin fixation	1
4	883043	Hydraulic Engine	1
5	883044	Washbasin Siphon	1
6	054644	Wireless remote control transformer	1
7	054641	Wireless remote control	1
8	883047	Wood support fixation	1
9	883048	Mirror	1
10	037148	Fixation screws	1
11	036886	Frame accesories kit M12	1
12	883037	Flexible Siphon	1

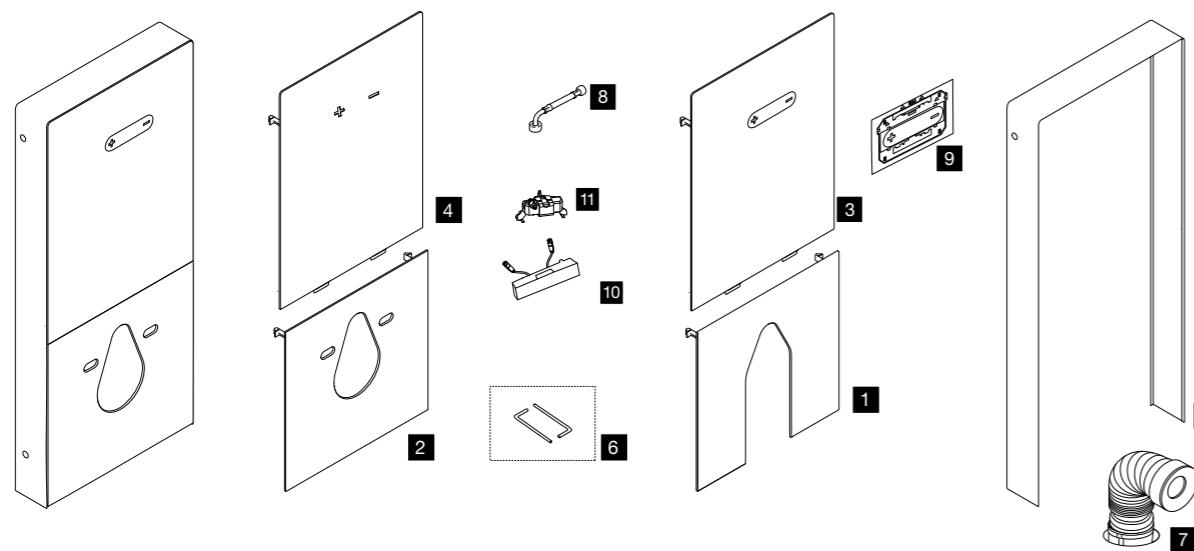


Nr.	Code	Description	Qt.	Code
1.1	079894	QR-INOX White bottom floor glass	1	
1.2	079889	QR-INOX Black bottom floor glass	1	
2.1	079893	QR-INOX White bottom glass hung wc	1	
2.2	079888	QR-INOX Black bottom glass hung wc	1	
2.3	879121	QR-INOX Gold bottom glass hung wc	1	
2.4	879122	QR-INOX Taupe bottom glass hung wc	1	
2.5	879124	QR-INOX Anthracite bottom glass hung wc	1	
2.6	879125	QR-INOX Red bottom glass hung wc	1	
3.1	079890	QR-INOX White button top glass	1	
3.2	079886	QR-INOX Black button top glass	1	
3.3	878722	QR-INOX Gold button top glass	1	
3.4	878723	QR-INOX Taupe button top glass	1	
3.5	878724	QR-INOX Anthracite button top glass	1	
3.6	878725	QR-INOX Red button top glass	1	
4.1	079891	QR-INOX White no-touch top glass	1	
4.2	079887	QR-INOX Black no-touch top glass	1	
5.1	879139	QR-INOX side frame freestanding	1	
5.2	879137	QR TOTAL Black side frame	1	
5.3	879138	QR TOTAL White side frame	1	
5.4	079927	QR-INOX side frame	1	
6	079928	Screwdrivers for maintenance access	2	
7	079929	Flexible outlet wc bend	1	
8	079932	QR-INOX button flexible hose	1	
9	079937	QR-INOX push button	1	
10	898680	Cap sensor	1	
11	878681	Servomotor block	1	

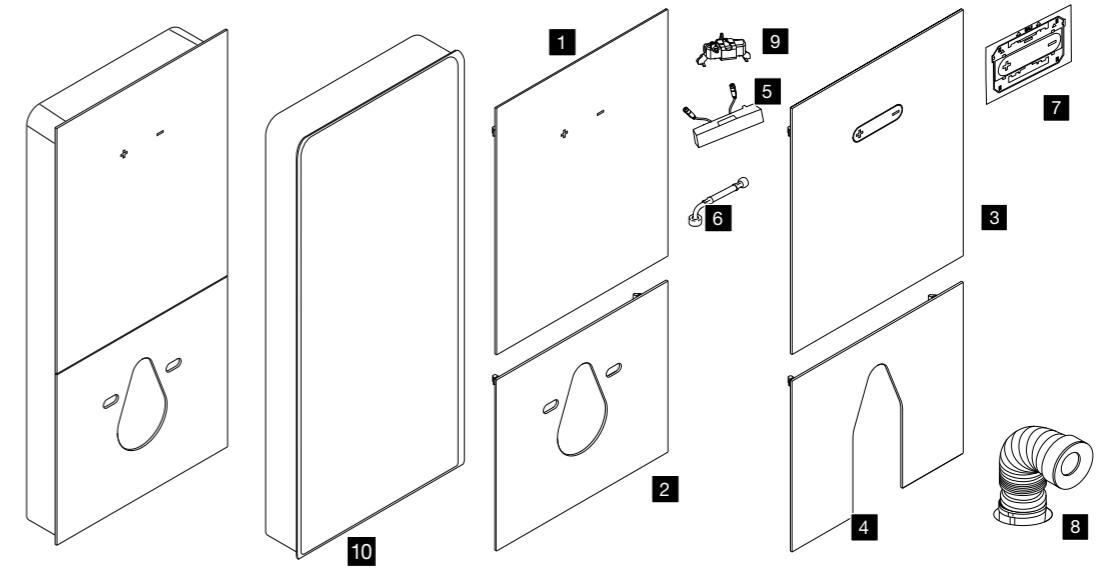

Nr.	Code	Description	Qt.	Code
1.1	880638	SEAL BOX White no-touch top glass	1	
1.2	880637	SEAL BOX Black no-touch top glass	1	
2.1	880634	SEAL BOX White bottom glass hung wc	1	
2.2	880633	SEAL BOX Black bottom glass hung wc	1	
3.1	880636	SEAL BOX White button top glass	1	
3.2	880635	SEAL BOX black button top glass	1	
4.1	880653	SEAL BOX White bottom floor glass	1	
4.2	880652	SEAL BOX Black bottom floor glass	1	
5	878680	Cap sensor	1	
6	079932	QR-INOX button flexible hose	1	
7	079937	QR-INOX push button	1	
8	079929	Flexible outlet wc bend	1	
9	878681	Servomotor block	1	
10	883198	BOX SEAL BOX	1	


QR-BOX

NOTE: Flush Cistern spare parts page 188.

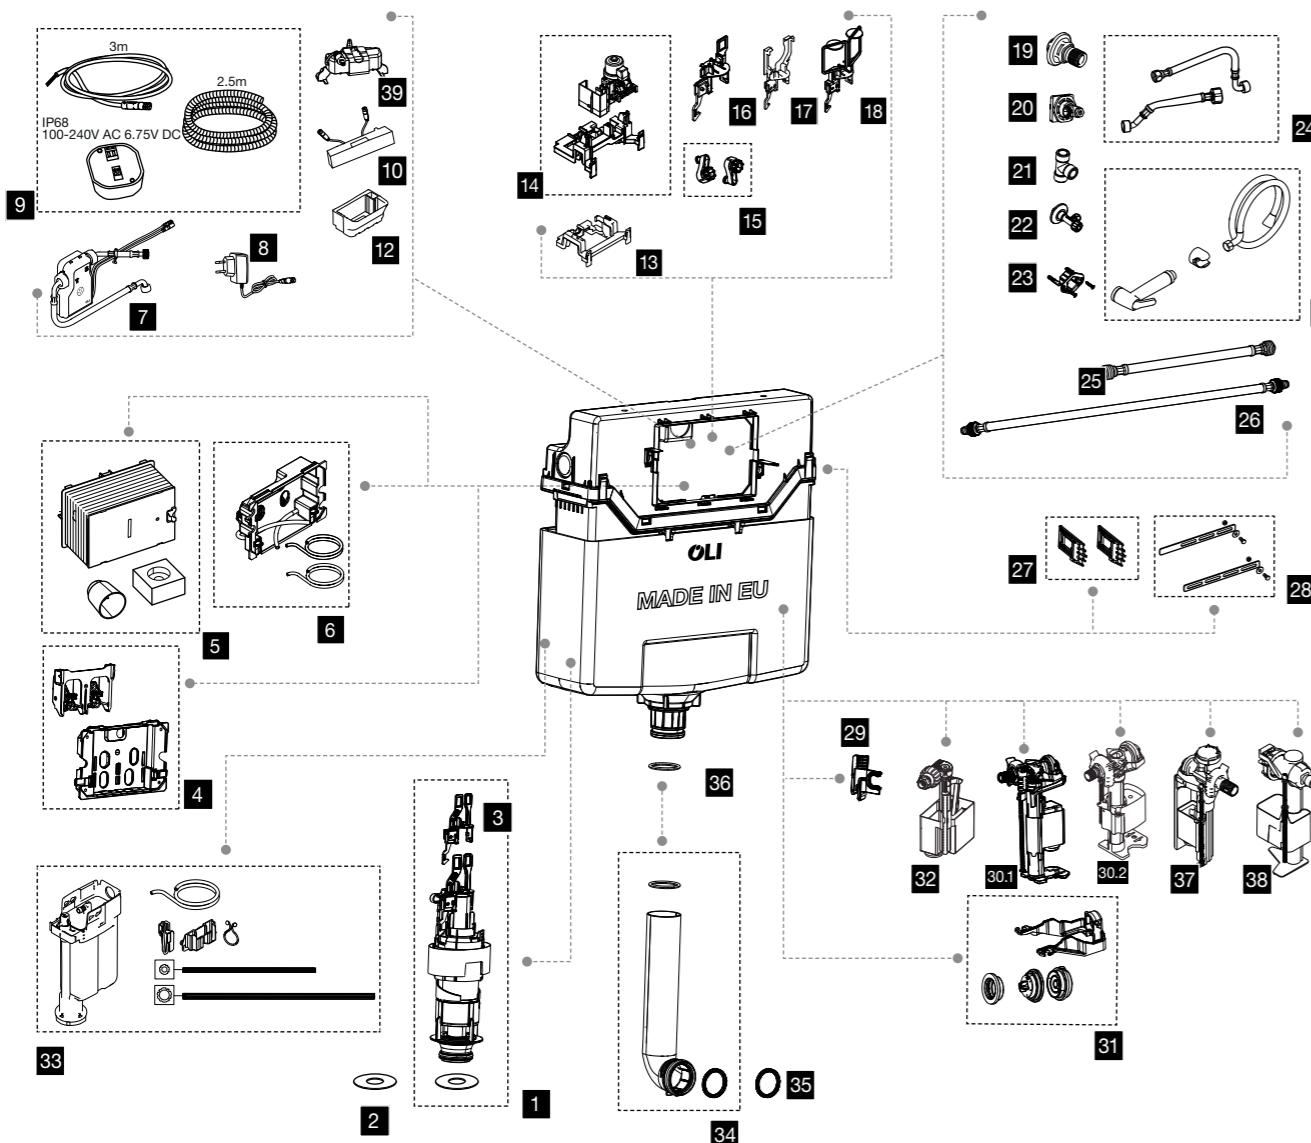


Nr.	Code	Description	Qt. Code
1	101756	Outlet valve	1
2	883174	Outlet valve seal	5
3	101745	Mechanic outlet valve anchors	1
4	101757	Protective plate with mechanic outlet valve lever	1
5	026698	Protective box >09	1
6	154084	Protective plate with pneumatic set	1
7	879252	Turbine with flexible pipes	1
8	878676	Charger	1
9	878674	AC transformer	1
10	878680	Cap sensor	1
11	878933	Hand shower	1
12	878678	Turbine support	1
13	878746	Central block	1
14	878810	Electronic actuator	1
15	011150	Control plate fixers	2
16	878809	Electronic anchors	1
17	878768	Cap Hydroboost/Cap AC outlet valve anchors	1
18	877843	Pneumatic outlet valve anchors	1
19	878675	Connection	1
20	101755	Stop valve	1
21	878934	Brass connection 3/8 SHT	1
22	878937	Stop valve 1/2X10 SHT	1
23	878939	Wall fixation SHT	1
24	878852	Flexible pipes (turbine)	1
25	101754	Flexible hose 3/8 / 3/8 x 215	1
26	878932	Flexible hose 1/2FX3/8F 1200 SHT	1
27	101759	Fixation for sanitärblock frame	2
28	021210	Fixation kit without frame	2
29	101749	Inlet valve support	5
30.1	091096	Inlet valve AZOR PLUS 3/8	1
30.2	882654	AZOR 3/8" OLIPURE	1
31	012001	Inlet valve membrane AZOR	1
32	179412	Inlet valve UNI 3/8	1
33	181713	OLIPURE kit	1
34	101761	Complete flush pipe	1
35	101753	Flush pipe seal Ø45	5
36	021212	O-Ring Ø37	5
37	883111	AG104 PLUS 3/8p	1
38	882495	Nano inlet valve	1
39	878681	Servomotor block	1



OLI74 PLUS

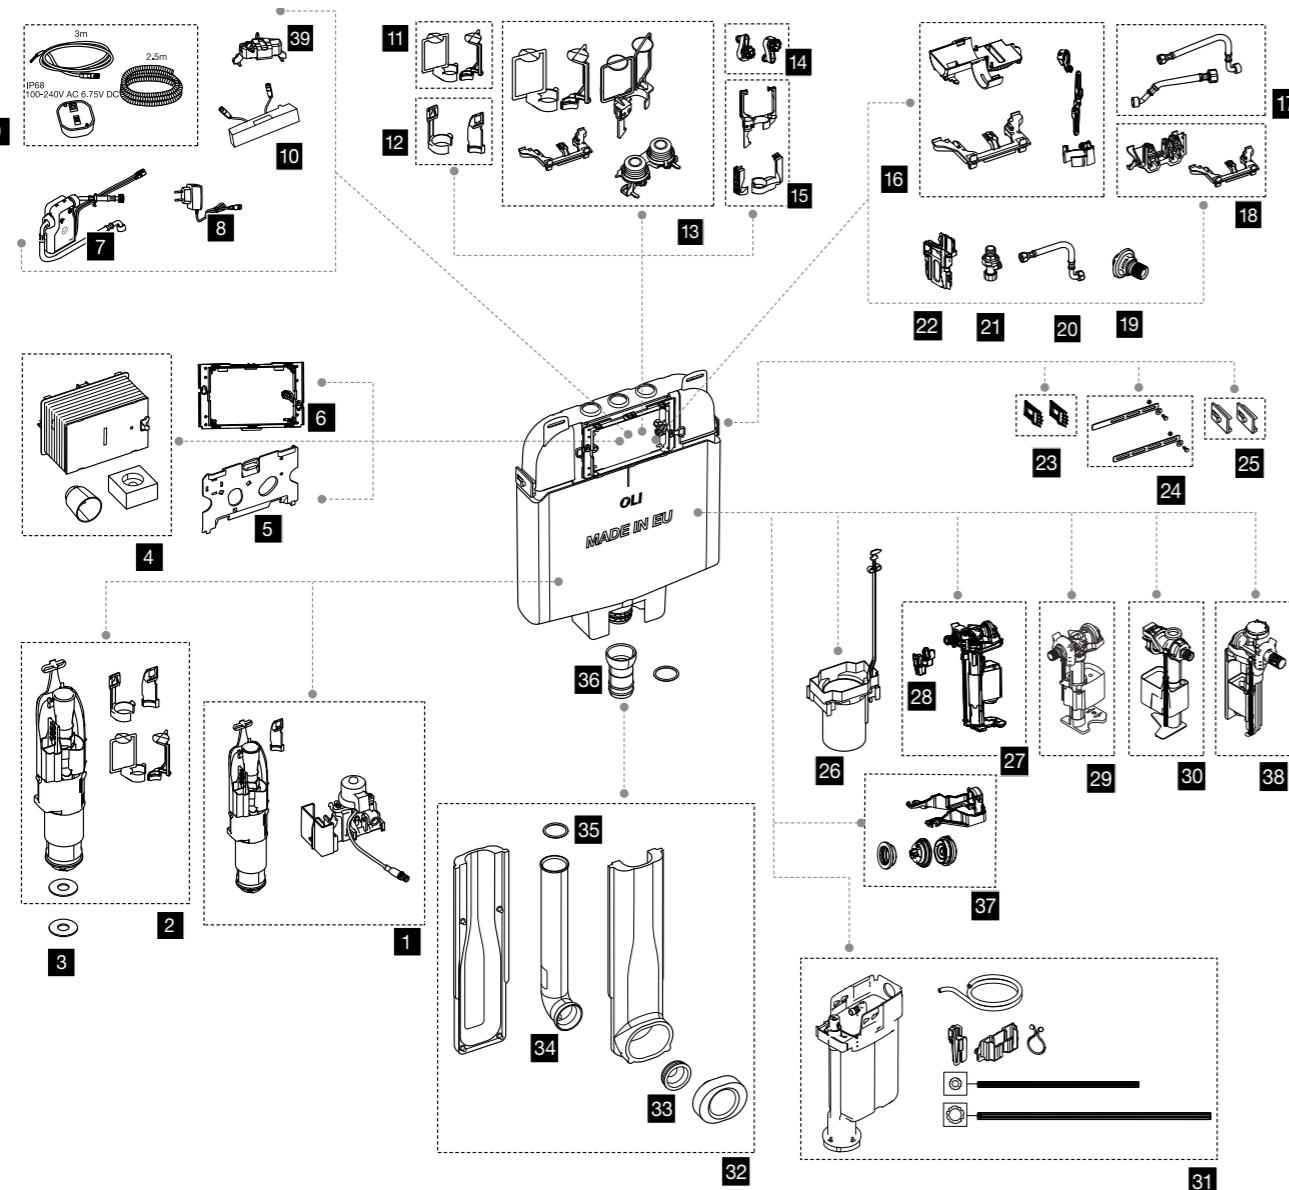

Nr.	Code	Description	Qt. Code
1	077754	Electronic kit (flush valve included)	1
2	002992	Outlet valve	1
3	883028	Outlet valve seal 60X23.8X2.7	5
4.1	026698	Protective box >09	1
4.2	002527	Protective box <09	1
5.1	021271	Protective plate >09	1
5.2	053424	Protective plate <09	1
6	011195	Base for protective box	1
7	878677	Turbine with flexible pipes	1
8	878676	Charger	1
9	878674	AC transformer	1
10	878680	Cap sensor	1
11	878811	Pneumatic outlet valve anchors	1
12	011440	Mechanic outlet valve anchors	1
13	601527	Pneumatic set	1
14	011150	Control plate fixers	2
15	074745	Cap Hydroboost/Cap AC outlet valve anchors	1
16	036936	Electronic system set < 14	1
17	878851	Flexible pipes (turbine)	1
18	011973	Lever block	1
19	878675	Connection	1
20	033424	Flexible hose ¾ / ¾ x 215	1
21	011972	Stop valve	1
22	878679	Turbine support	1
23	006973	Fixation for Sanitarblock frame	10
24	021210	Fixation kit without frame	1
25	006971	Simflex fixation	10
26	026701	Outlet valve guide	1
27	091096	Inlet valve AZOR PLUS ¾"	1
28	006968	Inlet valve support	5
29	882654	AZOR ¾" OLIPURE	1
30	882495	Nano inlet valve	1
31	181713	OLIPURE KIT	1
32	049510	Complete flush pipe	1
33	021209	Flush pipe seal Ø40/45	5
34	021266	Flush pipe 56X360	1
35	021212	O-Ring Ø37	5
36	049504	Articulated pipe with O-Ring	1
37	012001	Inlet valve membrane AZOR	1
38	883111	AG104 PLUS 3/8p	1
39	878681	Servomotor block	1


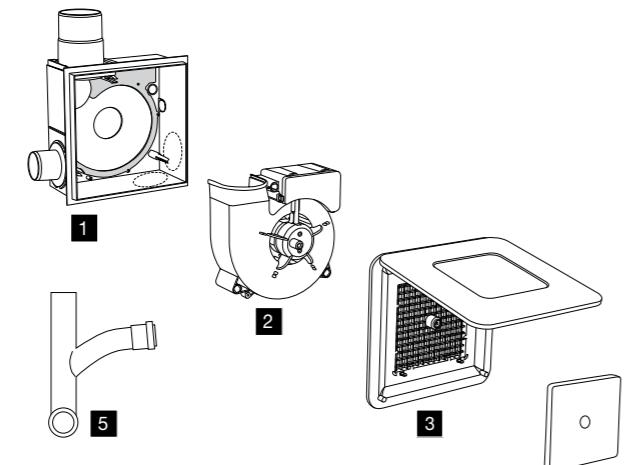


Nr.	Code	Description	Qt. Code
1	880710	Fan box	1
2.1	880713	Happy air fan	1
2.2	880714	Happy air Plus fan	1
3.1	880711	Covering plate for Happy air	1
3.2	880712	Covering plate for Happy Plus	1
4	880715	Filter for Happy air and Happy air Plus	5
5.1	054673	"Y" flush pipe (OLI74)	1
5.2	882829	"Y" flush pipe (OLI120PLUS)	1

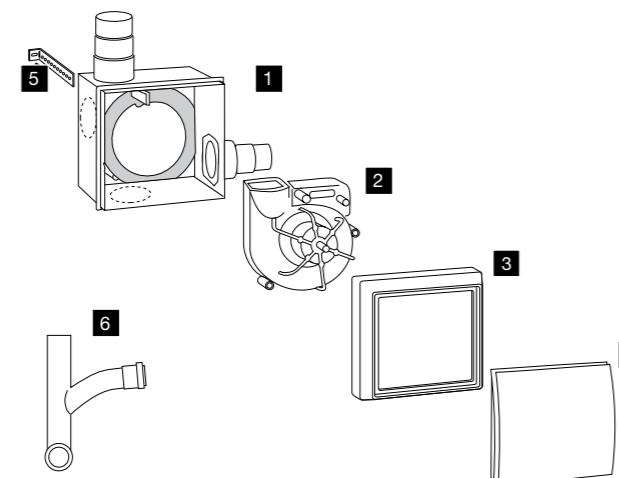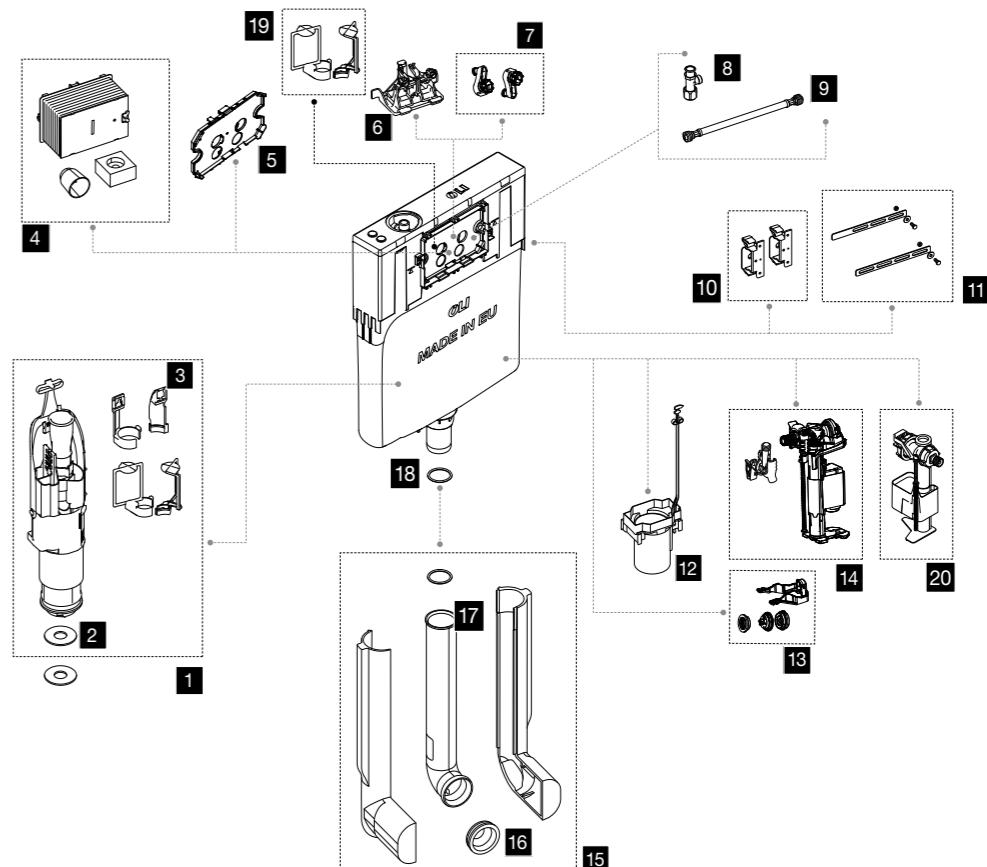


Nr.	Code	Description	Qt. Code
1	601539	Fan box	1
2	601541	Happy air fan	1
3	601535	Frame for 105mm walls	1
4	601540	Covering plate with filter	1
5	601536	Fixation kit (2 metal plates and screws)	1
6	054673	"Y" flush pipe (OLI74)	1

Nr.	Code	Description	Qt. Code
1	002992	Outlet valve	1
2	883028	Outlet valve seal 60X23.8X2.7	5
3	011440	Mechanic outlet valve anchors	1
4	026698	Protective box >09	1
5	033412	Protective plate	1
6	026709	Lever block	1
7	011150	Control plate fixers	2
8	021206	Stop valve	1
9	021204	Flexible hose ¾ / ¾ X 250	1
10	021213	Fixers	2
11	021210	Fixation kit without frame	1
12	026701	Outlet valve guide	1
13	012001	Inlet valve membrane AZOR	1
14	021203	Inlet valve ¾	1
15	021267	Complete flush pipe	1
16	021209	Flush pipe seal Ø40/45	5
17	021266	Flush pipe 56X360	1
18	021212	O-Ring Ø37	5
19	878811	Pneumatic outlet valve anchors	1
20	882495	Nano inlet valve	1

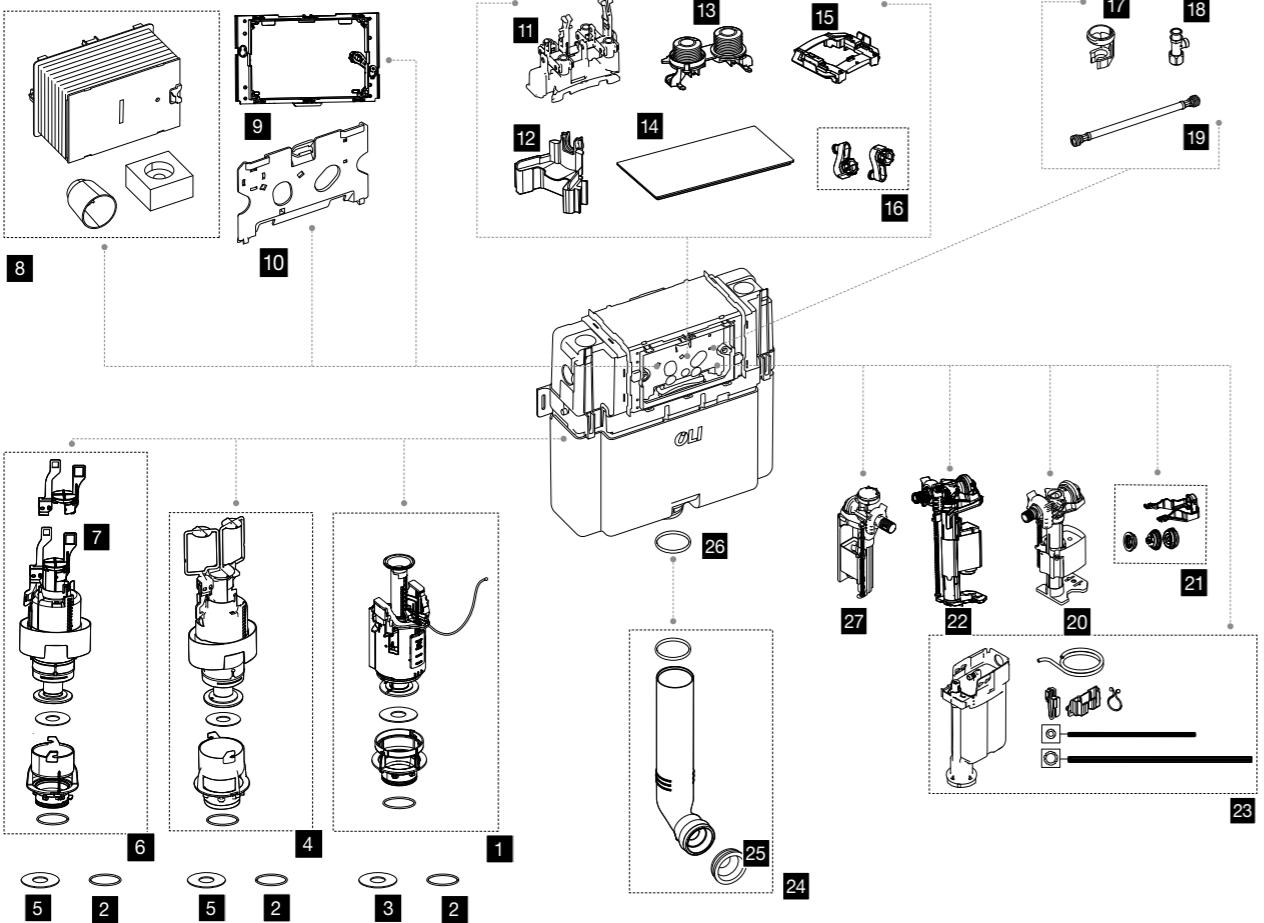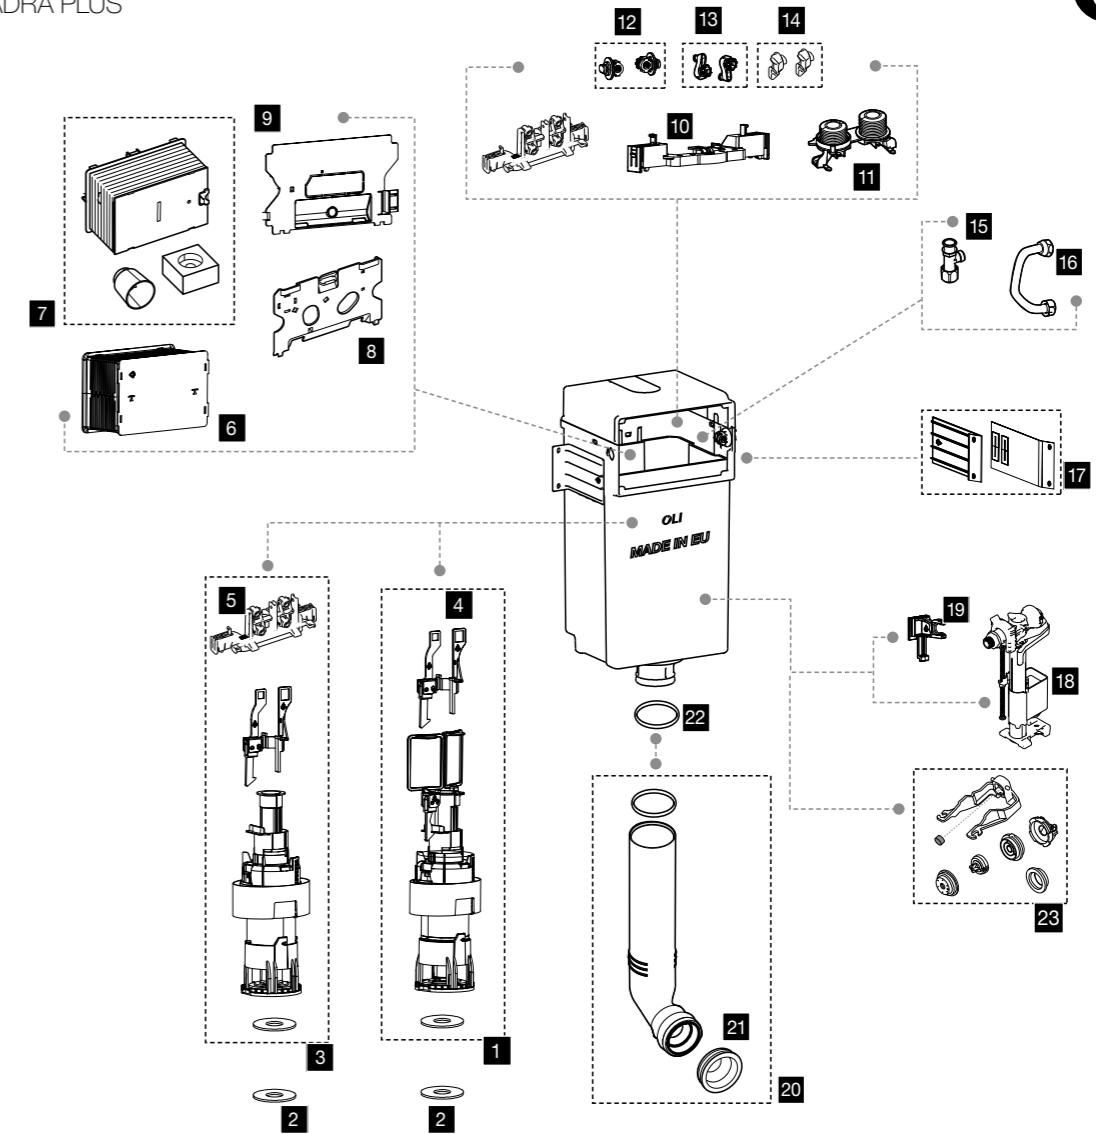
EXPERT PLUS

QUADRA PLUS


Nr.	Code	Description	Qt.	Code
1	030484	Outlet valve cable	1	
2	883224	O-Ring valve guide	5	
3	883226	Cable outlet valve seal 60x26.5x2	10	
4	033126	Pneumatic outlet valve	1	
5	883028	Outlet valve seal 60X23.8X2.7	5	
6	033125	Mechanic outlet valve	1	
7	056934	Mechanic outlet valve anchors	1	
8	026698	Protective box >09	1	
9	011195	Base for protective box	1	
10	021271	Protective plate >09	1	
11	033303	Lever block	1	
12	011954	Inlet valve support	1	
13	033301	Pneumatic block bellows	1	
14	033314	Protective plate	1	
15	021269	Central block	1	
16	011150	Control plate fixers	2	
17	021272	Stop valve support	1	
18	021206	Stop valve	1	
19	021270	Flexible hose 3/8 / 3/8 X 30	1	
20	882654	AZOR 3/8" OLIpure	1	
21	012001	Inlet valve membrane AZOR	1	
22	021203	Inlet valve 3/8	1	
23	181713	OLIpure kit	1	
24	011982	Flush pipe 315	1	
25	021209	Flush pipe seal Ø40/45	5	
26	033313	Flush pipe O-Ring Ø55	5	
27	883111	AG104 PLUS 3/8p	1	

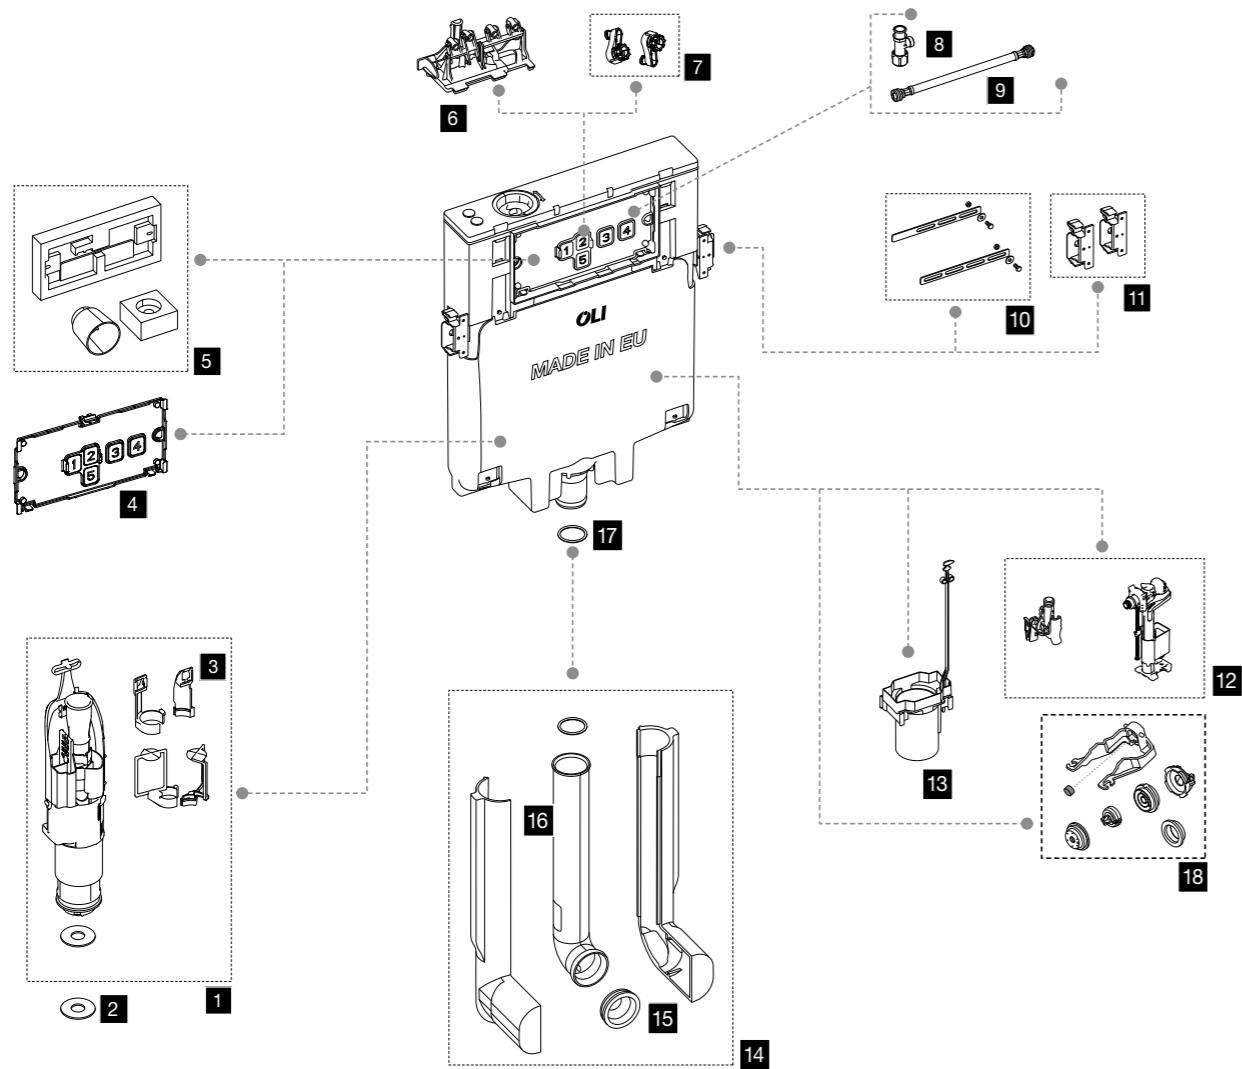
DIAMANTE

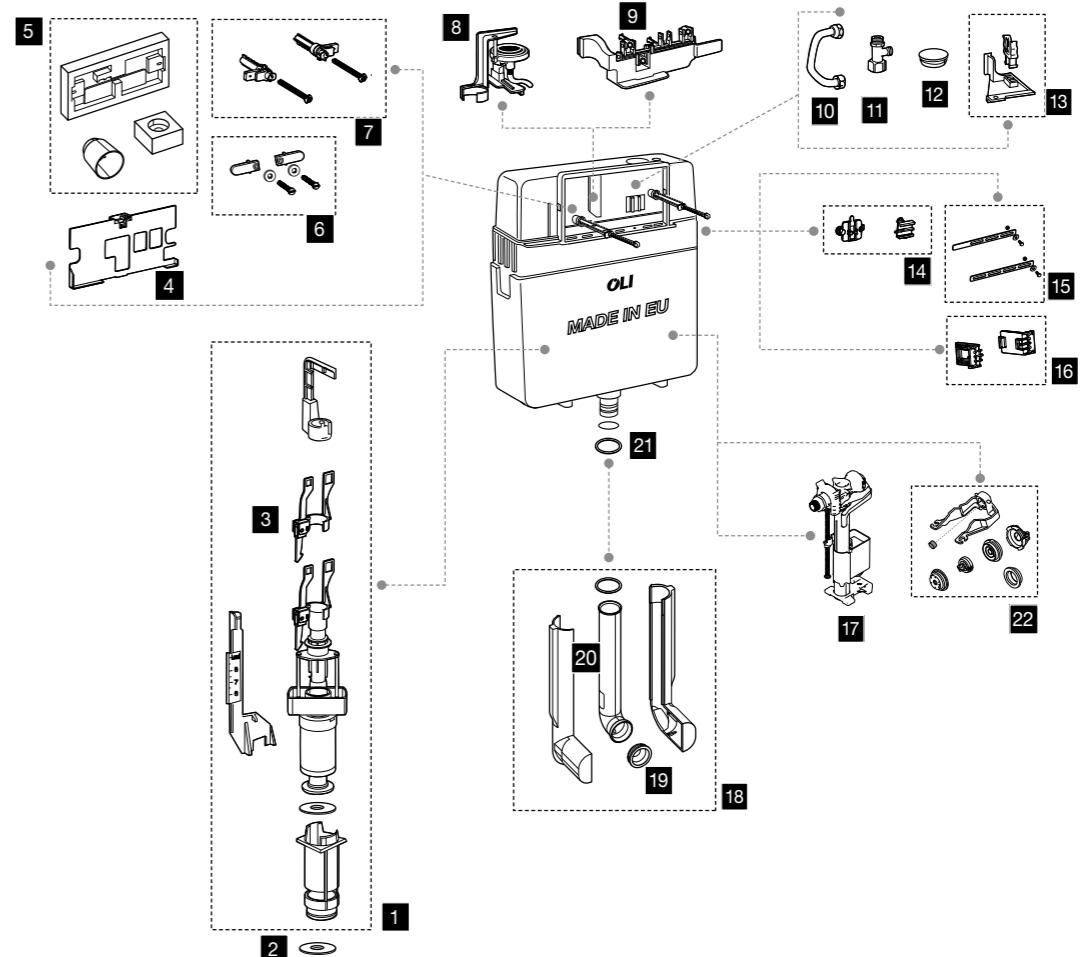


Nr.	Code	Description	Qt. Code
1	002992	Outlet valve	1
2	883028	Outlet valve seal 60X23.8X2.7	5
3	011440	Mechanic outlet valve anchors	1
4	021207	Protective plate	1
5	021211	Protective box	1
6	021208	Lever block	1
7	011150	Control plate fixers	2
8	021206	Stop valve	1
9	021204	Flexible hose 3/8 / 3/8 X 250	1
10	021210	Fixation kit without frame	1
11	021213	Fixers	2
12	021203	Inlet valve 3/8	1
13	026701	Outlet valve guide	1
14	021267	Complete flush pipe	1
15	021209	Flush pipe seal Ø40/45	5
16	021266	Flush pipe 56X360	1
17	021212	O-Ring Ø37	5
18	012001	Inlet valve membrane AZOR	1




Nr.	Code	Description	Qt. Code
1	037106	Outlet valve	1
2	883028	Outlet valve seal 60X23.8X2.7	5
3	056932	Mechanic outlet valve anchors	1
4	033494	Protective plate	1
5	021211	Protective box	1
6	015639	Fixation kit <99	1
7	037104	Fixation kit >99	1
8	556805	Pneumatic block	1
9	032477	Lever block	1
10	049513	Copper bend with seal	1
11	021206	Stop valve	1
12	037105	Cover protection	5
13	049512	Inlet valve support	1
14	048607	Lever block fixer	1
15	021210	Fixation kit without frame	1
16	011975	Fixers	10
17	021203	Inlet valve 3/8	1
18	021267	Complete flush pipe	1
19	021209	Flush pipe seal Ø40/45	5
20	021266	Flush pipe 56X360	1
21	021212	O-Ring Ø37	1
22	012001	Inlet valve membrane AZOR	1

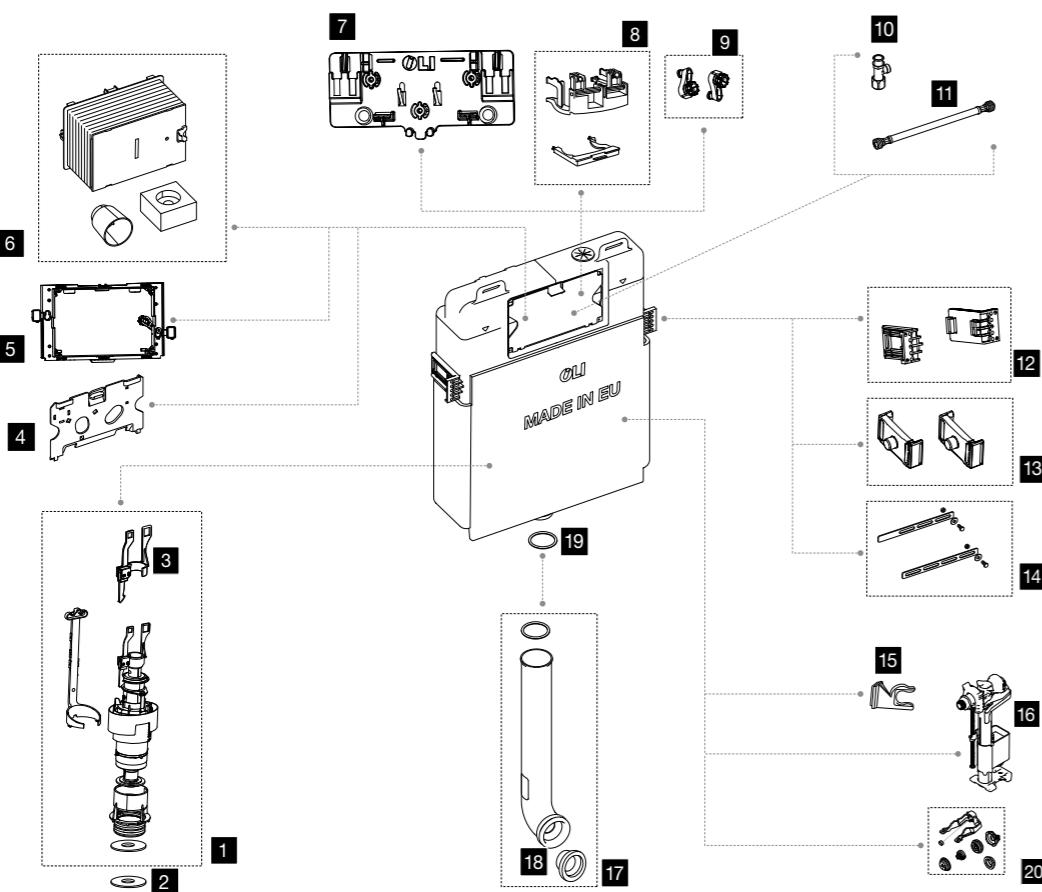

Nr.	Code	Description	Qt. Code
1	002987	Outlet valve	1
2	883028	Outlet valve seal 60X23.8X2.7	5
3	056932	Mechanic outlet valve anchors	1
4.1	021271	Protective plate >09	1
4.2	053424	Protective plate <09	1
5	011195	Base for protective box	1
6.1	026698	Protective box >09	1
6.2	002527	Protective box <09	1
7	033451	Lever block fixer	1
8	033450	Lever block	1
9	011150	Control plate fixers	2
10	021206	Stop valve	1
11	050997	Flexible hose 3/8 / 3/8 X 400	1
12	011978	Sanitarblock fixers	10
13	011977	Simflex fixers	1
14	021210	Fixation kit without frame	1
15	033449	Inlet valve support	1
16	021203	Inlet valve 3/8	1
17	021266	Flush pipe 56X360	1
18.1	021209	Flush pipe seal Ø40/45	5
18.2	037113	Flush pipe seal Ø45	5
19	021212	O-Ring Ø37	5
20	012001	Inlet valve membrane AZOR	1

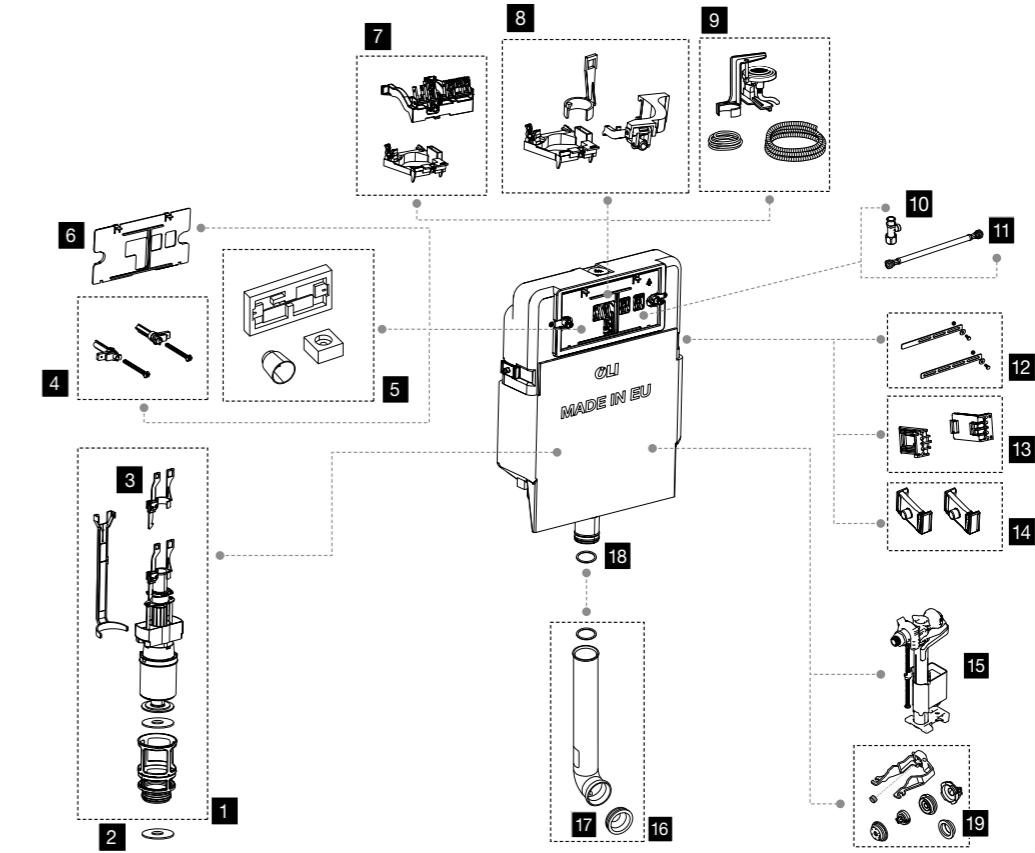


Nr.	Code	Description	Qt. Code
1	048681	Outlet valve	1
2	002997	Outlet valve seal	5
3	056932	Mechanic outlet valve anchors	1
4	037104	Fixation kit >99	1
5	021211	Protective box	1
6	037114	Protective plate	1
7	041637	Lever block	1
8	037117	Lever block <01	1
9	556801	Pneumatic block	1
10	021206	Stop valve	1
11	021270	Flexible hose 3/8 / 3/8 X 30	1
12	021210	Fixation kit without frame	1
13	011978	Sanitarblock fixers	10
14	011977	Simflex fixers	10
15	021203	Inlet valve 3/8	1
16	021266	Flush pipe 56X360	1
17.1	021209	Flush pipe seal Ø40/45	5
17.2	037113	Flush pipe seal Ø45	5
18	021212	O-Ring Ø37	5
19	012001	Inlet valve membrane AZOR	1

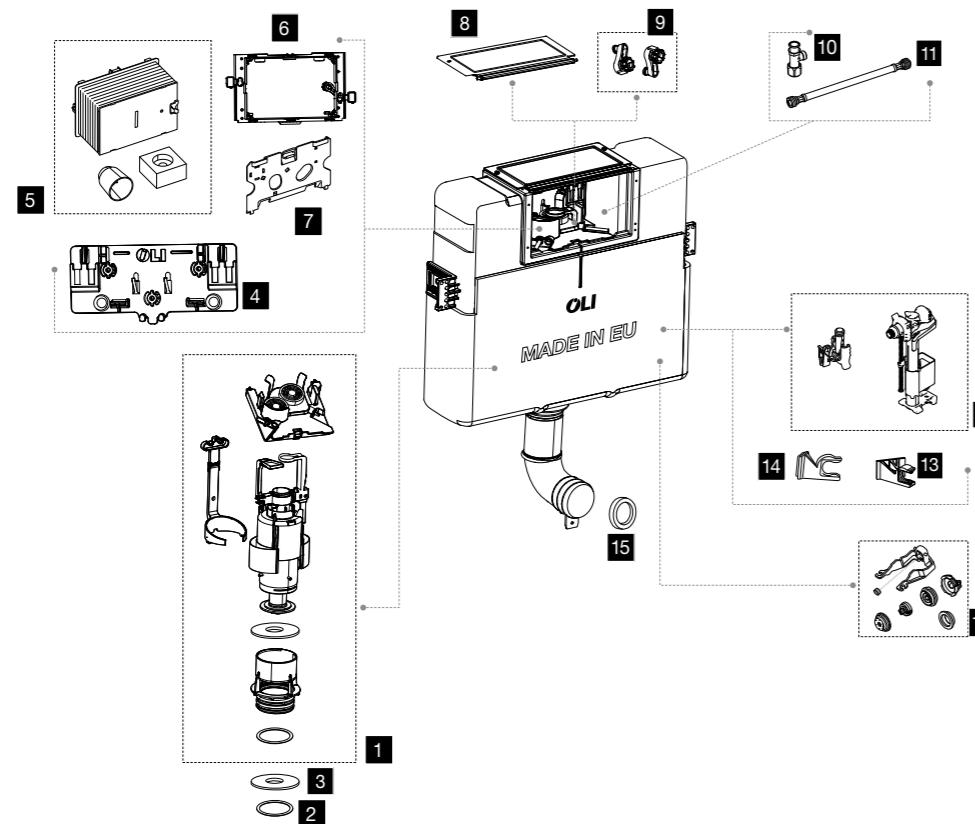


Nr.	Code	Description	Qt. Code
1	048288	Outlet valve	1
2	021212	O-Ring Ø37	1
3	883028	Outlet valve seal 60X23.8X2.7	5
4	033451	Lever block fixer	1
5	026698	Protective box >09	1
6	011195	Base for protective box	1
7	021271	Protective plate <09	1
8	041672	Protective top/front plate	1
9	011150	Control plate fixers	2
10	021206	Stop valve	1
11	050997	Flexible hose 3/8 / 3/8 X 400	1
12	021203	Inlet valve 3/8	1
13	037122	Corner inlet valve support	5
14	037123	Expert inlet valve support	5
15	037113	Flush pipe seal Ø45	1
16	012001	Inlet valve membrane AZOR	1


9Nr.	Code	Description	Qt. Code
1	883029	Double Outlet WC/URINAL/WASHBASIN	1
2	036886	Frame accessories kit M12	1
3	012196	Fixation kit for free standing frame	1
4	048974	Sanitarblock outlet bend support	1
5	011170	Simflex kit water connections	1
6	036888	Outlet bend 90x90	1
7	054576	Outlet bend 50	1
8	622301	White fixation kit	1

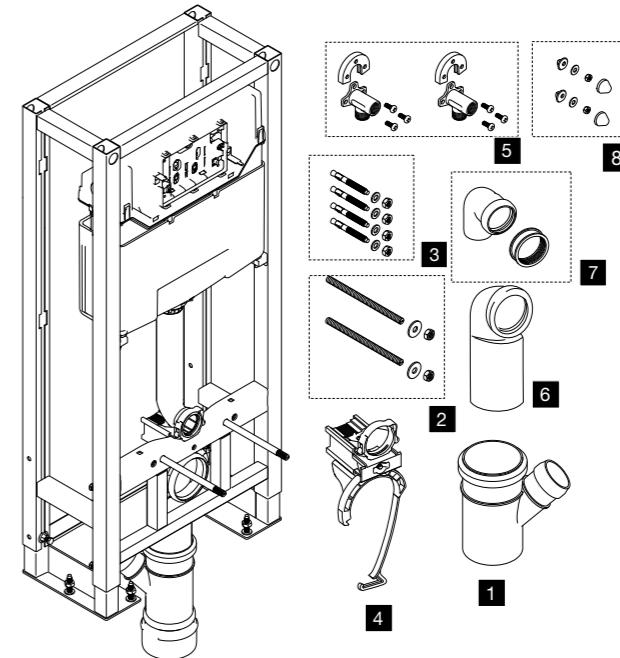

FRAMES

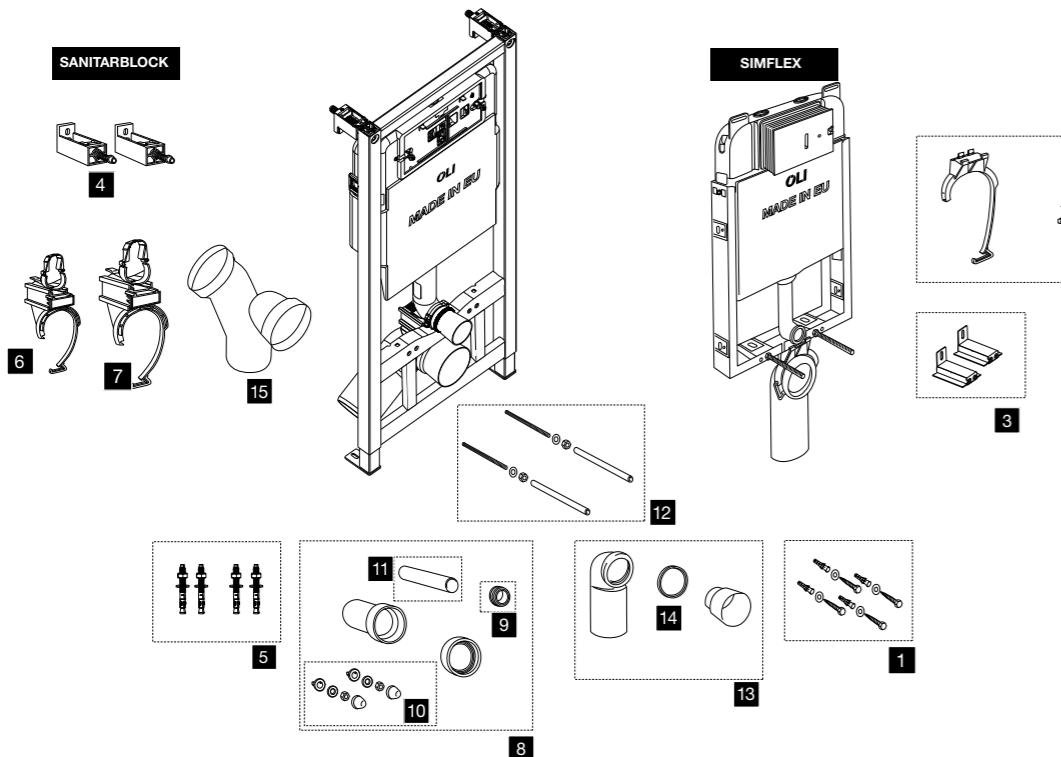


SHOWER FRAME

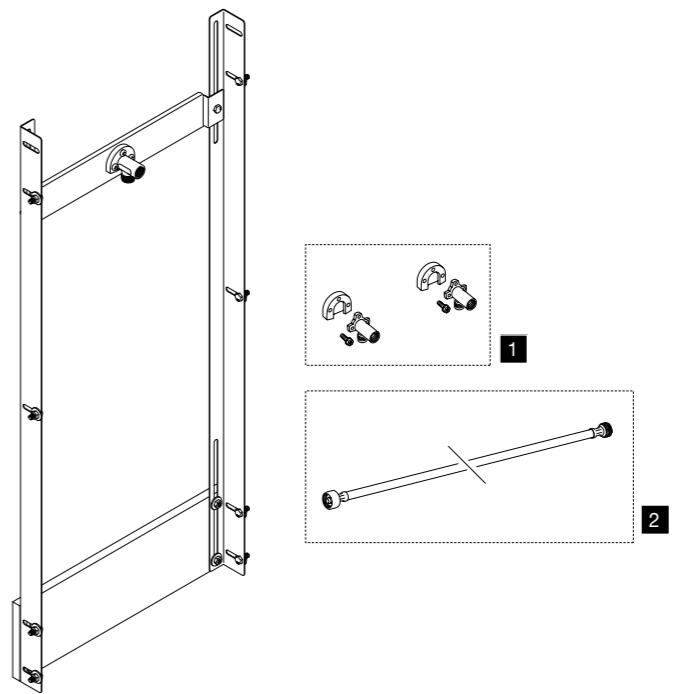

Nr.	Code	Description	Qt. Code
1	011170	Simflex kit water connections	2
2	880632	Flexible hose 1/2MX1/2F 1000	1


Nr.	Code	Description	Qt. Code
1	037148	Fixation screws	4
2	37145	Flush pipe support Simflex outlet bend support	1
3.1	034899	Fixation kit for simflex frame 120mm	2
3.2	034898	Fixation kit for simflex frame 80mm	2
4.1	054389	Fast fixation kit 144mm	2
4.2	004252	Fast fixation kit 181mm	2
5	012196	Fixation kit for free-standing frame	4
6	048974	Sanitarblock outlet bend support	1
7	195524	Sanitarblock S90 outlet bend support	1
8	037137	Connection pipes Ø45 Ø90	1
9.1	037133	Rubber seal Ø45	5
9.2	050992	Rubber seal Ø40	5
9.3	050993	Rubber seal Ø32	5
10.1	622301	White fixation kit	1
10.2	622303	Chrome fixation kit	1
11	037132	Flush pipe adaptor Ø45X180	1
12	036886	Frame accessories kit M12	2
13.1	036888	Outlet bend Ø90X90	1
13.2	053995	Outlet bend Ø90X110	1
14	036889	Rubber seal Ø90 outlet bend	5
15	111238	Double Outlet Bend 110	1

WC FRAME FOR FLUSH VALVE

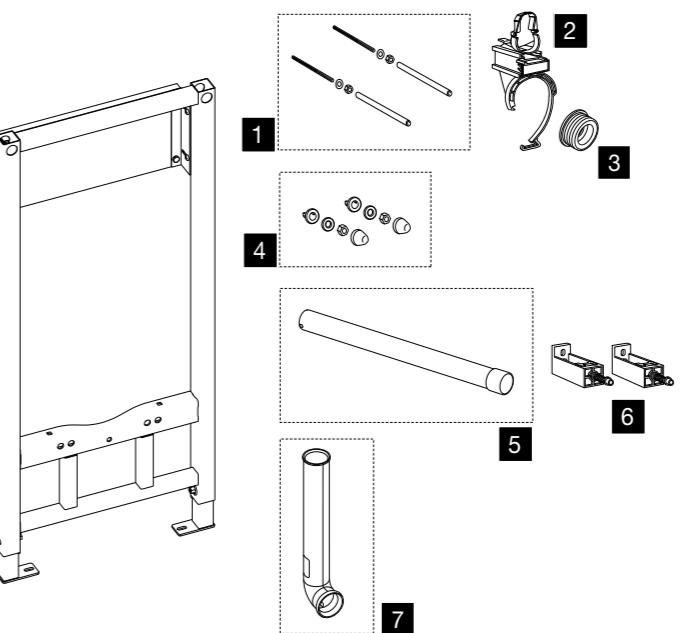


Nr.	Code	Description	Qt. Code
1	036886	Frame accessories kit M12	1
2	048974	Sanitarblock outlet bend support	1
3	880626	Rubber seal Ø50	1
4.1	622301	White fixation kit	1
4.2	622303	Chrome fixation kit	1
5	880627	Flush pipe Ø32 400	1
6	054389	Fast fixation kit 144mm	2
7	021266	Flush pipe 56X360	1

4 WC FIXATION POINTS

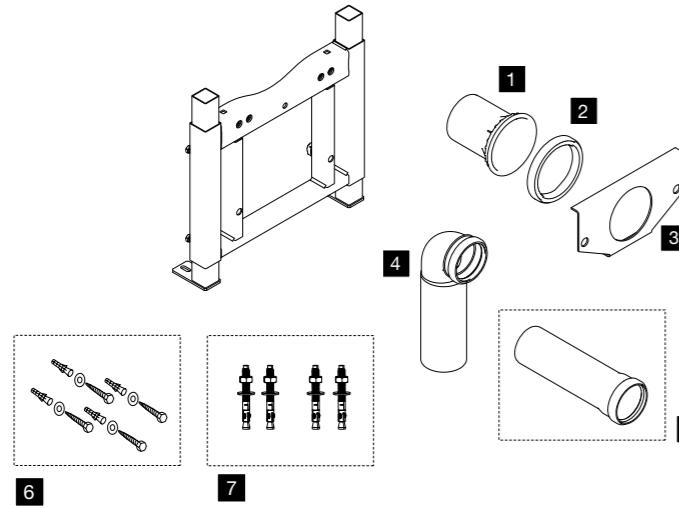


Nr.	Code	Description	Qt. Code
1	878868	WC connection pipe Ø90X120	1
2	878876	Rubber seal Ø126X15	1
3	878879	Steel sheet WC 4 fix	1
4	036888	Outlet bend Ø90X90	1
5	879174	Connecting pipe 250x90x90	1
6	037148	Fixation screws	4
7	012196	Fixation kit for free-standing frame	4

FRAMES BIDET/WAHSBASIN

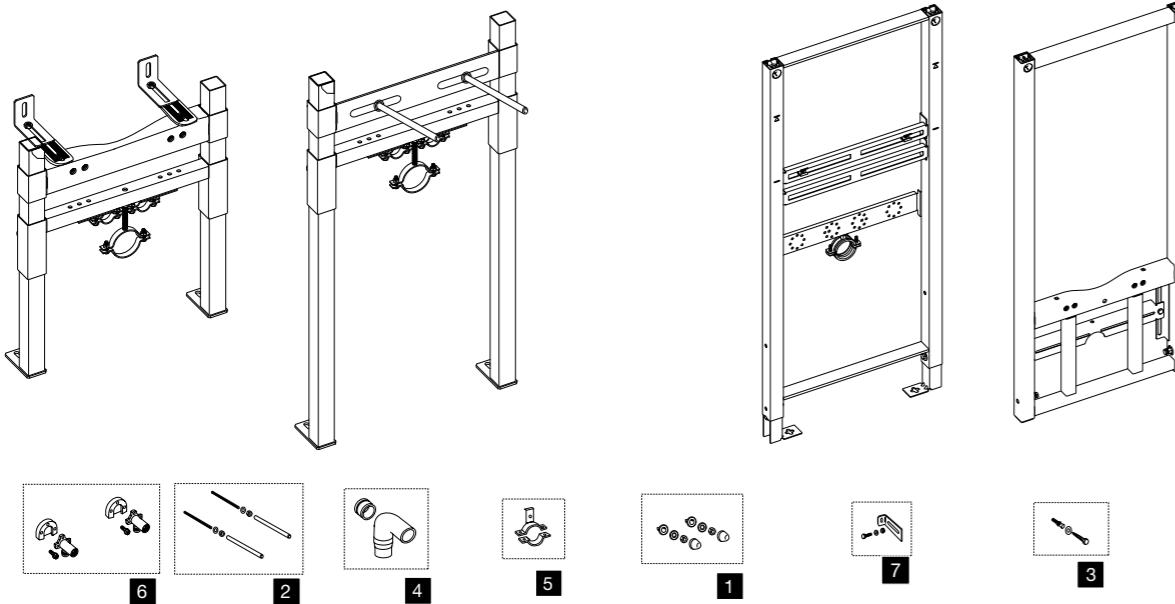


Nr.	Code	Description	Qt. Code
1.1	622301	White fixation kit	1
1.2	622303	Chrome fixation kit	1
2	036886	Frame accessories kit M12	2
3	037148	Fixation screws	4
4	054576	Outlet bend Ø50	1
5	037144	Metal support for BIDET Simflex	1
6	011170	Simflex kit water connections	2
7	054577	Kit BIDET/WASHBASIN 120mm	2

ECO URINAL FRAME

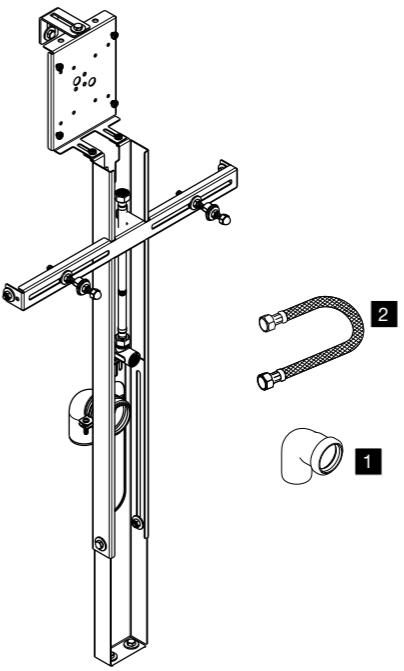


Nr.	Code	Description	Qt. Code
1	878901	Outlet bend 50x50	1
2	878900	Flexible hose 1/2x1/2 F/F 300	1

MOON

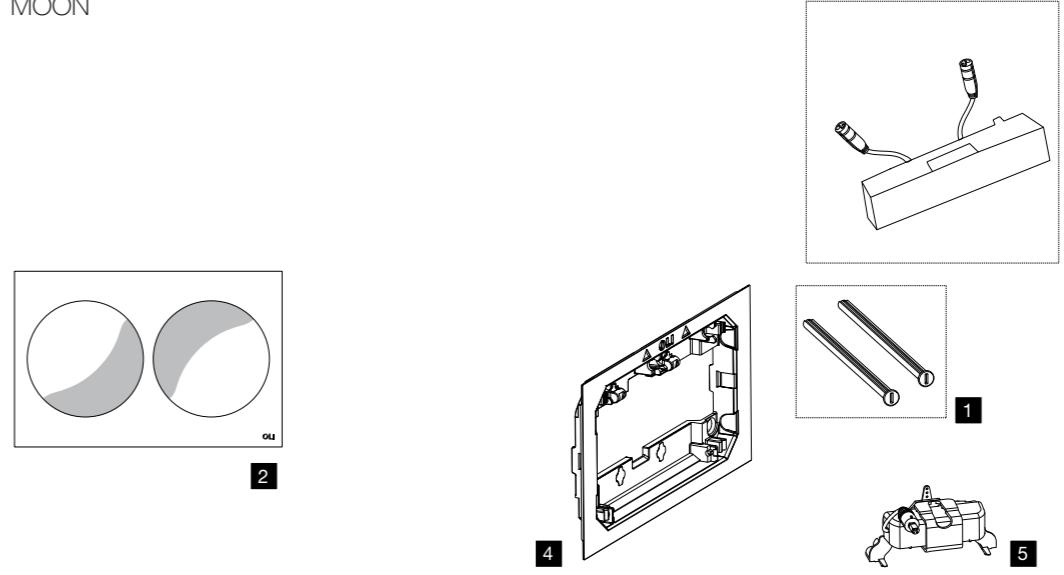


Nr.	Code	Description	Qt. Code
1	053897	Plate fixation screws	2
2.1	074736	MOON White frontal plate	1
2.2	879078	MOON Black frontal plate	1
3	878680	Cap sensor	1
4	879208	Counter Plate	1
5	878681	Servomotor block	1

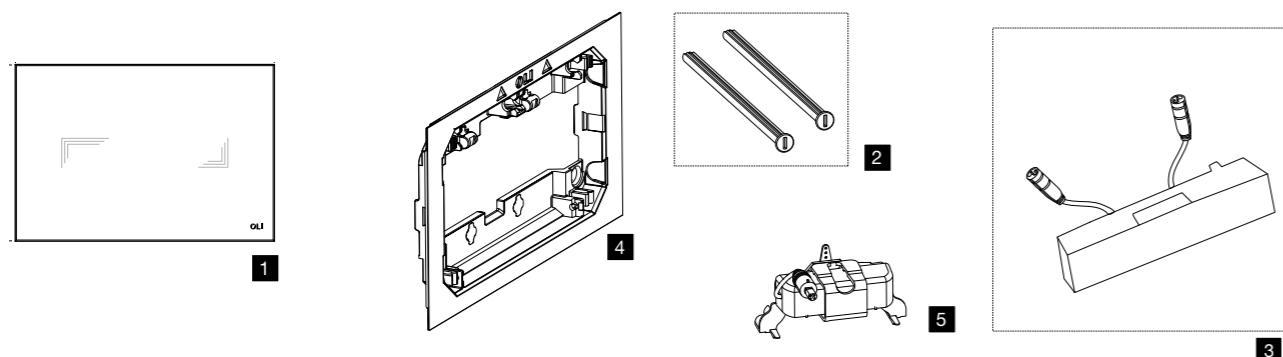


Nr.	Code	Description	Qt. Code
1.1	879181	TRIBE frontal plate Gold	1
1.2	879182	TRIBE frontal plate Black	1
1.3	879183	TRIBE frontal plate White	1
1.4	879184	TRIBE frontal plate Red	1
1.5	879185	TRIBE frontal plate Anthracite	1
1.6	879186	TRIBE frontal plate Taupe	1
2	053897	Plate fixation screws	2
3	878680	Cap sensor	1
4	879208	Counter Plate	1
5	878681	Servomotor block	1

GLASSY

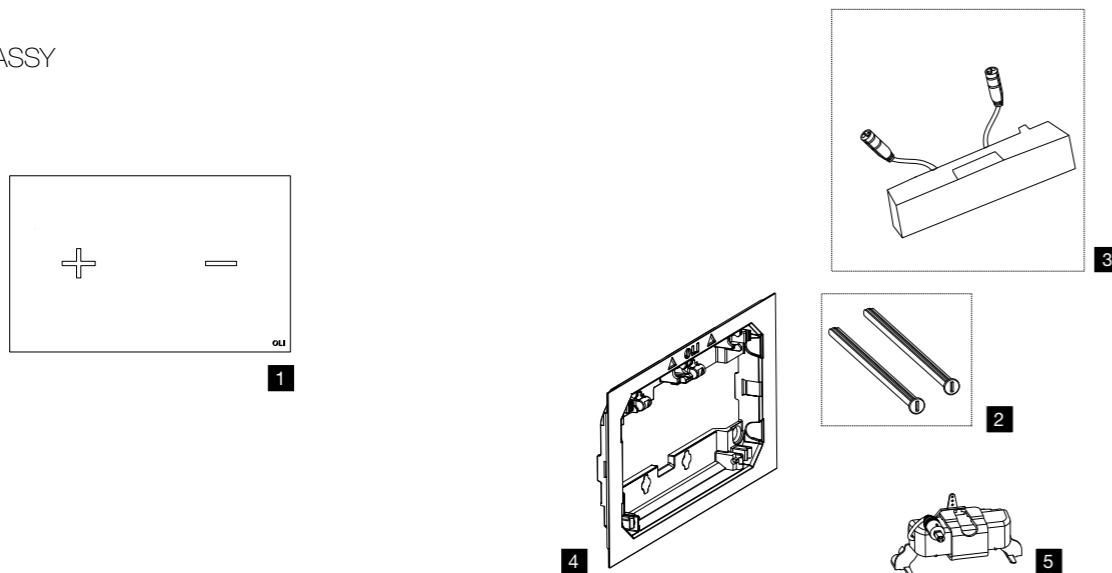


Nr.	Code	Description	Qt. Code
1.1	878853	GLASSY frontal plate Gold	1
1.2	878854	GLASSY frontal plate Taupe	1
1.3	878855	GLASSY frontal plate Anthracite	1
1.4	878856	GLASSY frontal plate Red	1
1.5	084297	GLASSY frontal plate White	1
1.6	084298	GLASSY frontal plate Black	1
2	053897	Plate fixation screws	2
3	878680	Cap sensor	1
4	879208	Counter Plate	1
5	878681	Servomotor block	1

TRUMPET

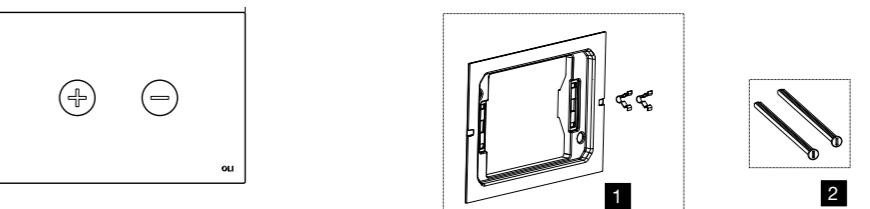


Nr.	Code	Description	Qt. Code
1	090446	Counter plate	1
2	053897	Plate fixation screws	2

SM15


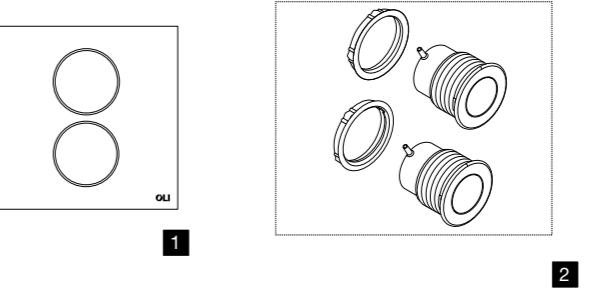


Nr.	Code	Description	Qt. Code
1	056980	SM15 front plate	1
2	056982	Pneumatic push button	2

INO-X


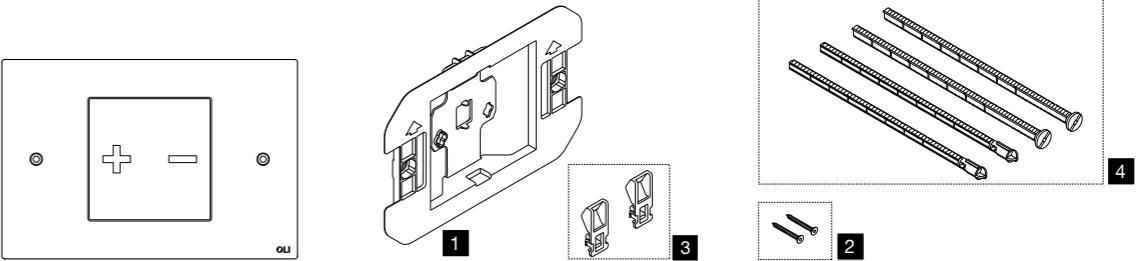


Nr.	Code	Description	Qt. Code
1	010088	Counter plate	1
2	058424	Stainless steel screw M4 X 25	2
3	049963	Outlet valve extension kit	10
4	049962	Screws for fixation and actuation	4

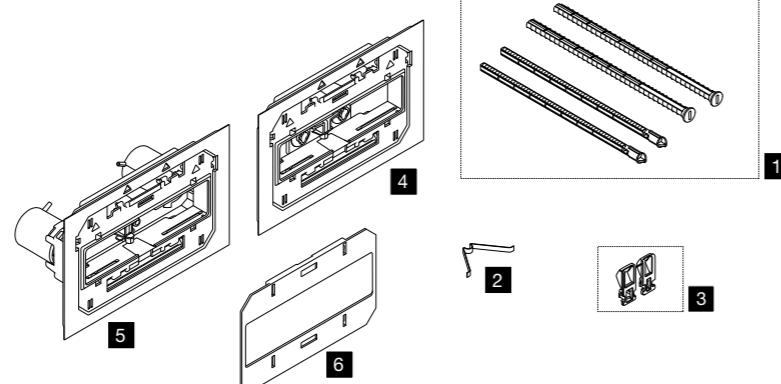



Nr.	Code	Description	Qt. Code
1	131989	Control plate actuation and fixation screws	4
2	053865	Springs	10
3	049963	Outlet valve extension kit	10
4	053868	Mechanic counter plate	1
5	053869	Pneumatic counter plate	1
6	053871	Base	1

BLINK

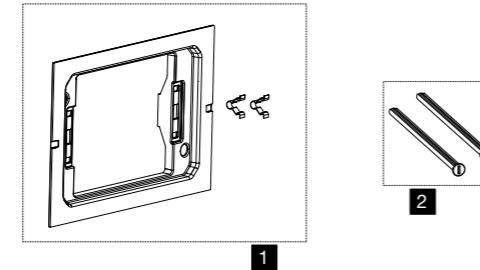



Nr.	Code	Description	Qt. Code
1	090446	Counter plate	1
2	053897	Plate fixation screws	2

KARISMA

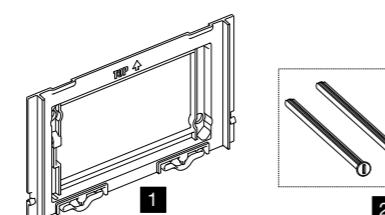



Nr.	Code	Description	Qt. Code
1	880699	Counter plate	1
2	053897	Plate fixation screws	2

SALINA

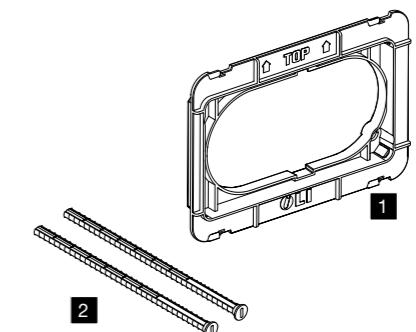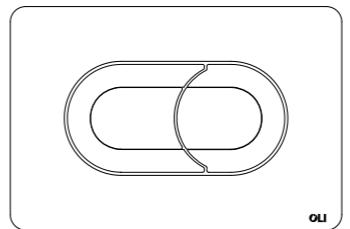



Nr.	Code	Description	Qt. Code
1	879603	Counter plate	1
2	053897	Plate fixation screws	2

TREND

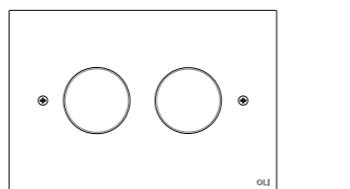


Nr.	Code	Description	Qt. Code
1	056982	Pneumatic push button	2
2	058424	Stainless steel screw M4 X 25	2
3	011191	Plate fixation screws	2

MINI TREND




Nr.	Code	Description	Qt. Code
1	056982	Pneumatic push button	2
2	058424	Stainless steel screw M4 X 25	2


GLOBE

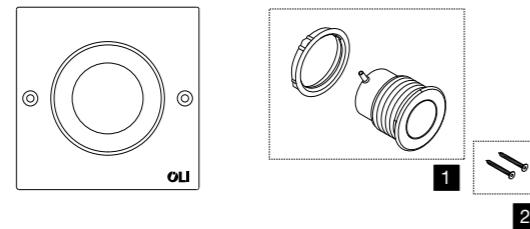



Nr.	Code	Description	Qt. Code
1	056982	Pneumatic push button	2
2	058424	Stainless steel screw M4 X 25	2

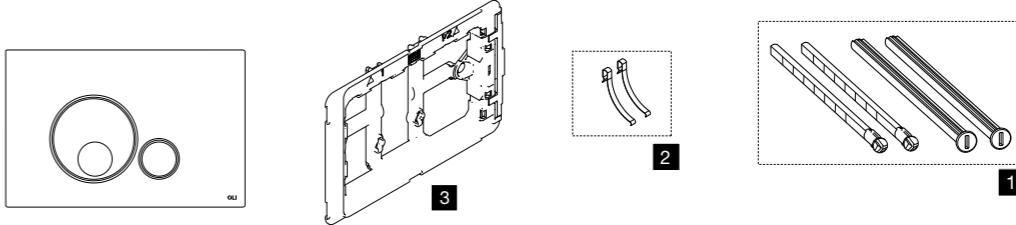

SEAMLESS

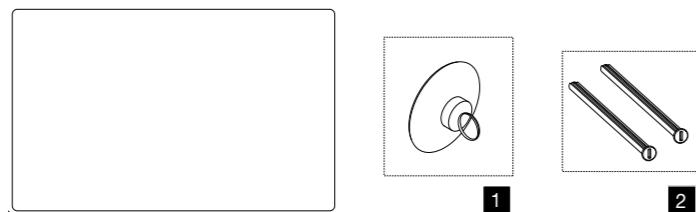


Nr.	Code	Description	Qt. Code
1	880631	Suction Cup	1
2	053897	Plate fixation screws	2

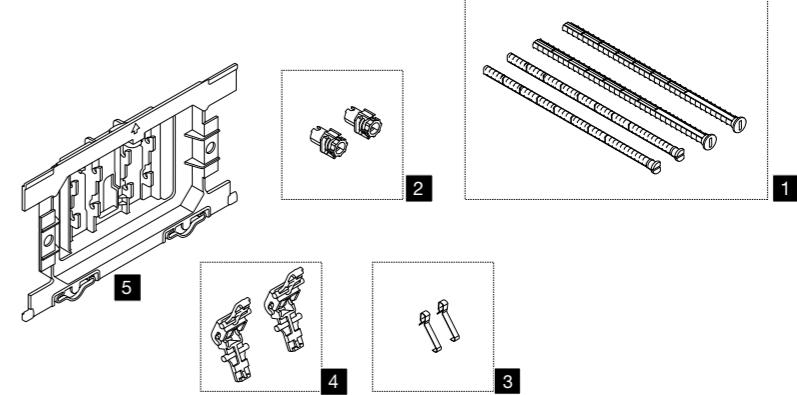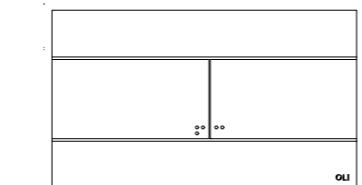

Nr.	Code	Description	Qt. Code
1	131989	Control plate actuation and fixation screws	4
2	011986	Springs	10
3	069205	Counter plate	1


SLIM

Nr.	Code	Description	Qt. Code
1	037150	Control plate actuation and fixation screws	4
2	037152	Fixation kit <09	2
3	011986	Springs	10
4	011637	Lever set	2
5	041673	Counter plate >09	1

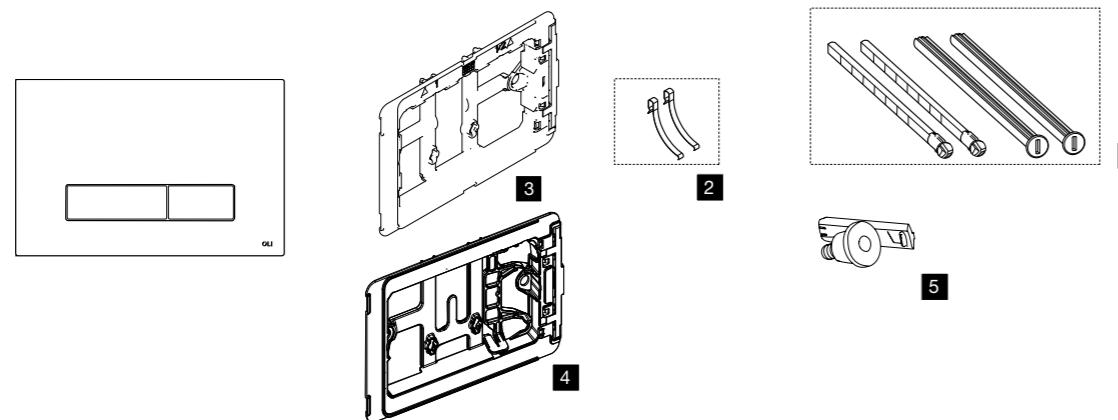


Nr.	Code	Description	Qt. Code
1	131989	Control plate actuation and fixation screws	4
2	011986	Springs	10
3	069205	Counter plate	1
4	181715	Counter plate OLIpure	1
5	181716	OLIpure nozzle	1

PLAIN

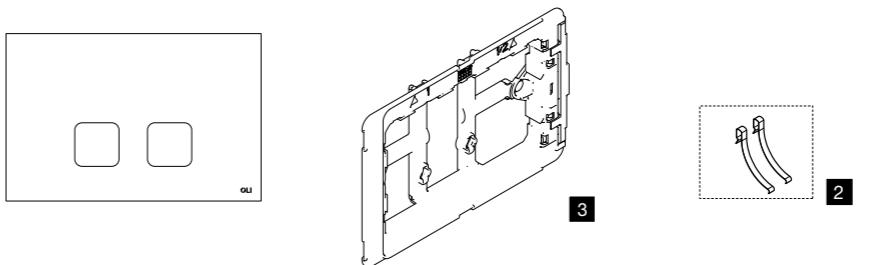


Nr.	Code	Description	Qt. Code
1	131989	Control plate actuation and fixation screws	4
2	011986	Springs	10
3	069205	Counter plate	1

NARROW

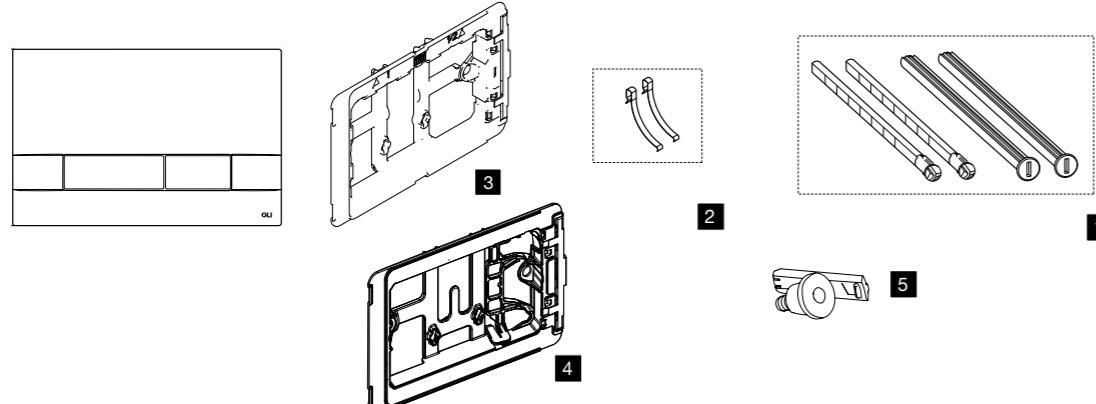


Nr.	Code	Description	Qt. Code
1	131989	Control plate actuation and fixation screws	4
2	011986	Springs	10
3	069205	Counter plate	1
4	181715	Counter plate OLIpure	1
5	181716	OLIpure nozzle	1


IPLATE

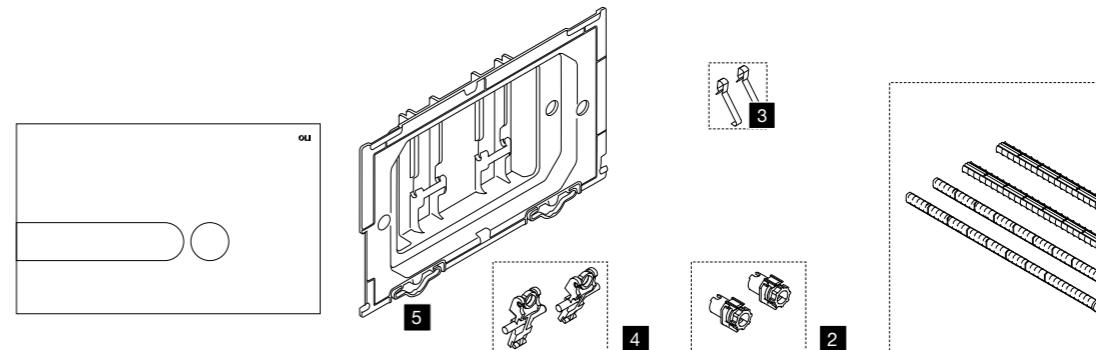

Nr.	Code	Description	Qt. Code
1	037150	Control plate actuation and fixation screws	4
2	037152	Fixation kit <09	2
3	011986	Springs	10
4	041693	Lever set	2
5	041691	Counter plate	1

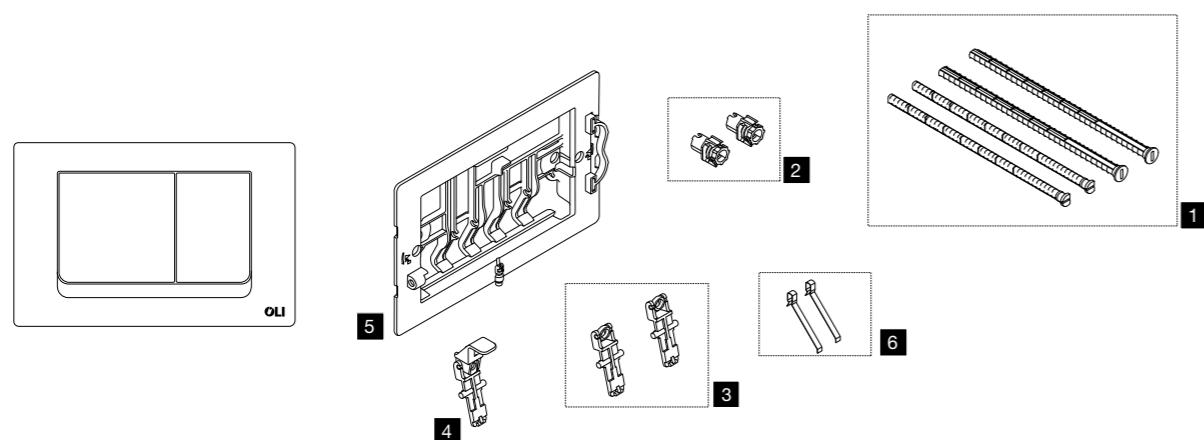


Nr.	Code	Description	Qt.	Code
1	037150	Control plate actuation and fixation screws	4	
2	037152	Fixation kit <09	2	
3	056676	Lever set	2	
4	041687	Lever set stop	1	
5	041676	Counter plate >09	1	
6	041682	Springs	10	

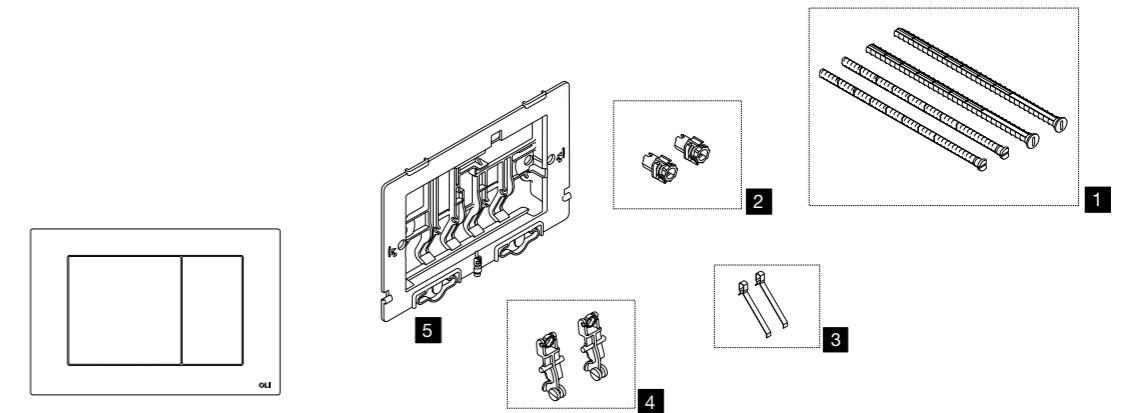


Nr.	Code	Description	Qt.	Code
1	037150	Control plate actuation and fixation screws	4	
2	037152	Fixation kit <09	2	
3	041682	Springs	10	
4	037303	Lever set	2	
5	041689	Counter plate >09	1	


RIVER

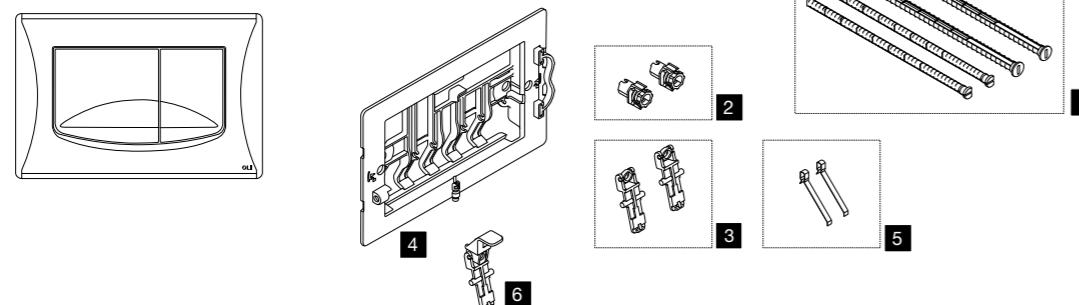

Nr.	Code	Description	Qt.	Code
1	037150	Control plate actuation and fixation screws	4	
2	037152	Fixation kit <09	2	
3	056676	Lever set	2	
4	041676	Counter plate >09	1	
5	041682	Springs	10	
6	041687	Lever set stop	1	

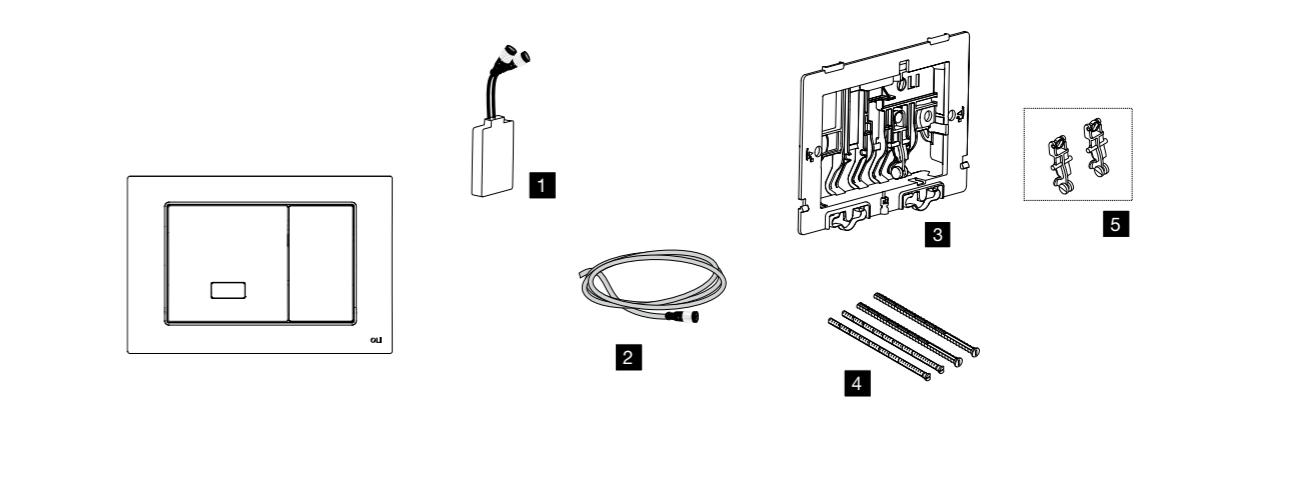


Nr.	Code	Description	Qt.	Code
1	182912	Sensor	1	
2	182914	Power cable	1	
3	041689	Counter plate	1	
4	037150	Control plate actuation and fixation screws	2	
5	037303	Lever set	1	


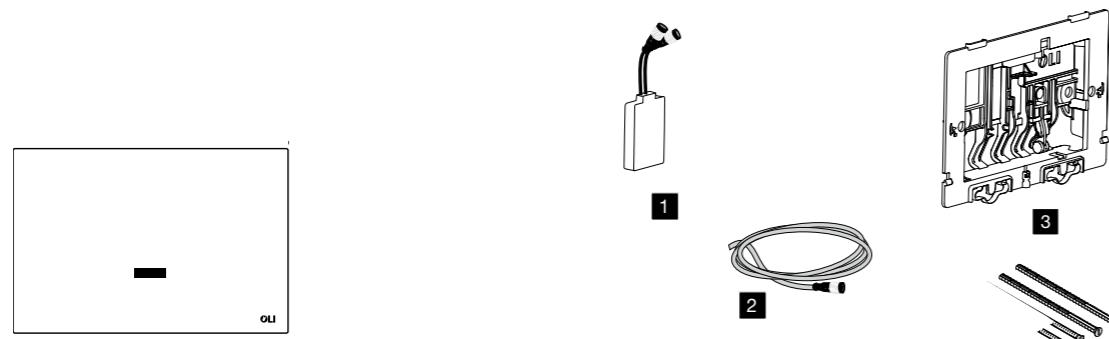


Nr.	Code	Description	Qt. Code
1	182912	Sensor	1
2	182914	Power cable	1
3	041689	Counter plate	1
4	053897	Plate fixation screws	2

ELECTRA I

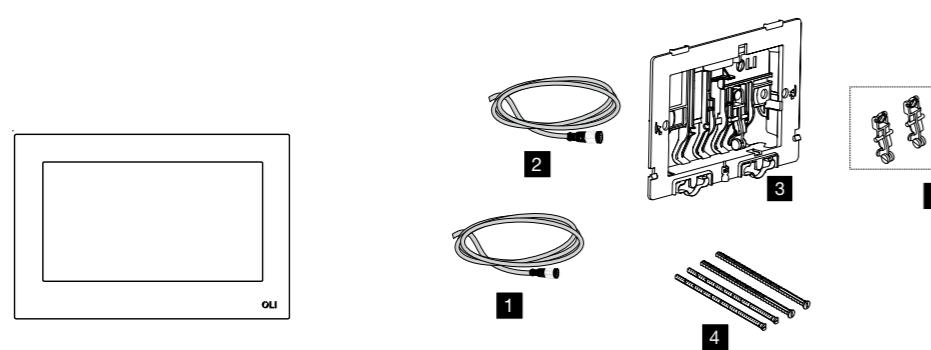


Nr.	Code	Description	Qt. Code
1	182914	Power cable	1
2	183025	Remote control cable	1
3	041689	Counter plate	1
4	037150	Control plate actuation and fixation screws	2
5	037303	Lever set	1




Nr.	Code	Description	Qt. Code
1	054723	SM15 Urinal front plate	1
2	056982	Pneumatic push button	2


eAQUA URINAL

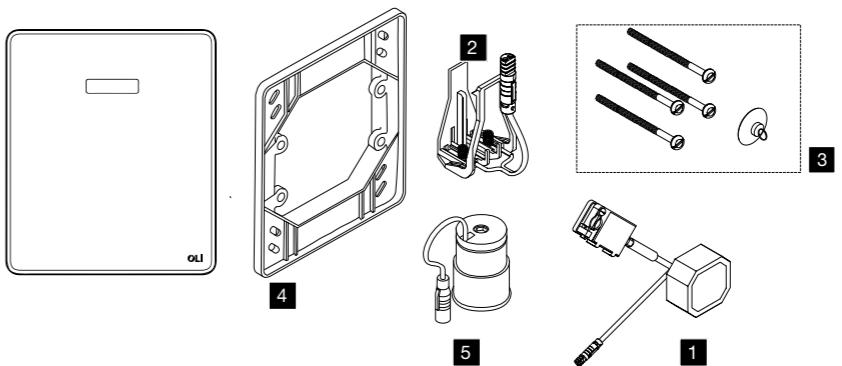

Nr.	Code	Description	Qt. Code
1	879134	Concealed mains power supply 230VAC/6VDC	1
2	879133	Battery holder	1
3	879132	Fixation screws and suction cup	4
4	879131	Counter plate	1
5	879128	Electrovalve 6V/3W	1

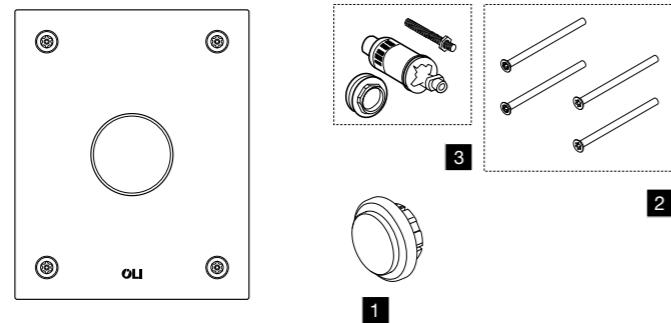


Nr.	Code	Description	Qt. Code
1	883024	BLINK Urinal button	1
2	883022	BLINK Urinal screws	1
3	878916	Fluxometer cartridge + actuation screw + nut	1

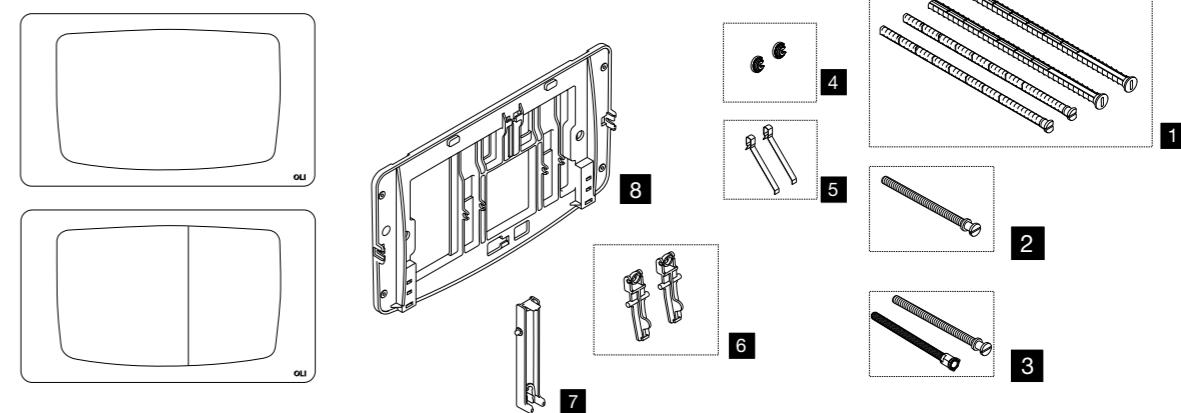


Nr.	Code	Description	Qt. Code
1	037150	Control plate actuation and fixation screws	4
2	049975	Actuation screws single flush	10
3	036921	Actuation screws single flush and prolongation	2
4	056973	Fixation washer <12	2
5	058833	Springs	10
6	037578	Lever set	2
7	054594	Start/stop control plate lever	1
8	049983	Counter plate	1


GLOBE URINAL

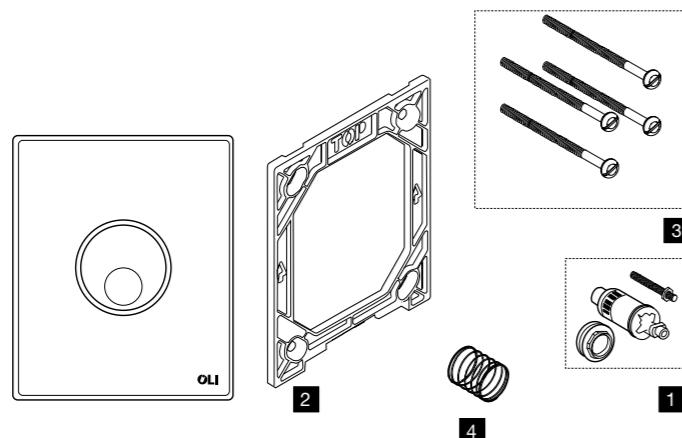

Nr.	Code	Description	Qt. Code
1	878916	Fluxometer cartridge + actuation screw + nut	1
2	878917	Counter plate	1
3	878918	Fixation screws	4
4	878919	Spring	1

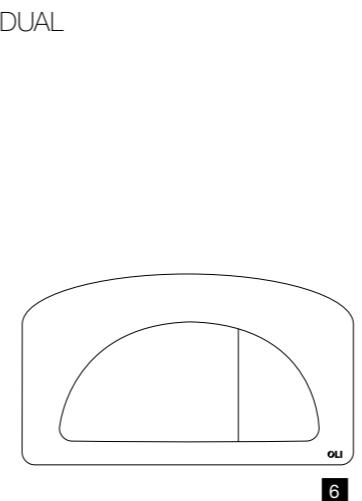


Nr.	Code	Description	Qt. Code
1	037150	Control plate actuation and fixation screws	4
2	056973	Fixation washer <12	2
3	011986	Springs	10
4	049981	Counter plate	1
5	049985	Lever set	2
6.1	627001	White control plate	1
6.2	627004	Polished chrome control plate	1

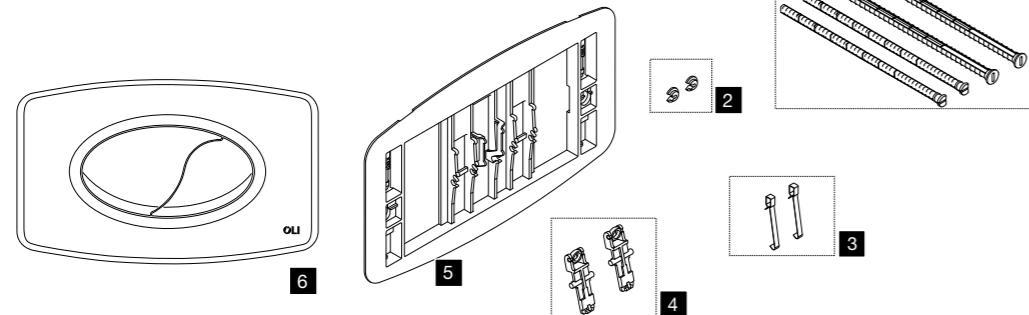


Nr.	Code	Description	Qt.	Code
1	037150	Control plate actuation and fixation screws	4	
2	056973	Fixation washer <12	2	
3	011986	Springs	10	
4	049985	Lever set	2	
5	049982	Counter plate	1	
6	635161	White control plate	1	

GIADA

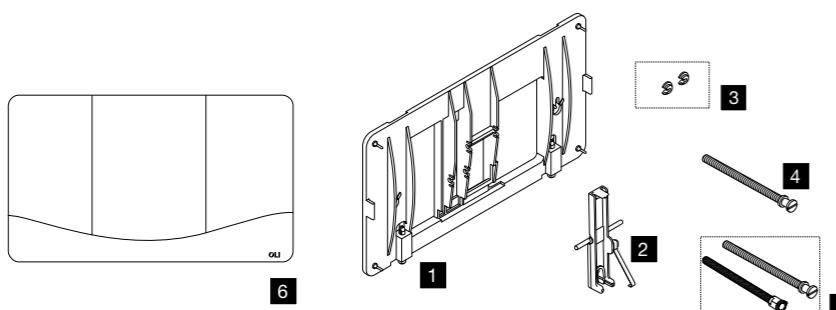

Nr.	Code	Description	Qt.	Code
1	009687	Counter plate	1	
2	049980	Lever set	1	
3	056973	Fixation washer <12	2	
4	049975	Actuation screws single flush	10	
5	036921	Actuation screws single flush and prolongation	1	
6	014861	White control plate	1	

DIAMANTE

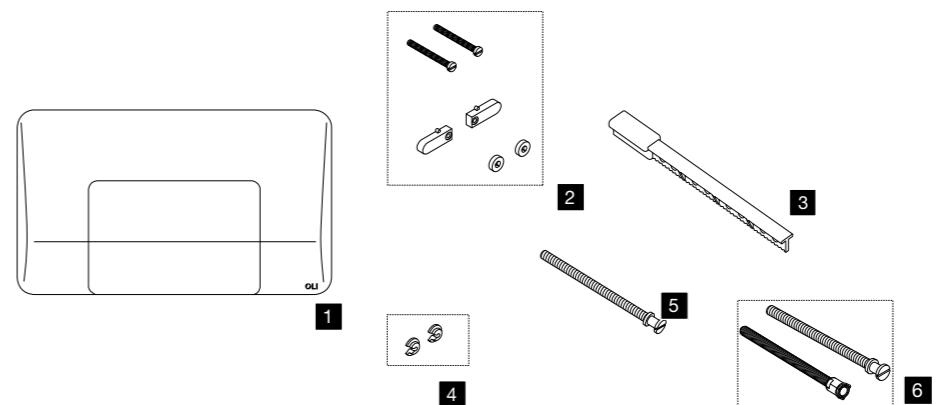


Nr.	Code	Description	Qt.	Code
1.1	050023	DIAMANTE control plate White	1	
1.2	050024	DIAMANTE control plate Chrome	1	
1.3	050226	DIAMANTE control plate Satin chrome	1	
2	015639	Fixation kit <99	1	
3	049971	Lever extension	10	
4	056973	Fixation washer <12	2	
5	049975	Actuation screws single flush	10	
6	036921	Actuation screws single flush and prolongation	1	

STREAM




Nr.	Code	Description	Qt.	Code
1.1	011602	Stream control plate Chrome	1	
1.2	011601	Stream control plate White	1	
2	054596	Springs	10	
3	053897	Plate fixation screws	2	

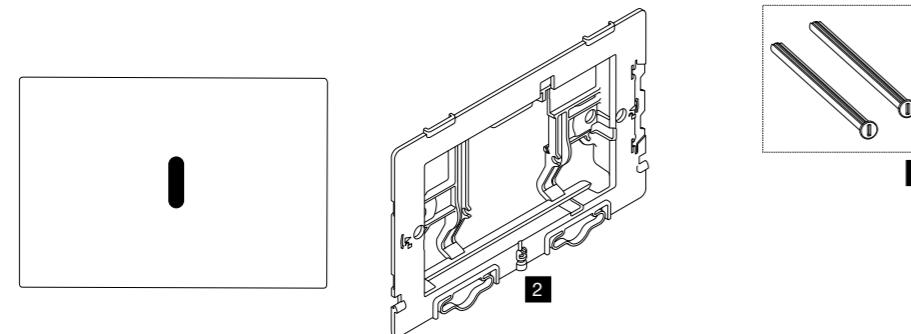


Nr.	Code	Description	Qt. Code
1	053897	Plate fixation screws	2
2	050202	Counter plate	2

URINAL




Nr.	Code	Description	Qt. Code
1	879140	Urinal complete set	1


ELECTRA URINAL

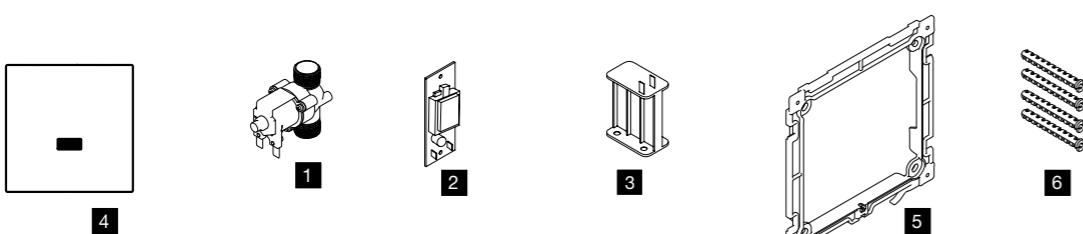


Nr.	Code	Description	Qt. Code
1	183026	Solenoid valve	1
2	183027	Controller	1
3	183035	Battery holder	1
4	183036	Control plate + sensor	1
5	183038	Counter plate	1
6	183040	Accessories	1

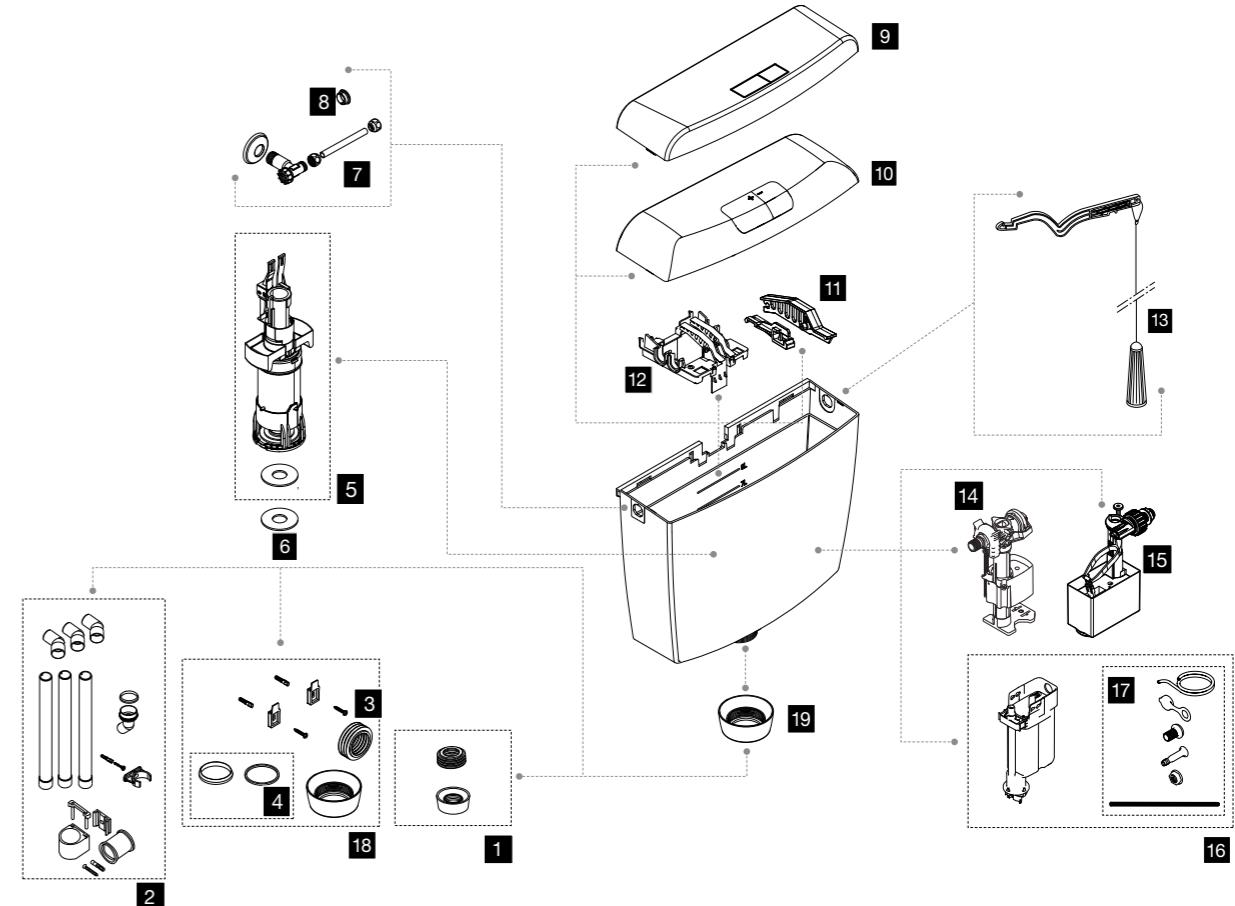


Nr.	Code	Description	Qt. Code
1	022389	Nut flush White Ø32	1
2	490882	Complete flush pipe Ø32	1
3.1	622803	Rubber seal Ø45	5
3.2	622802	Rubber seal Ø40	5
3.3	622801	Rubber seal Ø32	5
4	053386	Conical seal for flush pipe	1
5	525023	Outlet valve	1
6	883028	Outlet valve seal 60X23.8X2.7	5
7	030859	Stop valve ½X¾	1
8	049519	Side White cover	4
9	499323	IVORY DD White lid	1
10	154845	QUARZO White lid	1
11	092064	Anchors single flush	1
12	011995	Lever block	1
13	011998	Nylon chain	1
14	882653	Inlet valve ¾ OLIpure side	1
15	882504	Side inlet valve ¾	1
16	183049	OLIpure kit + accessories	1
17	183048	OLIpure accessories	1
18	883327	Nut flush White and accessories	1
19	030858	Nut flush White	1

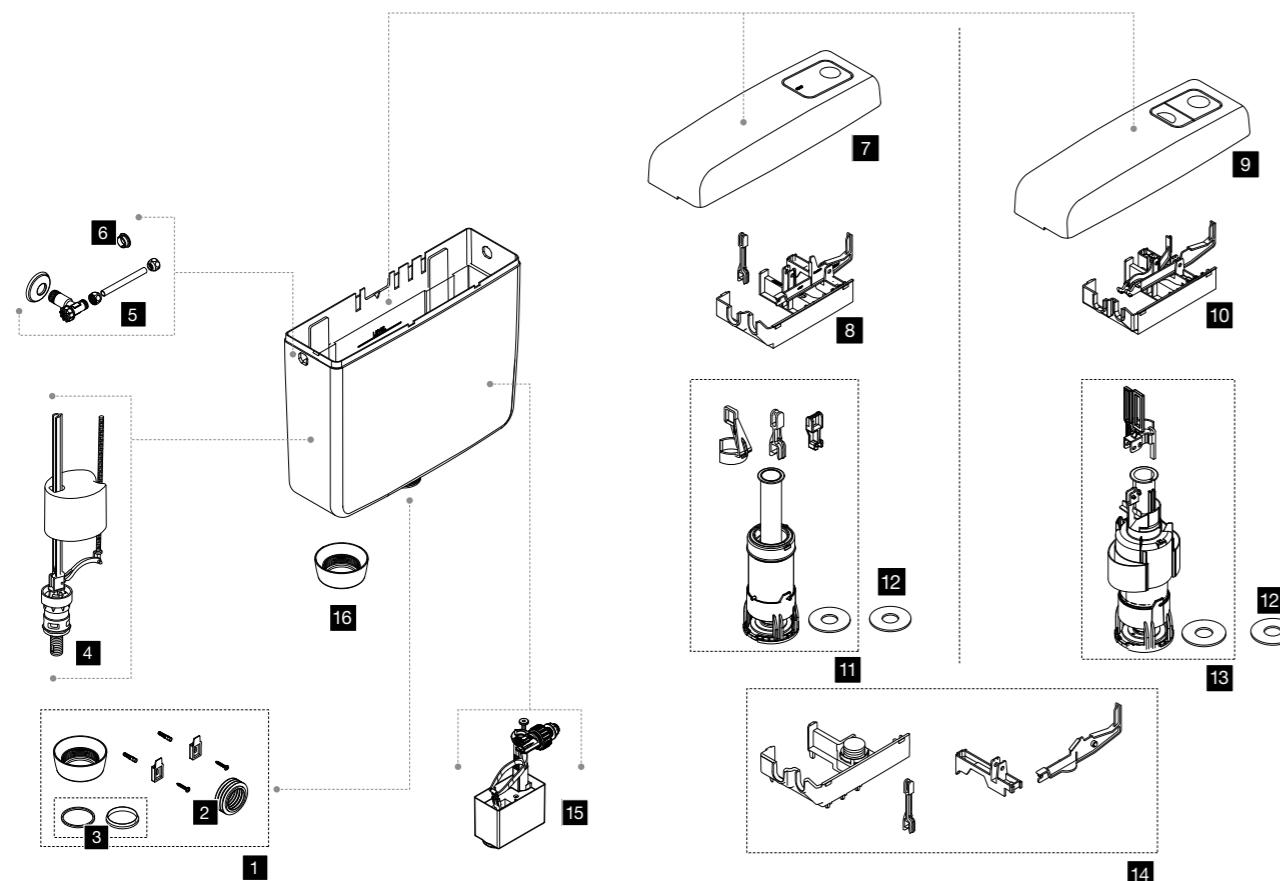


Nr.	Code	Description	Qt. Code
1	883327	Nut flush White and accessories	1
2.1	622803	Rubber seal Ø45	5
2.2	622802	Rubber seal Ø40	5
2.3	622801	Rubber seal Ø32	5
3	053386	Conical seal for flush pipe	1
4	563584	Inlet valve ¾ bottom	1
5	030859	Stop valve ½X%	1
6	049519	Side White cover	4
7	000464	TOPAZIO White start/stop lid	1
8	011990	Lever block interruptible flush	1
9	008590	TOPAZIO DD white lid	1
10	011988	Lever block dual flush	1
11	011989	Start/stop TOPAZIO outlet valve	1
12	883028	Outlet valve seal 60X23.8X2.7	5
13	525106	Outlet valve TOPAZIO DD	1
14	087617	Pneumatic block	1
15	882504	Side inlet valve ¾	10
16	030858	Nut flush White	1

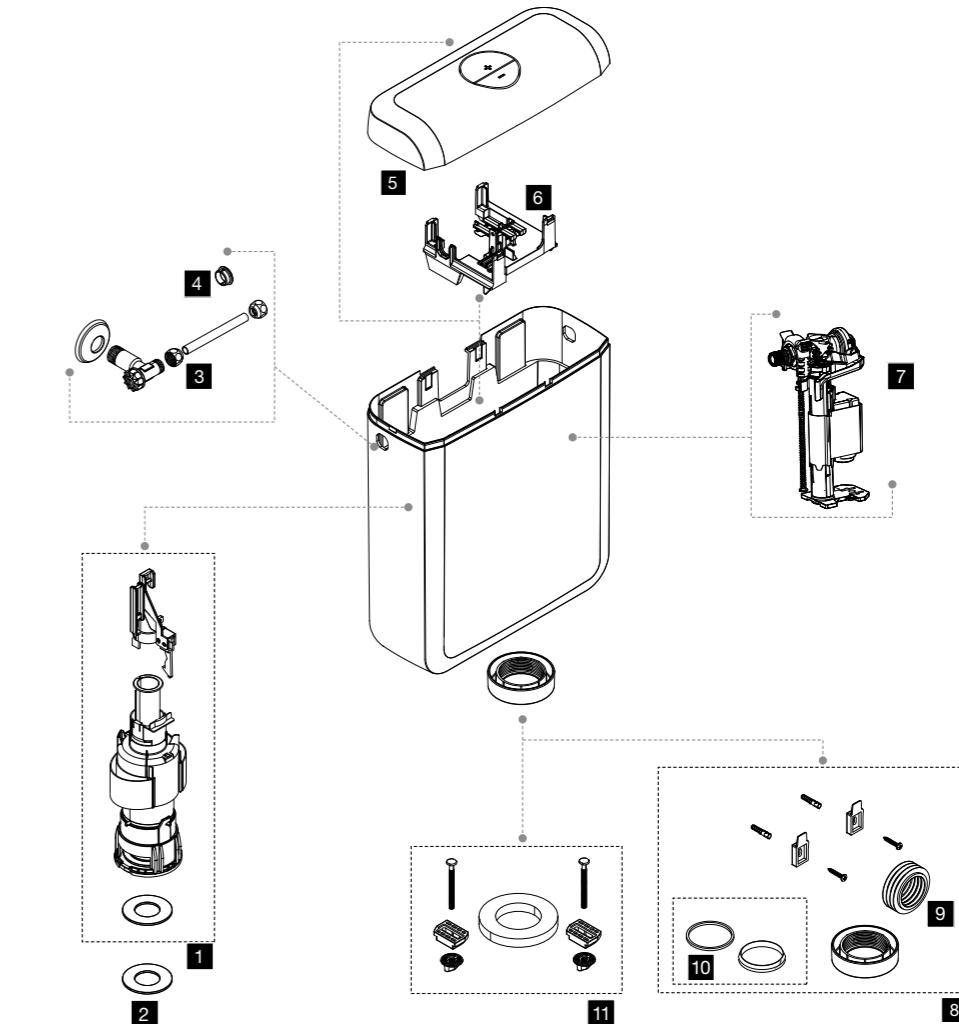


Nr.	Code	Description	Qt. Code
1	011698	Outlet valve	1
2.1	883028	Outlet valve seal 60X23.8X2.7	5
2.2	883174	ONIX seal outlet valve 63X32X2.7 <11	5
3	030859	Stop valve ½X%	1
4	049519	Side White cover	4
5	011697	ONIX LID	1
6	011987	Lever block	1
7	037182	Inlet valve ¾ ONIX PLUS	1
8	883339	Nut flush White and accessories	1
9.1	622803	Rubber seal Ø45	5
9.2	622802	Rubber seal Ø40	5
9.3	622801	Rubber seal Ø32	5
10	053386	Conical seal for flush pipe	1
11	037163	Accessories kit for close-coupled	1

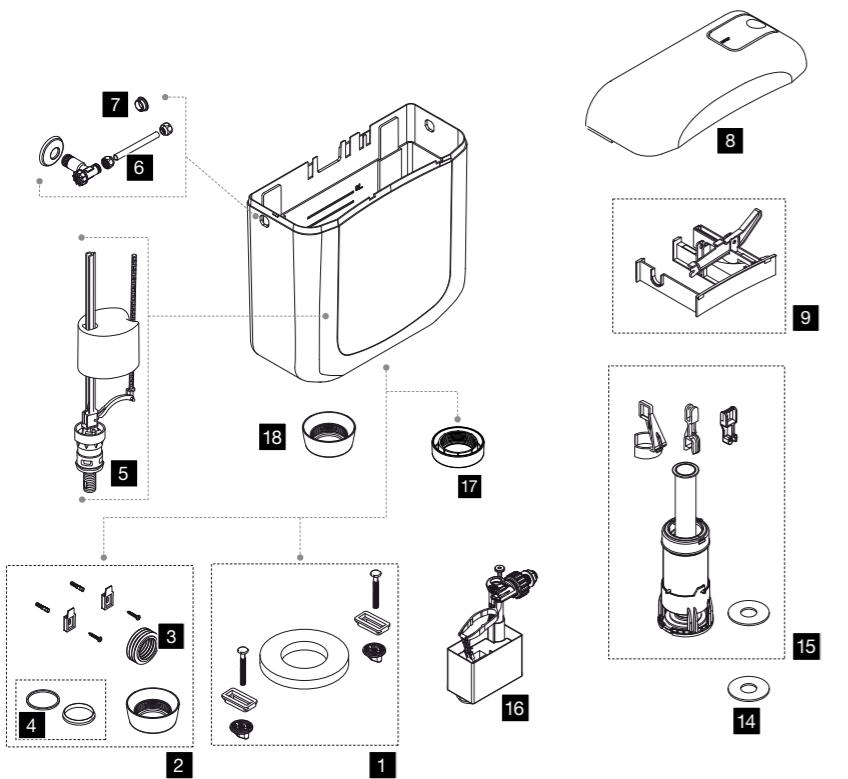


Nr.	Code	Description	Qt.	Code
1	049521	Accessories kit for close-coupled	1	
2	883327	Nut flush White and accessories < 18	1	
3.1	622803	Rubber seal Ø45	5	
3.2	622802	Rubber seal Ø40	5	
3.3.	622801	Rubber seal Ø32	5	
4	053386	Conical seal for flush pipe	1	
5	563584	Inlet valve ½ bottom	1	
6	030859	Stop valve ½X¾	1	
7	049519	Side White cover	4	
8	012936	ZAFFIRO White start/stop lid	1	
9	049524	Start/stop lever block	1	
10	008607	ZAFFIRO White lid dual flush	1	
11	011992	Dual flush lever block	1	
12	049948	Pneumatic outlet valve	1	
13	525106	Outlet valve TOPAZIO 2	1	
14	883028	Outlet valve seal 60X23.8X2.7	5	
15	011989	Start/stop TOPAZIO outlet valve	1	
16	011991	Side inlet valve ½	1	
17	883339	Nut flush White and accessories > 18	1	
18	030858	Nut flush White	1	

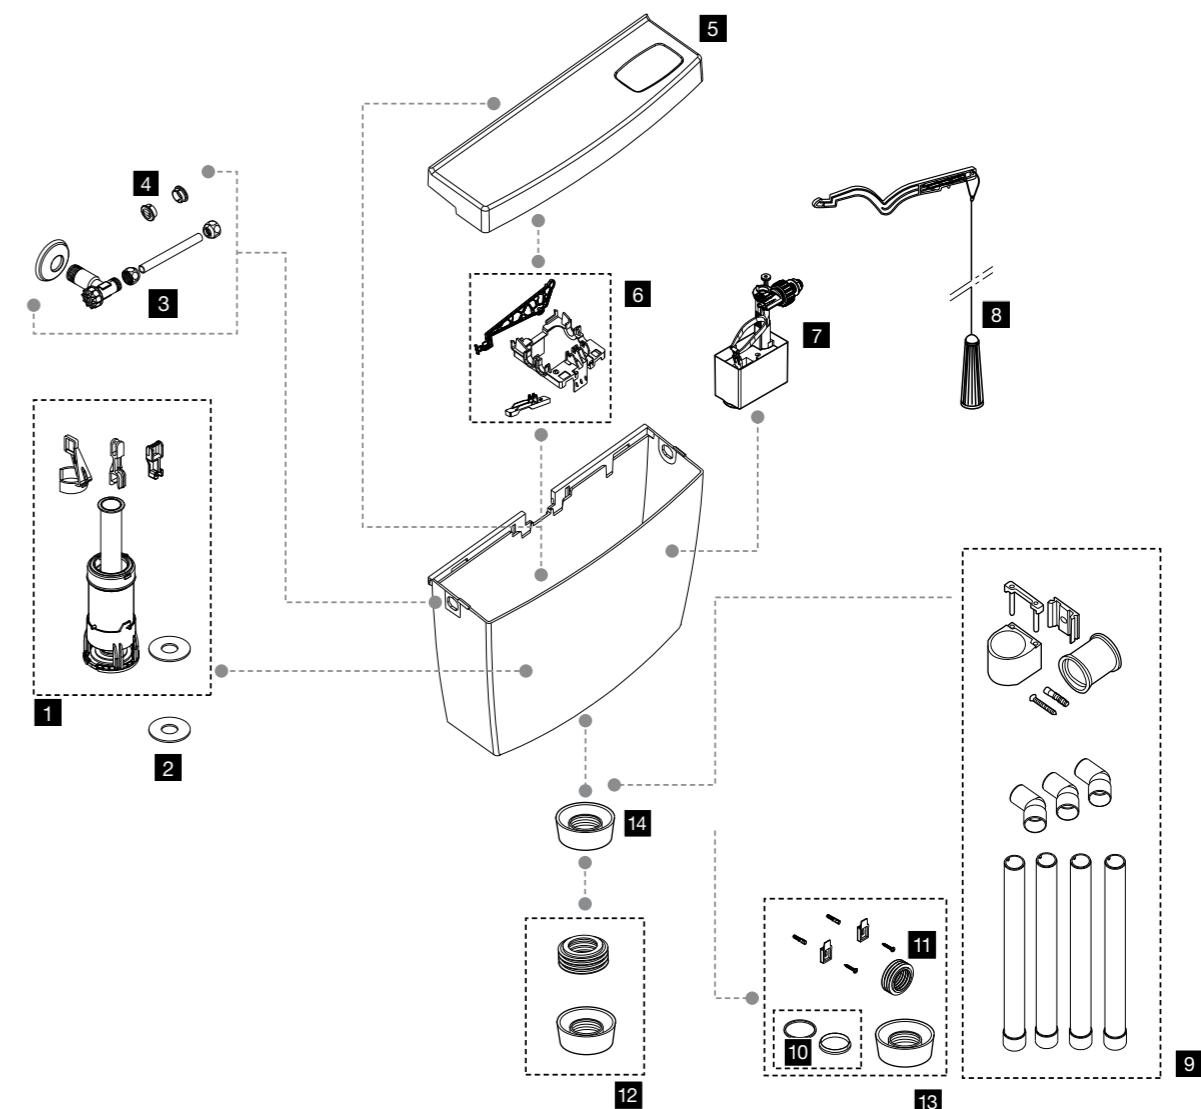

Nr.	Code	Description	Qt.	Code
1	011989	Start/stop TOPAZIO outlet valve	1	
2	883028	Outlet valve seal 60X23.8X2.7	5	
3	030859	Stop valve ½X¾	1	
4	049519	Side White cover	4	
5	011996	White lid	1	
6	011999	Lever block	1	
7	882504	Side inlet valve ½	1	
8	011998	Nylon chain	1	
9	490882	Complete flush pipe Ø32	1	
10	053386	Conical seal for flush pipe	1	
11.1	622803	Rubber seal Ø45	5	
11.2	622802	Rubber seal Ø40	5	
11.3	622801	Rubber seal Ø32	5	
12	022389	Nut flush White Ø32	1	
13	883327	Nut flush White and accessories	1	
14	030858	Nut flush White	1	

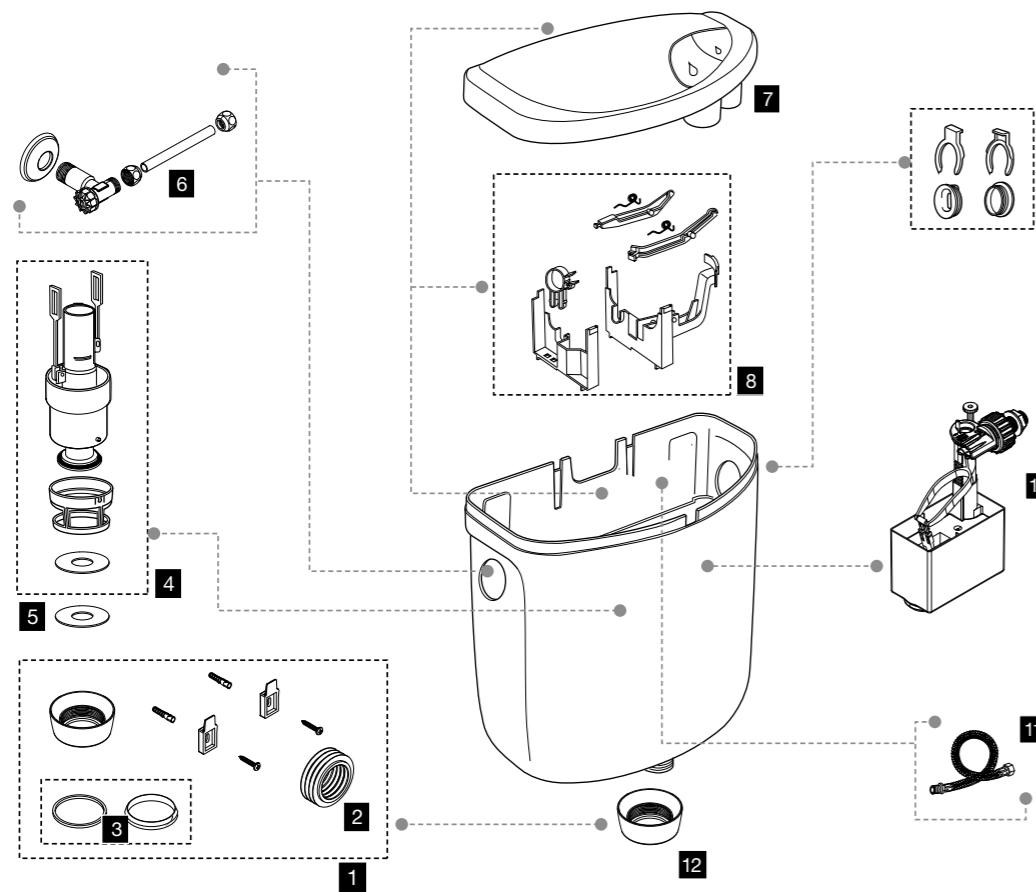


Nr.	Code	Description	Qt.	Code
1	883327	Nut flush White and accessories	1	
2.1	622803	Rubber seal Ø45	5	
2.2	622802	Rubber seal Ø40	5	
2.3	622801	Rubber seal Ø32	2	
3	053386	Conical seal for flush pipe	1	
4	034173	Outlet valve	1	
5	037188	Outlet valve seal	10	
6	030859	Stop valve ½X%	1	
7	013140	HAVANA White lid	1	
8	028379	Lever block	5	
9	037194	Side White cover	5	
10	882504	Side inlet valve %	5	
11	037191	Flexible hose %X%	1	
12	030858	Nut flush White	1	

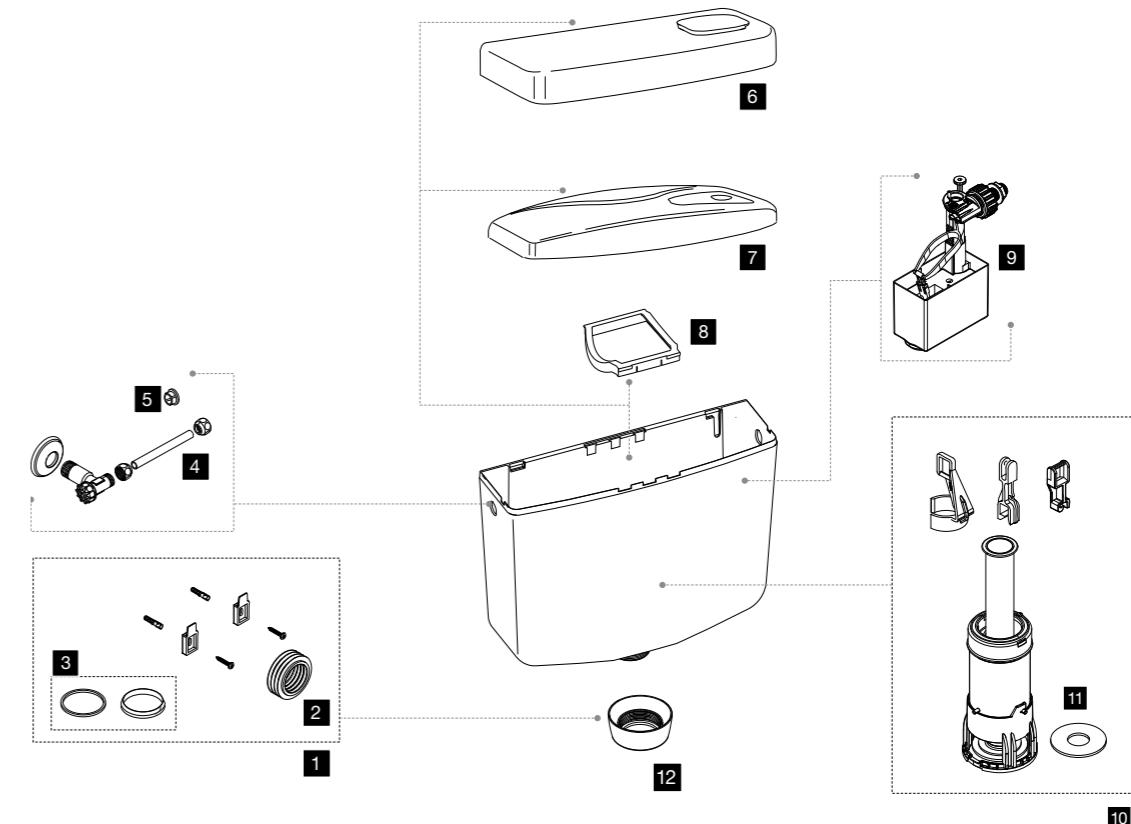


Nr.	Code	Description	Qt.	Code
1	883327	Nut flush White and accessories	1	
2.1	622803	Rubber seal Ø45	5	
2.2	622802	Rubber seal Ø40	5	
2.3	622801	Rubber seal Ø32	5	
3	053386	Conical seal for flush pipe	1	
4	030859	Stop valve ½X%	1	
5	049519	Side White cover	4	
6	012937	GEMMA White LID	1	
7	054388	IVORY White lid	1	
8	037197	Central Block	1	
9	882504	Side inlet valve %	1	
10	883028	Outlet valve seal 60X23.8X2.7	5	
11	011989	Start/stop TOPAZIO outlet valve	1	
12	030858	Nut flush White	1	

INLET VALVES

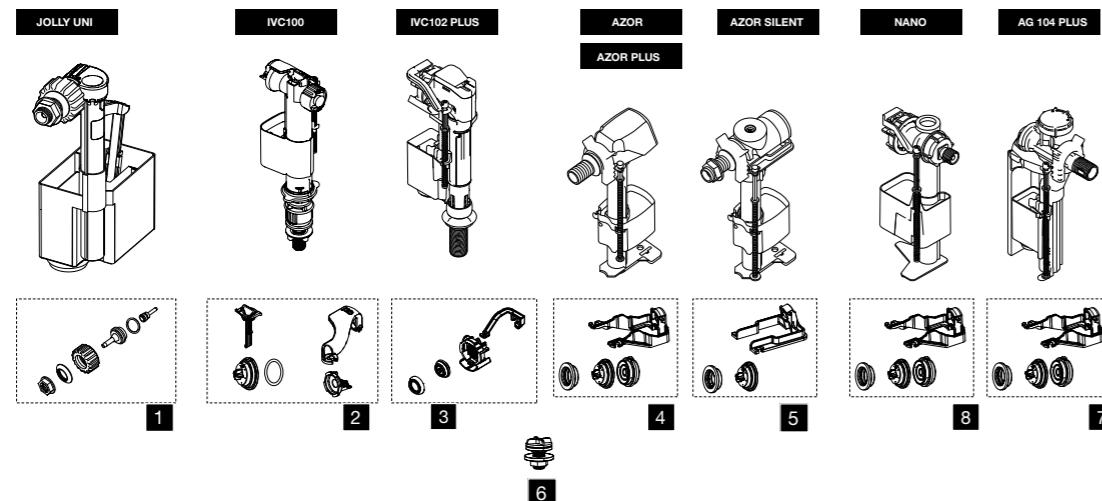


Nr.	Code	Description	Qt. Code
1	012002	Parts set JOLLY UNI	1
2	878899	Membrane kit for IVC100	1
3	878824	Membrane kit for IVC 102 PLUS	1
4	012001	Membrane kit for AZOR	1
5	049494	Membrane kit for AZOR SILENT	1
6	058025	Bottom cover	1
7	883173	Membrane kit for AG104 Plus	1
8	880608	Membrane kit for Nano	1

OUTLET VALVES

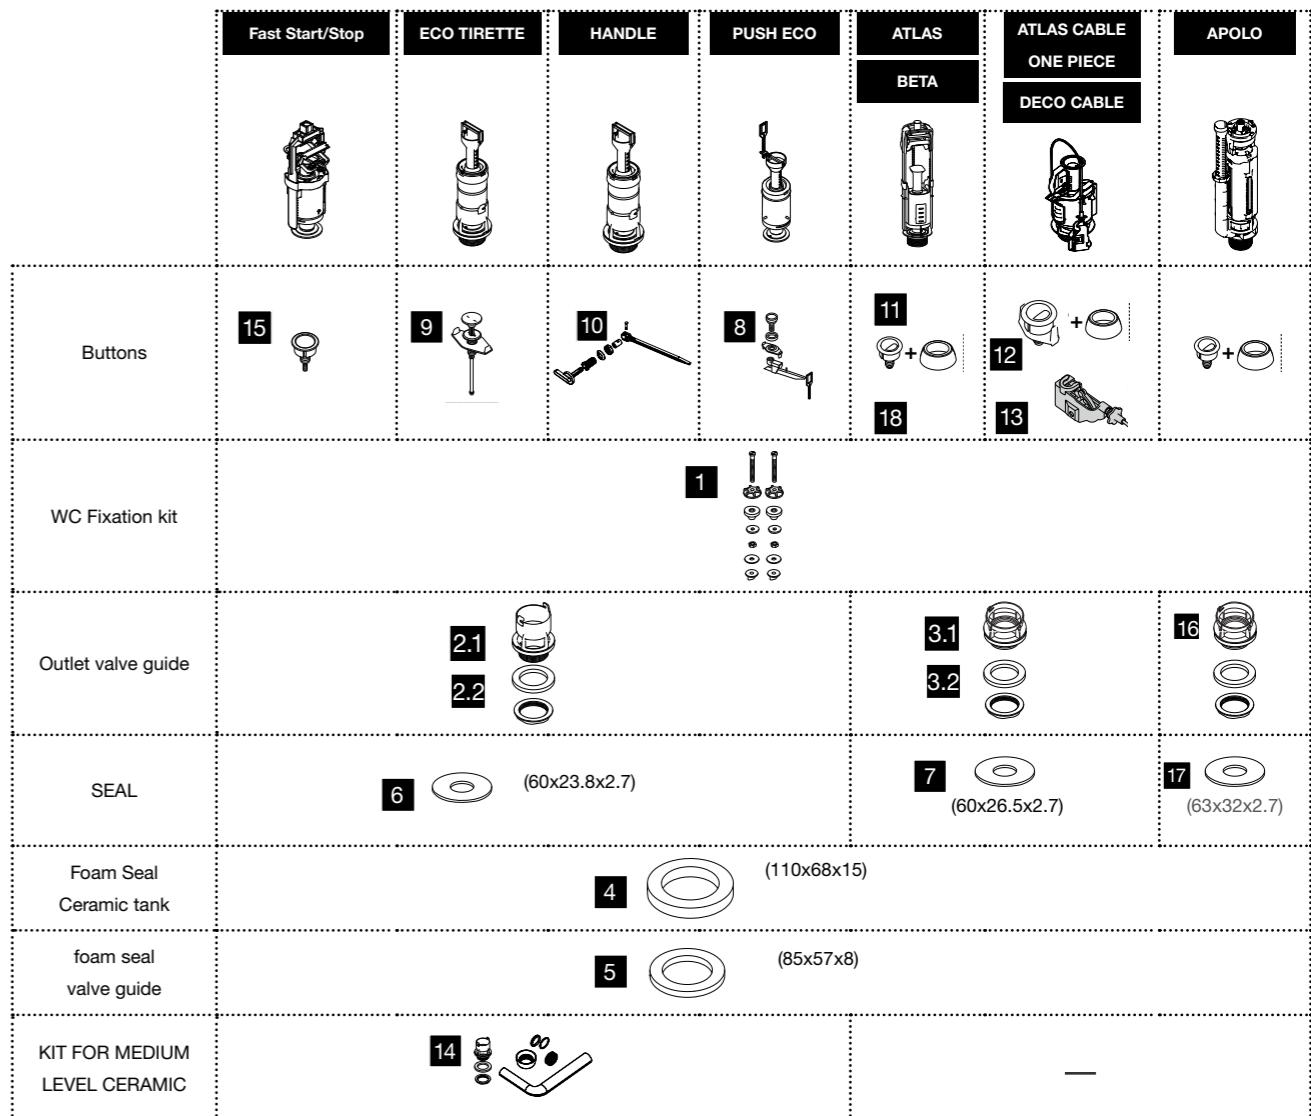

PNEUMATIC

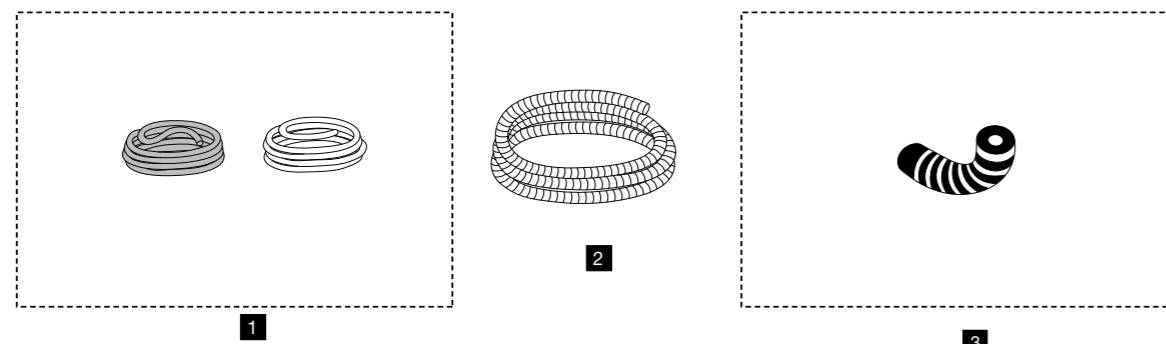

Nr.	Code	Description	Qt. Code
1	043234	3m Pneumatic pipe (2x)	1
2	049544	1,8m protection pipe	1
3	049594	Pneumatic push button connection	10

Nr.	Code	Description	Qt. Code
1	023425	Cistern fixation kit M6X100 stainless steel	1
2.1	023400	Close-coupled outlet valve guide - Ø50 (1. 1/2")	1
2.2	049738	Medium level ceramic cisterns outlet valve guide - Ø50 (1. 1/2")	1
3.1	011919	Outlet valve guide for ATLAS close-coupled - Ø50 (1. 1/2")	1
3.2	013666	Medium level ceramic cisterns ATLAS outlet valve guide - Ø50 (1. 1/2")	1
4	053826	Foam seal 110X68X15 for WC pan	5
5	047922	Foam seal for outlet valve guide 85X57X8	2
6	883028	Outlet valve seal 60X23.8X2.7	5
7	883226	Cable outlet valve seal 60x26.5x2	10
8	048514	POUSSOIR ECO push button	1
9	036905	TIRETTE ECO push button	1
10	033767	HANDLE push button	1
11	065328	ATLAS push buttons >12	1
12	054600	ATLAS CABLE push buttons >12	1
13	021184	Cable for ATLAS CABLE	1
14	057994	Chrome pipe kit for medium level ceramic cisterns	1
15	096003	Fast start/stop push button	1
16	883208	APOLO outlet valve support	1
17	883174	APOLO Outlet valve seal 60X23.8X2.7	1
18	883219	BETA push button	1

PACKAGING INFORMATION



Page	Code	Description		WxDxH	Kg	Qt.		Multiple Box Dim	Kg	Qty per Pallet	Pallet Height		Pallet Width	Pallet Length	Kg
------	------	-------------	--	-------	----	-----	--	------------------	----	----------------	---------------	--	--------------	---------------	----

SANITARY SYSTEMS**EASY MOVE WASHBASIN**

30	881673	Easy Move Washbasin	-	-	-	-	-	-	-	-	-	-	-	-	-
30	883045	Glass Black	-	-	-	-	-	-	-	-	-	-	-	-	-
30	883046	Glass White	-	-	-	-	-	-	-	-	-	-	-	-	-

EASY MOVE

31	005308	EASY MOVE	1485x217x774	33	-	-	-	5	934	800	1200	165			
31	601831	EASY MOVE glass White	-	20	1	-	20	8	600	800	1200	160			
31	601833	EASY MOVE glass Black	-	20	-	-	-	8	600	800	1200	160			
31	879143	Lift-up support rails	1120x327x284	6	2	-	8	16	2430	800	1200	128			

QR-INOX - HUNG WC

37	061565	QR-INOX White button Pneumatic hung wc	1185x545x282	25	-	-	-	5	1570	800	1200	125			
37	878815	QR-INOX White no-touch cap Hydroboost hung wc	1185x545x282	25	-	-	-	5	1570	800	1200	125			
37	878640	QR-INOX White no-touch cap AC hung wc	1185x545x282	25	-	-	-	5	1570	800	1200	125			
37	061568	QR-INOX Black button Pneumatic hung wc	1185x545x282	25	-	-	-	5	1570	800	1200	125			
37	878834	QR-INOX Black no-touch cap Hydroboost hung wc	1185x545x282	25	-	-	-	5	1570	800	1200	125			
37	878641	QR-INOX Black no-touch cap AC hung wc	1185x545x282	25	-	-	-	5	1570	800	1200	125			
37	878137	QR-INOX Gold button Pneumatic hung wc	1185x545x282	25	-	-	-	5	1570	800	1200	125			
37	878164	QR-INOX Taupe button Pneumatic hung wc	1185x545x282	25	-	-	-	5	1570	800	1200	125			
37	878168	QR-INOX Anthracite button Pneumatic hung wc	1185x545x282	25	-	-	-	5	1570	800	1200	125			
37	878172	QR-INOX Red button Pneumatic hung wc	1185x545x282	25	-	-	-	5	1570	800	1200	125			

QR-INOX - FLOOR

38	061562	QR-INOX White button Pneumatic floor	1185x545x282	20	-	-	-	5	1570	800	1200	100			
38	878835	QR-INOX White no-touch cap Hydroboost floor	1185x545x282	20	-	-	-	5	1570	800	1200	100			
38	878642	QR-INOX White no-touch cap AC floor	1185x545x282	20	-	-	-	5	1570	800	1200	100			
38	061563	QR-INOX Black button Pneumatic floor	1185x545x282	20	-	-	-	5	1570	800	1200	100			
38	878836	QR-INOX Black no-touch cap Hydroboost floor	1185x545x282	20	-	-	-	5	1570	800	1200	100			
38	878643	QR-INOX Black no-touch cap AC floor	1185x545x282	20	-	-	-	5	1570	800	1200	100			

Page	Code	Description		WxDxH	Kg	Qt.		Multiple Box Dim	Kg	Qty per Pallet	Pallet Height		Pallet Width	Pallet Length	Kg
------	------	-------------	--	-------	----	-----	--	------------------	----	----------------	---------------	--	--------------	---------------	----

QR-INOX - FREE-STANDING

39	879059	QR-INOX White button Pneumatic Free-standing	1200x545x380	30	-	-	-	-	-	4	1672	800	1200	120	
39	879061	QR-INOX White no-touch cap Hydroboost Free-standing	1200x545x380	30	-	-	-	-	-	4	1672	800	1200	120	
39	879151	QR-INOX White no-touch cap AC Free-standing	1200x545x380	30	-	-	-	-	-	4	1672	800	1200	120	
39	879060	QR-INOX Black Pneumatic Free-standing	1185x545x282	30	-	-	-	-	-	4	1672	800	1200	120	
39	879062	QR-INOX Black no-touch cap Hydroboost Free-standing	1200x545x380	30	-	-	-	-	-	4	1672	800	1200	120	
39	879152	QR-INOX Black no-touch cap AC Free-standing	1200x545x380	30	-	-	-	-	-	4	1672	800	1200	120	

QR TOTAL - HUNG WC

40	878152	QR TOTAL White button Pneumatic hung wc	1185x545x282	25	-	-	-	-	-	5	1570	800	1200	125	
40	878153	QR TOTAL White no-touch cap Hydroboost hung wc	1185x545x282	25	-	-	-	-	-	5	1570	800	1200	125	
40	878633	QR TOTAL White no-touch cap AC hung wc	1185x545x282	25	-	-	-	-	-	5	1570	800	1200	125	
40	878141	QR TOTAL Black button Pneumatic hung wc	1185x545x282	25	-	-	-	-	-	5	1570	800	1200	125	
40	878147	QR TOTAL Black no-touch cap Hydroboost hung wc	1185x545x282	25	-	-	-	-	-	5	1570	800	1200	125	
40	878631	QR TOTAL Black no-touch cap AC hung wc	1185x545x282	25	-	-	-	-	-	5	1570	800	1200	125	

QR TOTAL - FLOOR

41	878150	QR TOTAL White button Pneumatic floor	1185x545x282	20	-	-	-	-	-	5	1570	800	1200	100	

<tbl_r cells="16" ix="4" maxcspan="1" maxrspan="1" usedcols="1

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
SEAL BOX - FLOOR												
45	880455	SEAL BOX White button Pneumatic floor	1200x595x270	25	-	-	-	5	1570	800	1200	125
45	880457	SEAL BOX White no-touch cap Hydroboost floor	1200x595x270	25	-	-	-	5	1570	800	1200	125
45	880459	SEAL BOX White no-touch cap AC floor	1200x595x270	25	-	-	-	5	1570	800	1200	125
45	880456	SEAL BOX Black button Pneumatic floor	1200x595x270	25	-	-	-	5	1570	800	1200	125
45	880458	SEAL BOX Black no-touch cap Hydroboost floor	1200x595x270	25	-	-	-	5	1570	800	1200	125
45	880460	SEAL BOX Black no-touch cap AC floor	1200x595x270	25	-	-	-	5	1570	800	1200	125
OLI74 PLUS - HAPPY AIR direct												
52	883014	OLI120 PLUS Mechanic Happy Air	670x150x460	4				45	2400	800	1200	180
52	880376	HAPPY AIR FAN	-	-	-	-	-	-	-	-	-	-
52	880377	HAPPY AIR FAN PLUS	-	-	-	-	-	-	-	-	-	-
OLI74 PLUS - HAPPY AIR Simflex												
52	883015	OLI120 PLUS Mechanic Simflex Happy Air	915x450x160	9				35	2410	1000	1200	315
52	880376	HAPPY AIR FAN	-	-	-	-	-	-	-	-	-	-
52	880377	HAPPY AIR FAN PLUS	-	-	-	-	-	-	-	-	-	-
OLI74 PLUS - HAPPY AIR Sanitarblock												
53	883016	OLI120 PLUS Mechanic Sanitarblock Happy Air	915x450x160	9				35	2410	1000	1200	315
53	880376	HAPPY AIR FAN	-	-	-	-	-	-	-	-	-	-
53	880377	HAPPY AIR FAN PLUS	-	-	-	-	-	-	-	-	-	-
OLI74 PLUS - HAPPY AIR Free-standing												
53	883017	OLI120 PLUS Mechanic Free-standing Happy Air	1180x140x530	18				20	2350	800	1200	360
53	880376	HAPPY AIR FAN	-	-	-	-	-	-	-	-	-	-
53	880377	HAPPY AIR FAN PLUS	-	-	-	-	-	-	-	-	-	-
OLI74 PLUS - HAPPY AIR direct												
54	101775	OLI74 PLUS Mechanic HAPPY AIR	586x126x680	3	-	-	-	45	2200	1000	1200	137
54	880376	HAPPY AIR FAN 80	-	4	-	-	-	-	-	-	-	-
54	880377	HAPPY AIR FAN 100	-	4	-	-	-	-	-	-	-	-

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
OLI74 PLUS - HAPPY AIR Simflex												
54	048591	OLI74 PLUS Mechanic HAPPY AIR Simflex	910x150x640	8	-	-	-	-	-	26	2000	900
54	048590	OLI74 PLUS Mechanic HAPPY AIR Sanitarblock	1175x167x634	13	-	-	-	-	-	16	2229	835
54	101774	OLI74 PLUS Mechanic HAPPY AIR Free-standing	1175x167x634	15	-	-	-	-	-	16	1836	800
OLI120 PLUS - direct												
58	099941	OLI120 PLUS Mechanic	670x150x460	4	-	-	-	-	-	45	2610	820
58	880777	OLI120 Mechanic OLIpure	670x150x460	4	-	-	-	-	-	45	2610	800
58	153964	OLI 120 PLUS Pneumatic	670x150x460	4	-	-	-	-	-	45	2360	800
58	154075	OLI 120 PLUS Electronic	670x150x460	4	-	-	-	-	-	45	2360	800
58	878843	OLI120 PLUS cap Hydroboost	670x150x460	4	-	-	-	-	-	45	2610	820
58	878619	OLI120 PLUS cap AC	670x150x460	4	-	-	-	-	-	45	2610	820
OLI120 PLUS - Simflex												
58	099946	OLI120 PLUS Mechanic Simflex	915x450x160	9	-	-	-	-	-	35	2410	1000
58	880778	OLI 120 Mechanic OLIpure Simflex	915x450x160	9	-	-	-	-	-	35	2400	1000
58	154078	OLI 120 PLUS Pneumatic Simflex	915x450x160	9	-	-	-	-	-	35	2340	1000
58	154079	OLI 120 PLUS Electronic Simflex	915x450x160	9	-	-	-	-	-	35	2340	1000
58	878844	OLI120 PLUS cap Hydroboost Simflex	915x450x160	9	-	-	-	-	-	35	2410	1000
58	878620	OLI120 PLUS cap AC Simflex	915x450x160	9	-	-	-	-	-	35	2410	1000
OLI120 PLUS - Block												
59	151339	OLI120 PLUS Mechanic Block	486x161x1070	8	-	-	-	-	-	26	2210	1000
59	880779	OLI120 Mechanic OLIpure Block	486x161x1070	8	-	-	-	-	-	26	2210	1000
59	154076	OLI120 PLUS Pneumatic Block	486x161x1070	8	-	-	-	-	-	26	2210	1000
59	154077	OLI120 PLUS Electronic Block	486x161x1070	8	-	-	-	-	-	26	2210	1000
59	878845	OLI120 PLUS cap Hydroboost Block	486x161x1070	8	-	-	-	-	-	26	2210	1000
59	878623	OLI120 PLUS cap AC Block	486x161x1070	8	-	-	-	-	-	26	2210	1000

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
OLI120 PLUS -Sanitarblock												
59	09949	OLI120 PLUS Mechanic Sanitarblock	1180x140x530	15	-	-	-	20	2350	840	1200	300
59	880780	OLI 120 Mechanic OLIpure Sanitarblock	1180x140x530	15	-	-	-	20	2350	800	1200	300
59	177306	OLI 120 PLUS Pneumatic Sanitarblock	1180x140x530	15	-	-	-	20	2350	840	1200	300
59	177305	OLI 120 PLUS Electronic Sanitarblock	1180x140x530	15	-	-	-	20	2350	840	1200	300
59	878846	OLI120 PLUS cap Hydroboost Sanitarblock	1180x140x530	15	-	-	-	20	2350	840	1200	300
59	878621	OLI120 PLUS cap AC Sanitarblock	1180x140x530	15	-	-	-	20	2350	840	1200	300
OLI120 - Free-standing												
60	09952	OLI120 PLUS Mechanic Free-standing	1180x140x530	18	-	-	-	20	2350	840	1200	360
60	880781	OLI120 Mechanic OLIpure Free-standing	1180x140x530	18	-	-	-	20	2350	800	1200	360
60	09951	OLI120 PLUS Pneumatic Free-standing	1180x140x530	18	-	-	-	20	2350	840	1200	360
60	09943	OLI120 PLUS Electronic Free-standing	1180x140x530	18	-	-	-	20	2280	840	1200	360
60	878847	OLI120 PLUS cap Hydroboost Free-standing	1180x140x530	18	-	-	-	20	2350	840	1200	360
60	878622	OLI120 PLUS cap AC Free-standing	1180x140x530	18	-	-	-	20	2350	840	1200	360
60	154083	OLI 120 PLUS Mechanic height adjustable Sanitarblock	1180x140x530	18	-	-	-	20	2440	800	1200	360
61	135980	OLI 120 PLUS Mechanic Sanitarblock SHT	1180x140x530	18	-	-	-	20	2350	800	1200	360
61	880366	OLI 120 PLUS Mechanic Free-standing SHT	1180x140x530	18	-	-	-	20	2350	800	1200	360
61	191887	Shower toilet connection kit	270x190x57	1	34	595x391x500	34	680	2500	800	1200	680
DOUBLE FRAME - WC/URINAL/WASHBASIN												
63	882618	DOUBLE FRAME WC URINAL/WASHBASIN	1176x256x545	-	-	-	-	6	1250	800	1200	-
OLI120 - direct												
66	097945	OLI120 Mechanic	670x150x460	4	-	-	-	45	2610	820	1280	180
OLI120 - Simflex												
66	097946	OLI120 Mechanic Simflex	915x450x160	10	-	-	-	35	2410	1000	1200	350
OLI120 - Sanitarblock												
67	097947	OLI120 Mechanic Sanitarblock	1180x140x530	15	-	-	-	20	2350	800	1200	300

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
OLI74 PLUS - direct												
72	601601	OLI74 PLUS Mechanic	586x126x680	4	5	656x596x707	-	60	2281	1192	1312	240
72	601603	OLI74 PLUS Mechanic 4/2l	586x126x680	4	-	-	-	45	2200	1000	1200	180
72	877961	OLI74 PLUS Mechanic 2 inlet valves	586x126x680	4	5	656x596x707	-	60	2281	1192	1312	240
72	880789	OLI74 PLUS Mechanic 4/2L 2 inlet valves	586x126x680	4	-	-	-	60	2281	1192	1312	240
72	880782	OLI74 Mechanic OLIpure	586x126x680	4	-	-	-	45	2200	1000	1200	180
72	601602	OLI74 PLUS Pneumatic	586x126x680	4	-	-	-	45	2200	1000	1200	180
72	077715	OLI74 PLUS Electronic	586x126x680	4	-	-	-	45	2200	1000	1200	180
72	878838	OLI74 PLUS cap Hydroboost	586x126x680	4	-	-	-	45	2200	1000	1200	180
72	878624	OLI74 PLUS cap AC	805x146x640	4	-	-	-	26	2230	910	1280	104
OLI74 PLUS - Simflex												
72	601901	OLI74 PLUS Mechanic Simflex	910x150x640	8	-	-	-	26	2230	910	1280	208
72	216251	OLI74 PLUS Mechanic 4/2l Simflex	910x150x640	8	-	-	-	26	2220	800	1200	208
72	878929	OLI74 PLUS Mechanic Simflex 2 inlet valves	910x150x640	8	-	-	-	26	2230	910	1280	208
72	880790	OLI74 PLUS Mechanic 4/2l Simflex 2 inlet valves	910x150x640	8	-	-	-	26	2230	910	1280	208
72	880783	OLI74 Mechanic OLIpure Simflex	910x150x640	8	-	-	-	26	2230	800	1200	208
72	002332	OLI74 PLUS Pneumatic Simflex	910x150x640	8	-	-	-	26	2230	910	1280	208
72	077736	OLI74 PLUS Electronic Simflex	910x150x640	8	-	-	-	26	2230	910	1280	208
72	878839	OLI74 PLUS cap Hydroboost Simflex	910x150x640	8	-	-	-	26	2230	910	1280	208
72	878625	OLI74 PLUS cap AC Simflex	1005x191x550	8	-	-	-	24	2370	1000	1200	192
OLI74 PLUS S90 - Sanitarblock												
73	601803	OLI74 PLUS Mechanic S90 Sanitarblock	1180x140x530	15	-	-	-	20	2350	800	1200	300
73	216248	OLI74 PLUS Mechanic 4/2l S90 Sanitarblock	1180x140x530	15	-	-	-	20	2350	800	1200	300
73	880799	OLI74 PLUS Mechanic S90 Sanitarblock 2 inlet valves	1180x140x530	15	-	-	-	20	2350	800	1200	300
73	880792	OLI74 PLUS Mechanic 4/2l S90 Sanitarblock 2 inlet valves	1180x140x530	15	-	-	-	20	2350	800	1200	300
73	880784	OLI74 Mechanic OLIpure S90 Sanitarblock	1180x140x530	15	-	-	-	20	2350	800	1200	300
73	187649	OLI74 PLUS Pneumatic S90 Sanitarblock	1180x140x530	15	-	-	-	20	2350	800	1200	300
73	187650	OLI74 PLUS Electronic S90 Sanitarblock	1180x140x530	15	-	-	-	20	2350	800	1200	300
73	878840	OLI74 PLUS cap Hydroboost S90 Sanitarblock	1180x140x530	15	-	-	-	20	2350	800	1200	300
73	878655	OLI74 PLUS cap AC S90 Sanitarblock	1180x140x530	15	-	-	-	20	2350	800	1200	300

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
OLI74 PLUS - Sanitarblock												
74	601821	OLI74 PLUS Mechanic Sanitarblock	1175x167x634	15	-	-	-	16	2229	835	1200	240
74	216249	OLI74 PLUS Mechanic 4/2l Sanitarblock	1175x167x634	15	-	-	-	16	2229	835	1200	240
74	879085	OLI74 PLUS Mechanic Sanitarblock 2 inlet valves	1175x167x634	15	-	-	-	16	2229	835	1200	240
74	880791	OLI74 PLUS Mechanic 4/2l Sanitarblock 2 inlet valves	1175x167x634	15	-	-	-	16	2229	835	1200	240
74	880785	OLI74 Mechanic OLIpure Sanitarblock	1175x167x634	15	-	-	-	16	2229	835	1200	240
74	002333	OLI74 PLUS Pneumatic Sanitarblock	1175x167x634	15	-	-	-	16	2337	801	1200	240
74	077746	OLI74 PLUS Electronic Sanitarblock	1175x167x634	15	-	-	-	16	2229	835	1200	240
74	878841	OLI74 PLUS cap Hydroboost Sanitarblock	1175x167x634	15	-	-	-	16	2229	835	1200	240
74	878626	OLI74 PLUS cap AC Sanitarblock	1175x167x634	15	-	-	-	16	2229	835	1200	240
OLI74 PLUS - Free-standing												
74	601824	OLI74 PLUS Mechanic Free-standing	1175x167x634	16	-	-	-	16	2337	801	1268	256
74	216247	OLI74 PLUS Mechanic 4/2l Free-standing	1175x167x634	16	-	-	-	16	2229	835	1200	256
74	879089	OLI74 PLUS Mechanic Free-standing 2 inlet valves	1175x167x634	16	-	-	-	16	2337	801	1200	256
74	880793	OLI74 PLUS Mechanic 4/2l Free-standing 2 inlet valves	1175x167x634	16	-	-	-	16	2337	801	1200	256
74	880786	OLI74 Mechanic OLIpure Free-standing	1175x167x634	16	-	-	-	16	2229	800	1200	256
74	002488	OLI74 PLUS Pneumatic Free-standing	1175x167x634	16	-	-	-	16	2337	801	1268	256
74	077752	OLI74 PLUS Electronic Free-standing	1175x167x634	16	-	-	-	16	2337	801	1268	256
74	878842	OLI74 PLUS cap Hydroboost Free-standing	1175x167x634	16	-	-	-	16	2300	825	1200	256
74	878627	OLI74 PLUS cap AC Free-standing	1175x167x634	16	-	-	-	16	2229	835	1200	256
74	600859	OLI74 PLUS Mechanic Free-standing double	1305x306x670	32	-	-	-	7	2383	800	1305	224
OLI80 - direct												
78	600051	OLI80 Mechanic	625x117x670	5	5	650x626x676	-	60	2188	1252	1300	300
OLI80 - squat pan												
78	045058	OLI80 Mechanic squat pan	625x117x670	5	5	650x626x676	-	60	2188	1252	1300	300
OLI80 - Simflex												
78	600251	OLI80 Mechanic Simflex	915x166x565	8	-	-	-	22	1990	897	1200	176
OLI80 - Sanitarblock												
78	600151	OLI80 Mechanic Sanitarblock	1180x140x530	13	-	-	-	20	2350	800	1200	260

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
EXPERT PLUS - direct												
82	721003	EXPERT PLUS Mechanic	525x166x590	4	-	-	-	35	2096	857	1200	140
82	152966	EXPERT Mechanic OLIpure	525x166x590	4	-	-	-	35	2096	800	1200	140
82	721005	EXPERT PLUS Pneumatic	525x166x590	4	-	-	-	35	2096	857	1200	140
EXPERT PLUS - Simflex 820												
82	076456	EXPERT PLUS Mechanic Simflex 820	785x440x170	5	-	-	-	30	2360	800	1200	150
82	152967	EXPERT Mechanic OLIpure Simflex 820	785x440x170	5	-	-	-	30	2350	800	1200	150
82	141960	EXPERT PLUS Pneumatic Simflex 820	785x440x170	5	-	-	-	30	2360	800	1200	150
EXPERT PLUS - Sanitarblock 820												
83	721703	EXPERT PLUS Mechanic Sanitarblock 820	845x191x525	5	-	-	-	24	2260	845	1227	120
83	880787	EXPERT Mechanic OLIpure Sanitarblock 820	845x191x525	5	-	-	-	24	2250	800	1200	120
83	721705	EXPERT PLUS Pneumatic Sanitarblock 820	845x191x525	5	-	-	-	24	2260	845	1227	120
83	014092	EXPERT PLUS Mechanic Free-standing 820	845x191x525	15	-	-	-	24	2260	845	1227	360
83	880788	EXPERT Mechanic OLIpure Free-standing 820	845x191x525	15	-	-	-	24	2250	800	1200	360
83	048375	EXPERT PLUS Pneumatic Free-standing 820	845x191x525	15	-	-	-	24	2260	845	1227	360
EXPERT PLUS - Simflex 1130												
84	014095	EXPERT PLUS Mechanic Simflex 1130	805x166x580	11	-	-	-	21	1900	830	1200	231
EXPERT PLUS - Sanitarblock 1130												
85	721803	EXPERT PLUS Mechanic Sanitarblock 1130	1165x186x445	6	-	-	-	16	1940	800	1200	96
EXPERT PLUS - Free-standing 1130												
85	014091	EXPERT PLUS Mechanic Free-standing 1130	1165x186x445	16	-	-	-	16	1940	800	1200	256
QUADRA PLUS - direct												
88	720002	QUADRA PLUS Mechanic	286x205x610	4	-	-	-	64	2460	820	1200	256
88	037172	QUADRA PLUS Pneumatic	286x205x610	4	-	-	-	64	2408	824	1200	256
QUADRA PLUS - Sanitarblock												
88	135974	QUADRA PLUS Mechanic Sanitarblock	1179x220x310	12	-	-	-	20	2424	800	1200	240
88	141945	QUADRA PLUS Pneumatic Sanitarblock	1179x220x310	12	-	-	-	20	2424	800	1200	240

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
QUADRA PLUS - Free-standing												
89	722021	QUADRA PLUS Mechanic Free-standing	1179x220x310	13	-	-	-	20	2424	800	1200	260
89	187103	QUADRA PLUS Pneumatic Free-standing	1179x220x310	13	-	-	-	20	2424	800	1200	260
FRAMES												
92	882613	Washbasin Kit	620x165x420	-	-	-	-	216	2100	800	1200	-
92	882618	DOUBLE FRAME WC URINAL/WASHSBASIN	1176x256x545	-	-	-	-	6	1250	800	1200	-
93	882612	Urinal Kit	-	-	-	-	-	216	2100	800	1200	-
93	882618	DOUBLE FRAME WC URINAL/WASHSBASIN	1176x256x545	-	-	-	-	6	1250	800	1200	-
94	881858	WALL TAP OR CONCEALED URINAL	-	-	-	-	-	-	-	-	-	-
94	882618	FLUSH VALVE DOUBLE FRAME WC URINAL/WASHSBASIN	1176x256x545	-	-	-	-	6	1250	800	1200	-
95	880462	WC FRAME for flush valve	-	-	-	-	-	-	-	-	-	-
95	880461	SHOWER Frame Sanitarblock	1170x65x260	10	-	-	-	48	1370	800	1200	480
96	880462	WC FRAME for Flush valve	1175x96x550	4	-	-	-	24	1810	800	1200	96
97	714001	WC Sanitarblock	625x172x450	4	-	-	-	36	1960	800	1250	144
97	616042	WC Free-standing	535x211x540	8	-	-	-	28	2320	800	1200	224
98	877930	4 WC Fixation Points Sanitarblock - axial connection	535x211x540	9	-	-	-	28	2320	800	1200	252
98	879027	4 WC Fixation Points Free-standing - axial connection	535x211x540	11	-	-	-	28	2320	800	1200	308
98	883176	ECO WC/BIDET Simflex	-	-	-	-	-	-	-	-	-	-
98	006987	BIDET Simflex	441x333x97	5	-	-	-	100	1712	800	1215	500
99	008908	ECO BIDET Sanitarblock	513x126x180	7	-	-	-	120	1780	800	1200	840
99	136078	BIDET Sanitarblock	1175x96x550	12	-	-	-	24	1810	800	1200	288
100	611011	WASHBASIN Simflex	-	3	-	-	-	-	-	-	-	-
100	881857	WASHBASIN Sanitarblock	1170x90x520	9	-	-	-	32	2500	800	1200	288
100	881858	Wall tap or concealed urinal flush valve	-	-	-	-	-	-	-	-	-	-
100	883081	Concealed siphon	-	-	-	-	-	-	-	-	-	-
101	882607	URINAL Sanitarblock	1170x90x520	10	-	-	-	32	2500	800	1200	320
101	879116	ECO URINAL frame	800x170x100	4	-	-	-	56	960	800	1200	224
102	000079	URINAL DIVIDER	800x50x400	7	-	-	-	-	-	-	-	-
102	031526	EASY Sanitarblock	1170x65x260	8	-	-	-	48	1370	800	1200	384
ACCESSORIES												
103	879808	STOP FIRE	340x230x100	4	-	-	-	-	-	-	-	-
104	154084	Pneumatic conversion Kit OLI120 PLUS	260x180x97	1	20	595x391x500	20	400	2650	800	1200	400
104	878294	Hydroboost conversion Kit OLI120 PLUS	385x183x125	1	9	595x391x435	9	180	2335	800	1200	180

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
104	154085	Electronic conversion Kit OLI120 PLUS	260x180x97	1	20	595x391x500	20	400	2650	800	1200	400
104	878293	AC conversion kit OLI 120 PLUS	215x215x135	1	6	595x391x250	6	96	1160	800	1200	96
104	878292	AC conversion kit OLI 74 PLUS	215x215x135	1	6	595x391x250	6	96	1160	800	1200	96
105	601527	Pneumatic conversion kit OLI74 PLUS	270x190x57	1	34	595x391x500	34	680	2660	800	1200	680
105	077754	Electronic conversion kit OLI74 PLUS	105x105x389	1	15	595x391x500	15	300	2660	1000	1200	300
105	878285	Hydroboost conversion kit OLI74 PLUS	385x183x125	1	9	595x391x435	9	180	2335	800	1200	180
105	216640	Fixation kit for OLI74 PLUS	595x391x250	1	50	595x391x250	50	800	1160	800	1200	800
106	556807	Pneumatic conversion kit EXPERT PLUS	270x190x57	1	34	595x391x500	34	680	2660	800	1200	680
106	601038	Mechanic conversion kit EXPERT PLUS	270x190x57	1	-	-	-	-	-	-	-	-
106	211743	Mechanic conversion kit EXPERT PLUS - top actuation	260x180x97	1	20	595x391x500	20	400	2660	800	1200	400
107	101773	Pneumatic conversion kit QUADRA PLUS	270x190x57	1	35	595x391x500	35	280	1160	800	1200	280
107	719183	Sanitarblock corner kit	106x106x100	1	30	595x391x250	30	960	2160	800	1200	960
107	086360	PP Adaptor Ø90/110	-	1	-	595x391x500	-	800	2160	800	1200	-
108	622022	Double HPDE WC outlet bend D1 - Ø90, D2 - Ø110	-	-	-	-	-	-	-	-	-	-
108	036888	PP WC outlet bend L - 340, D1 - Ø90, D2 - Ø90	-	1	-	20	595x391x500	-	400	2660	800	1200
108	622002	HPDE WC outlet bend L - 300, D1 - Ø90, D2 - Ø110	-	-	-	10	595x391x250	-	640	2150	800	1200
108	622003	HPDE WC outlet bend L - 300, D1 - Ø110, D2 - Ø110	-	-	-	-	-	-	-	-	-	-
108	622004	HPDE WC outlet bend L - 230, D1 - Ø90, D2 - Ø100	-	-	-	20	595x391x250	-	640	2660	800	1200
108	622005	HPDE WC outlet bend L - 230, D1 - Ø110, D2 - Ø100	-	-	-	-	-	-	-	-	-	-
108	108185	S-bend outlet	-	-	-	-	-	-	-	-	-	-
108	880700	Double HPDE WC outlet bend	-	-	5	595x391x500	-	-	-	-	-	-
108	079929	Flexible outlet WC bend	-	1	-	24	595x391x500	-	480	2660	800	1200
108	014874	Flow rate reducer for OLI In-wall cisterns	-	-	100	600x400x435	-	2000	2275	800	1200	-
108	108380	Horizontal outlet WC	-	1	0,5	-	-	-	160	1160	800	1200
108	602501	Telescopic connecting pipe Ø45/40 x 130 White	-	-	-	-	-	-	-	-	-	-
109	622401	Flexible flush pipe extension	-	-	20	595x391x435	-	-	-	-	-	-
109	011229	Longer sleeves for wall-hung WC pan	-	-	20	595x391x500	-	320	2160	800	1200	-
111	622501	Sleeves for wall-hung pan L1 - 250 L2 - 180, D1 - Ø90	-	-	25	595x391x500	-	200	1000	800	1200	-
111	622503	Sleeves for wall-hung pan L1 - 250, L2 - 180, D1 - Ø110	-	-	20	595x391x500	-	2000</				

Page	Code	Description										
			WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
111	602201	Connecting pipe L - 280, D1 - Ø90, D2 - Ø45, D3 - Ø45 White	-	-	50	485x351x635	-	900	2065	970	1200	-
111	602301	Connecting pipe L - 500, D1 - Ø90, D2 - Ø40, D3 - Ø40 White	-	-	-	-	-	-	-	-	-	-
111	059272	Floor support system with lateral fixation for Simflex frames	-	2	-	-	-	-	-	-	-	-
111	079260	230/12V switch mode power supply	-	-	-	-	-	-	-	-	-	-
111	043234	3m Pneumatic pipe (x2) - A	-	-	-	-	-	-	-	-	-	-
112	049544	1,8m protection pipe - B	-	-	-	-	-	-	-	-	-	-
112	622301	Protective caps White	-	-	150	395x295x245	-	6000	1385	800	1200	-
113	622303	Protective caps Polished chrome	-	-	150	395x295x245	-	6000	1385	800	1200	-
113	879955	AMBIWAVE - OLIpure liquid	-	-	12	-	-	-	-	-	-	-
113	216252	Kit duplex	-	-	100	595x391x500	-	2000	2660	800	1200	-
113	620071	Acoustic insulation for wall-hung pan and bidet	-	-	50	595x391x500	-	-	-	-	-	-
113	620072	Acoustic insulation for wall-hung washbasin	-	-	-	-	-	-	-	-	-	-
CONTROL PLATES												
MOON												
121	878848	MOON White	252x178x109	7	16	595x391x500	112	320	2660	800	1200	2240
121	878981	MOON Black	252x178x109	7	16	595x391x500	112	320	2660	800	1200	2240

TRIBE												
123	879065	TRIBE White	252x178x109	1	16	595x391x500	16	320	2660	800	1200	320
123	879063	TRIBE Black	252x178x109	1	16	595x391x500	16	320	2660	800	1200	320
123	879066	TRIBE Red	252x178x109	1	16	595x391x500	16	320	2660	800	1200	320
123	879068	TRIBE Anthracite	252x178x109	1	16	595x391x500	16	320	2660	800	1200	320
123	879067	TRIBE Gold	252x178x109	1	16	595x391x500	16	320	2660	800	1200	320
123	879071	TRIBE Taupe	252x178x109	1	16	595x391x500	16	320	2660	800	1200	320
GLASSY												
123	878849	GLASSY White	252x178x109	1	16	595x391x500	16	320	2660	800	1200	320
123	878850	GLASSY Black	252x178x109	1	16	595x391x500	16	320	2660	800	1200	320
123	878700	GLASSY Gold	252x178x109	1	16	595x391x500	16	320	2660	800	1200	320
123	878703	GLASSY Red	252x178x109	1	16	595x391x500	16	320	2660	800	1200	320
123	878702	GLASSY Anthracite	252x178x109	1	16	595x391x500	16	320	2660	800	1200	320
123	878701	GLASSY Taupe	252x178x109	1	16	595x391x500	16	320	2660	800	1200	320

Page	Code	Description										
			WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
TRUMPET												
125	046199	TRUMPET Polished chrome	261x187x114	1	16	595x391x500	16	320	2660	800	1200	320
125	046198	TRUMPET Brushed	261x187x114	1	16	595x391x500	16	320	2660	800	1200	320
125	878783	TRUMPET White gold	261x187x114	1	16	595x391x500	16	320	2660	800	1200	320
125	883246	TRUMPET Gold plated	261x187x114	1	16	595x391x500	16	320	2660	800	1200	320
115	878784	TRUMPET Bronze	261x187x114	1	16	595x391x500	16	320	2660	800	1200	320
SM15												
126	022238	SM15 White tempered glass	470x170x77	1	8	485x351x345	8	192	1540	1000	1200	192
INO - X												
127	660001	INO - X 01 Polished chrome	300x300x45	1	-	-	-	-	-	-	-	-
127	661001	INO - X 01 Brushed	300x300x45	1	-	-	-	-	-	-	-	-
127	660002	INO - X 02 Polished chrome	300x300x45	1	-	-	-	-	-	-	-	-
127	661002	INO - X 02 Brushed	300x300x45	2	-	-	-	-	-	-	-	-
127	660003	INO - X 03 Polished chrome	300x300x45	1	-	-	-	-	-	-	-	-
127	661003	INO - X 03 Brushed	300x300x45	1	-	-	-	-	-	-	-	-
127	660006	INO - X 06 Polished chrome	300x300x45	2	-	-	-	-	-	-	-	-
127	661006	INO - X 06 Brushed	300x300x45	2	-	-	-	-	-	-	-	-
OCEANIA												
129	054564	OCEANIA mech stainless steel - Brushed	252x178x109	1	16	595x391x500	13	320	2660	800	1200	262
129	054561	OCEANIA mech stainless steel - Polished chrome	252x178x109	1	16	595x391x500	13	320	2660	800	1200	262
129	054554	OCEANIA mech glass White	252x178x109	1	16	595x391x500	11	320	2660	800	1200	224
129	054557	OCEANIA mech glass Black	252x178x109	1	16	595x391x500	11	320	2660	800	1200	223
129	054562	OCEANIA mech stainless steel button - glass Black	252x178x109	1	16	595x391x500	12	320	2660	800	1200	231
129	054558	OCEANIA mech stainless steel button - glass White	252x178x109	1	16	595x391x500	12	320	2660	800	1200	233
129	054988	OCEANIA pneu stainless steel - Brushed	252x178x109	1	16	595x391x500	14	320	2660	800	1200	274
129	054998	OCEANIA pneu Stainless steel - Polished chrome	252x178x109	1	16	595						

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
BLINK												
130	154963	BLINK Polished chrome	240x162x90	1	28	595x391x500	19	560	2660	800	1200	376
130	093399	BLINK Brushed	240x162x90	1	28	595x391x500	19	560	2660	800	1200	378
130	216621	BLINK White	240x162x90	1	28	595x391x500	19	560	2660	800	1200	384
130	878489	BLINK Black	240x162x90	1	28	595x391x500	20	560	2650	800	1200	392
130	883245	BLINK Gold plated	240x162x90	1	28	595x391x500	19	560	2660	800	1200	378
130	878781	BLINK White gold	240x162x90	1	28	595x391x500	19	560	2660	800	1200	378
130	878782	BLINK Bronze	240x162x90	1	28	595x391x500	19	560	2660	800	1200	378
KARISMA												
130	641001	KARISMA White	260x180x97	1	20	595x391x500	20	400	2660	800	1200	400
130	641004	KARISMA Polished chrome	260x180x97	1	20	595x391x500	20	400	2660	800	1200	400
130	641006	KARISMA Matt chrome	260x180x97	1	20	595x391x500	20	400	2660	800	1200	400
130	641015	KARISMA Black soft-touch	260x180x97	1	20	595x391x500	20	400	2660	800	1200	400
SALINA												
131	640081	SALINA White	260x180x97	1	20	595x391x500	20	320	2160	800	1200	320
131	640084	SALINA Polished chrome	260x180x97	1	20	595x391x500	20	320	2160	800	1200	320
131	640086	SALINA Matt chrome	260x180x97	1	20	595x391x500	20	320	2160	800	1200	320
131	640097	SALINA Black soft-touch - Polished chrome button	260x180x97	1	20	595x391x500	20	320	2160	800	1200	320
EASY DUAL												
131	011642	EASY DUAL Chrome	140x140x152	1	24	485x351x635	24	432	2065	1000	1200	432
131	011640	EASY DUAL white	140x140x152	1	24	485x351x635	24	432	2065	1000	1200	432
TREND												
131	656504	TREND Polished chrome	260x180x97	1	20	595x391x500	13	400	2660	800	1200	265
131	656506	TREND Matt chrome	260x180x97	1	20	595x391x500	13	400	2660	800	1200	269
MINI TREND												
132	605294	MINI TREND	260x175x137	1	20	595x391x500	20	320	2160	800	1200	320
MONO TREND												
132	605254	MONO TREND	260x180x97	1	20	595x391x500	20	400	2660	800	1200	400

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
PENUMATIC ACTUATORS												
132	605264	Pneumatic actuator SPHERA +	61x61x96	1	100	485x351x345	100	2000	1885	800	1200	2000
132	605274	Pneumatic actuator SPHERA -	61x61x96	1	100	485x351x345	100	2000	1885	800	1200	2000
133	718063	In-wall Pneumatic actuator hand operated White	-	-	1	-	-	-	-	-	-	-
133	605001	In-wall Pneumatic actuator hand operated White	260x180x97	1	20	595x391x500	20	400	2000	1000	1200	400
133	605004	In-wall Pneumatic actuator hand operated Polished chrome	260x180x97	1	20	595x391x500	20	400	2160	1000	1200	400
133	605101	Pneumatic actuator hand operated White	125x125x456	1	12	595x391x500	12	240	2660	800	1200	240
133	605104	Pneumatic Actuators hand operated Polished chrome	125x125x456	1	12	595x391x500	12	240	2660	800	1200	240
133	605201	Pneumatic actuator foot operated floor mounted	-	-	1	-	-	-	-	-	-	-
133	605301	Pneumatic actuator foot operated wall mounted	-	-	1	-	-	-	-	-	-	-
SEAMLESS												
135	880390	SEAMLESS Inspection plate	266x190x55	1	34	595x391x500	20	680	2660	800	1200	394
INSPECTION PLATE												
135	207892	Inspection plate Chrome	266x190x55	1	34	595x391x500	19	1000	2660	800	1200	563
135	207893	Inspection plate Brushed	266x190x55	1	34	595x391x500	20	1000	2660	800	1200	579
GLOBE												
136	152949	GLOBE White	266x190x55	1	34	595x391x500	20	680	2660	800	1200	394
136	152950	GLOBE Polished chrome	266x190x55	1	34	595x391x500	20	680	2660	800	1200	394
136	152951	GLOBE Matt chrome	266x190x55	1	34	595x391x500	20	680	2660	800	1200	394
136	152952	GLOBE Black soft-touch	266x190x55	1	34	595x391x500	20	680	2660	800	1200	394
136	152953	GLOBE Grey soft-touch	266x190x55	1	34	595x391x500	20	680	2660	800	1200	394
136	152954	GLOBE Gold plated	266x190x55	1	34	595x391x500	20	680	2650	800	1200	394
SLIM												
136	659041	SLIM White	266x190x55	1	34	595x391x500	20	680	2660	800	1200	394
136	659044	SLIM Polished chrome	266x190x55	1	34	595x391x500	20	680	2660	800	1200	394
136	659046	SLIM Matt chrome	266x190x55	1	34	595x391x500	20	680	2660	800	1200	394
136	659055	SLIM Black soft-touch	266x190x55	1	34	595x391x500	20	680	2660	800	1200	394
136	010216	SLIM Grey soft-touch	266x190x55	1	34	595x391x500	20	680	2660	800	1200	394

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
GLAM												
137	139178	GLAM White OLIpure	260x180x97	1	20	595x391x500	16	400	2660	800	1200	323
137	139179	GLAM Polished chrome OLIpure	260x180x97	1	20	595x391x500	16	400	2660	800	1200	323
137	139180	GLAM Matt chrome OLIpure	260x180x97	1	20	595x391x500	16	400	2660	800	1200	323
137	139181	GLAM Black soft-touch OLIpure	260x180x97	1	20	595x391x500	16	680	2660	800	1200	548
137	139184	GLAM White	266x190x55	1	34	595x391x500	9	680	2660	800	1200	548
137	139185	GLAM Polished chrome	266x190x55	1	34	595x391x500	9	680	2660	800	1200	548
137	139186	GLAM Matt chrome	266x190x55	1	34	595x391x500	9	680	2660	800	1200	548
137	139187	GLAM Black soft-touch	266x190x55	1	34	595x391x500	9	680	2660	800	1200	548
NARROW												
137	148300	NARROW White OLIpure	260x180x97	1	20	595x391x500	16	400	2660	800	1200	323
137	148301	NARROW Polished chrome OLIpure	260x180x97	1	20	595x391x500	16	400	2660	800	1200	323
137	148302	NARROW Matt chrome OLIpure	260x180x97	1	20	595x391x500	16	400	2660	800	1200	323
137	148303	NARROW Black soft-touch OLIpure	260x180x97	1	20	595x391x500	16	400	2660	800	1200	323
137	152939	NARROW White	266x190x55	1	34	595x391x500	9	680	2660	800	1200	548
137	152940	NARROW Polished chrome	266x190x55	1	34	595x391x500	9	680	2660	800	1200	548
137	152941	NARROW Matt chrome	266x190x55	1	34	595x391x500	9	680	2660	800	1200	548
137	152942	NARROW Black Soft-Touch	266x190x55	1	34	595x391x500	9	680	2660	800	1200	548
PLAIN												
138	070826	PLAIN White	266x190x55	1	34	595x391x500	9	680	2660	800	1200	548
138	070827	PLAIN Polished chrome	266x190x55	1	34	595x391x500	9	680	2660	800	1200	548
138	070828	PLAIN Matt chrome	266x190x55	1	34	595x391x500	9	680	2660	800	1200	548
138	070829	PLAIN Black soft-touch	266x190x55	1	34	595x391x500	9	680	2660	800	1200	548
iPLATE												
138	670001	iPLATE White	266x190x55	1	34	595x391x500	6	680	2660	800	1200	548
138	670004	iPLATE Polished chrome	266x190x55	1	34	595x391x500	10	680	2660	800	1200	548
138	670005	iPLATE Black soft-touch	266x190x55	1	34	595x391x500	10	680	2660	800	1200	548
138	670006	iPLATE Matt chrome	266x190x55	1	34	595x391x500	10	680	2660	800	1200	548
138	670051	Kit fantasy iPLATE	-	-	50	595x391x500	3	1000	2660	800	1200	806
138	670052	Kit elegance iPLATE	-	-	50	595x391x500	3	1000	2660	800	1200	806

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
RIA												
139	640581	RIA White	270x190x57	1	34	595x391x500	11	680	2120	870	1200	548
139	640584	RIA Polished chrome	270x190x57	1	34	595x391x500	11	680	2660	800	1200	548
139	640586	RIA Matt chrome	270x190x57	1	34	595x391x500	11	500	2120	870	1200	403
139	640591	RIA White bacterial proof	266x190x55	1	34	595x391x500	11	680	2660	800	1200	548
139	010244	RIA stop Polished chrome	270x190x57	1	22	540x330x392	7	550	2120	870	1200	444
139	010244	RIA stop White	270x190x52	1	22	540x330x392	7	550	2120	870	1200	444
RIVER												
139	638501	RIVER White	266x190x55	1	34	595x391x500	12	680	2660	800	1200	548
139	638504	RIVER Polished chrome	266x190x55	1	34	595x391x500	11	680	2660	800	1200	548
139	638506	RIVER Matt chrome	266x190x55	1	34	595x391x500	11	680	2660	870	1200	548
139	638508	RIVER Gold plated	266x190x55	1	20	540x330x392	7	500	2120	870	1200	403
METAL												
139	656004	METAL Polished chrome	266x190x55	1	14	595x391x250	14	448	2160	800	1200	361
139	656006	METAL Matt chrome	266x190x55	1	14	595x391x250	14	448	2160	800	1200	361
ELECTRA												
141	079206	ELECTRA III Polished chrome zamac	-	-	-	-	-	-	-	-	-	-
141	079205	ELECTRA II Polished chrome zamac	-	-	-	-	-	-	-	-	-	-
141	079207	ELECTRA I Polished chrome zamac	-	-	-	-	-	-	-	-	-	-
BLINK URINAL												
143	882264	BLINK URINAL Polished chrome	266x190x55	1	14	595x391x250	17	448	2160	800	1200	544
143	883087	Urinal concealed pre-installation	261x187x114	1	16	595x391x500	16	320	2660	800	1200	320
SM15 URINAL												
144	034265	SM15 URINAL White tempered glass	215x215x135	1	6	595x391x250	7	96	1150	800	1200	105
eAQUA URINAL												
145	879120	eAQUA URINAL Inox AC	-	-	-	-	-	-	-	-	-	-
145	879119	eAQUA URINAL Inox BATT	-	-	-	-	-	-	-	-	-	-
145	879123	Urinal concealed pre installation</										

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
GLOBE URINAL												
145	878466	GLOBE URINAL White	266x190x55	1	14	595x391x250	17	448	2160	800	1200	532
145	878818	GLOBE URINAL Polished chrome	266x190x55	1	14	595x391x250	17	448	2160	800	1200	532
145	878819	GLOBE URINAL Matt chrome	266x190x55	1	14	595x391x250	17	448	2160	800	1200	532
145	878822	GLOBE URINAL Gold plated	266x190x55	1	14	595x391x250	17	448	2160	800	1200	532
145	879017	Urinal concealed pre installation	261x187x114	1	16	595x391x500	16	320	2660	800	1200	320
EXPOSED FLUSH CISTERNS												
QUARZO												
154	124427	QUARZO	456x146x450	3	5	764x474x460	15	75	2450	1000	1238	225
154	880599	QUARZO OLipure	456x146x450	3	5	764x474x460	15	75	2400	1000	1220	225
TOPAZIO DD												
155	416201	TOPAZIO DD with 1/2" stop valve	446x144x446	4	-	-	-	65	2385	800	1200	260
155	416501	TOPAZIO DD	446x144x446	4	-	-	-	65	2385	800	1200	260
ONIX PLUS 2 in 1												
155	340221	ONIX PLUS 2 in 1	353x143x456	3	5	767x380x491	15	75	2440	800	1200	225
ZAFFIRO DD												
156	425201	ZAFFIRO DD with 1/2" stop valve	408x176x431	4	-	-	-	60	2305	800	1200	240
156	425501	ZAFFIRO DD	408x176x431	4	-	-	-	56	2044	1000	1200	224
156	002426	ZAFFIRO DD bottom connection	408x176x431	4	5	916x430x459	20	75	2455	860	1346	300
TURCHESE												
156	440201	TURCHESE with 1/2" stop valve	456x146x430	3	-	-	-	65	2310	800	1200	195
156	440051	TURCHESE	456x146x430	3	-	-	-	65	2310	800	1200	195
156	440881	TURCHESE Pneumatic version	456x146x430	3	5	777x475x456	15	75	2440	950	1252	225
OLISTYLE												
157	440141	OLISTYLE	456x146x430	3	-	-	-	52	1984	800	1200	156
TOPAZIO												
157	413781	TOPAZIO Pneu high with 1/2" stop valve	446x144x446	4	-	-	-	65	2385	800	1200	260

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
ACCESSORIES												
158	490601	A - Flush pipe for medium/high cisterns - White	-	1	25	1120x327x284	25	600	2432	1000	1200	600
158	490501	B - Flush pipe for medium/high cisterns - White	-	1	20	600x401x315	20	560	2365	802	1200	560
158	490701	Modular flush pipe for high cisterns - White	-	1	15	1120x327x284	15	360	2432	1000	1200	360
158	490301	Flush pipe H - 600, D - Ø32 - White	-	1	25	762x333x290	25	525	2190	800	1200	525
158	490318	Flush pipe H - 600, D - Ø40 - White	-	1	25	762x333x290	25	525	2190	800	1200	525
158	490401	Flush pipe H - 1000, D - Ø32 - White	-	1	25	1120x327x284	25	600	2432	1000	1200	600
158	490001	Flush pipe L - 210, D - Ø32 - White	-	1	40	600x401x315	40	1400	2365	1001	1203	1400
158	490101	Flush pipe L - 210, D - Ø40 - White	-	1	40	600x401x315	40	1400	2365	1001	1203	1400
158	490130	Flush pipe L - 350, D - Ø40 - White	-	1	20	600x401x315	20	700	2365	1001	1203	700
158	490881	Modular flush pipes for high/medium/low level cisterns - White	-	1	30	595x391x500	30	600	2160	1000	1200	600
158	883088	Adjustable flow reducer for exposed cisterns	-	0,1	500	395x295x245	5	21600	2525	800	1200	216
158	490751	Flush bend - White	-	1	25	600x401x315	25	875	2365	1001	1203	875
158	087617	TOPAZIO Pneumatic kit	260x180x97	1	18	595x391x500	2	360	2660	800	1200	46
UNIVERSAL MECHANISMS												
AG 104 PLUS												
164	883099	AG104 Plus 1/2P bag	-	1	50	595x391x500	50	1000	2660	800	1200	1000
164	883103	AG104 Plus 1/2P bottom bag	-	1	50	595x391x500	50	1000	2660	800	1200	1000
AZOR PLUS												
165	564100	AZOR PLUS side 3/8" brass - box	151x71x261	1	30	595x391x500	30	600	2650	800	1200	600
165	564102	AZOR PLUS bottom 3/8" brass - box	146x76x326	1	20	600x400x435	20	400	2425	800	1200	400
IVC102 PLUS												
166	878736	IVC102 PLUS 1/2 brass - box	151x71x261	1	30	595x391x500	30	600	2660	800	1200	600
166	878735	IVC102 PLUS 15/16 plastic - box	151x71x261	1	30	595x391x500	30	600	2660	800	1200	600
166	878738	IVC102 PLUS 1/2 brass - bag	-	1	35	595x391x500	35	700	2660	800	1200	700
166	878737	IVC102 PLUS 15/16 plastic - bag	-	1	35	595x391x500	35	700	2660	800	1200	700
166	879284	IVC102 PLUS 1/2 plastic - box	151x71x261	1	30	595x391x500	30	600	2660	800	1200	600
166	879285	IVC102 PLUS 1/2 plastic - bag	-	1	35	595x391x500	35	700	2660	800	1200	700
166	099936	IVC100 3/8" brass - box	151x71x261	1	30	59						

Page	Code	Description	WxDxH	Kg	Qty.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
AZOR SILENT												
167	002437	AZOR SILENT side/bottom 3/8" brass - blister	-	1	18	595x391x535	18	360	2300	1000	1200	360
COMPACT												
167	561460	COMPACT 3/8" brass - box	151x71x261	1	30	595x391x500	30	600	2650	800	1200	600
167	561598	COMPACT 3/8" brass - bag	-	1	60	595x391x500	60	1200	2160	1000	1200	1200
JOLLY UNI												
168	560160	JOLLY UNI 3/8" brass - box	151x71x261	1	30	595x391x500	30	600	2160	1000	1200	600
168	560170	JOLLY UNI 1/2" brass - box	151x71x261	1	30	595x391x500	30	500	2160	1000	1200	500
168	044993	JOLLY UNI 3/8" brass - bag	-	1	25	595x391x500	25	500	2160	1000	1200	500
168	044992	JOLLY UNI 1/2" brass - bag	-	1	25	595x391x500	25	500	2160	1000	1200	500
UNI BOTTOM												
168	562160	UNI BOTTOM 3/8" brass - box	101x86x401	1	20	595x391x500	20	400	2160	1000	1200	400
168	562176	UNI BOTTOM 3/8" plastic - box	101x86x401	1	20	595x391x500	20	500	2660	1000	1200	500
168	562162	UNI BOTTOM 1/2" brass - box	101x86x401	1	20	595x391x500	20	500	2660	1000	1200	500
168	562163	UNI BOTTOM 1/2" plastic - box	-	1	20	595x391x500	20	500	2660	1000	1200	500
168	092329	UNI BOTTOM refill 1/2" plastic - box	101x86x401	1	20	595x391x500	20	400	2660	800	1200	400
168	563571	UNI BOTTOM 3/8" plastic - bag	-	1	60	595x391x500	60	1200	2160	1000	1200	1200
168	022371	UNI BOTTOM 1/2" brass - bag	-	1	60	595x391x500	60	1200	2660	800	1200	1200
168	044995	UNI BOTTOM 1/2" plastic - bag	-	1	50	595x391x500	50	1000	2160	1000	1200	1000
168	879622	UNI BOTTOM 3/8" brass - bag	-	1	40	595x391x500	40	800	2660	1000	1200	800
APOLO												
169	882794	APOLO outlet valve bag	-	1	26	595x391x500	26	520	2660	800	1200	520
169	883098	APOLO outlet valve box	119x120x371	1	20	595x391x535	20	400	2300	800	1200	400
BETA												
169	883215	BETA outlet valve bag	-	-	26	595x391x500	26	520	2660	800	1200	520
ATLAS												
171	135948	ATLAS-bag	-	1	26	595x391x500	26	520	2660	800	1200	520
171	011967	ATLAS - box	119x105x355	1	20	595x391x500	20	500	2660	1000	1200	500

Page	Code	Description	WxDxH	Kg	Qty.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
FAST START/STOP												
171	100019	FAST START/STOP - box	119x105x355	1	20	595x391x500	20	400	2660	800	1200	400
171	088755	FAST START/STOP - bag	-	1	20	595x391x500	20	400	2660	800	1200	400
ATLAS CABLE												
172	501120	ATLAS CABLE - box	119x105x311	1	20	595x391x500	20	400	2160	1000	1200	400
172	022369	ATLAS CABLE - bag	-	1	30	595x391x500	30	480	2160	800	1200	480
172	880333	ATLAS CABLE ONE PIECE - box	119x105x311	1	20	595x391x500	20	320	2160	800	1200	320
172	880334	ATLAS CABLE ONE PIECE - bag	-	1	30	595x391x500	30	480	2160	800	1200	480
PUSH ECO												
173	501020	PUSH ECO - box	119x105x311	1	20	595x391x500	20	500	2660	1000	1200	500
173	501021	PUSH ECO - bag	-	1	20	595x391x500	20	400	2660	1000	1200	400
ECO TIRETTE												
173	507572	ECO TIRETTE - box	119x105x311	1	20	595x391x500	20	500	2660	1000	1200	500
173	500321	ECO TIRETTE - bag	119x105x311	1	20	595x391x500	20	500	2660	1000	1200	500
HANDLE												
174	501420	HANDLE - box	119x105x311	1	20	595x391x500	20	500	2660	1000	1200	500
PUSH ECO + ECO												
174	501023	PUSH ECO + ECO - bag	-	1	25	595x391x500	25	500	2160	1000	1200	500
PUSH ECO + UNI BOTTOM												
175	501034	PUSH ECO + UNI BOTTOM - bag	-	1	25	595x391x500	25	500	2160	1000	1200	500
FAST START/STOP + COMPACT												
175	100023	FAST START/STOP + COMPACT - box	152x122x397	1	20	595x391x500	12	500	2660	1000	1200	296
175	100022	FAST START/STOP + COMPACT - bag	-	1	20	595x391x500	12	500	2660	1000	1200	296
175	100032	FAST START/STOP + UNI BOTTOM - box	152x122x397	1	12	595x391x500	6	300	2660	1000	1200	160
175	100031	FAST START/STOP + UNI BOTTOM - bag	-	1	20	595x391x500	11	500	2660	1000	1200	266

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
IVC 100 + ATLAS CABLE												
164	099938	IVC 100 + ATLAS CABLE - bag	-	1	20	595x391x500	14	240	2660	800	1200	162
164	099939	IVC 100 + ATLAS CABLE - box	161x121x372	1	12	595x391x500	8	240	2660	800	1200	162

OLIPure kit

165	101768	OLIPure kit - box	161x116x261	1	17	595x391x500	15	340	2160	800	1200	307
-----	--------	-------------------	-------------	---	----	-------------	----	-----	------	-----	------	-----

ACCESSORIES

165	493064	Side cover White	-	1	100	595x391x250	100	1600	1160	800	1200	1600
165	493065	Side cover Polished Chrome	-	1	100	260x180x97	100	-	-	-	-	-
165	058025	Bottom cover	-	1	100	600x400x435	100	1600	1900	800	1200	1600

OLIFOLO
OLIFOLO premium

169	300301	OLIFOLO premium 80	160x920x140	6	-	-	-	96	1850	850	1250	587
169	300303	OLIFOLO premium 90	160x1180x140	6	-	-	-	55	1850	800	1200	342
169	300300	Support legs	-	-	-	-	-	-	-	-	-	-

OLIFOLO standard

169	300310	OLIFOLO standard 70	160x920x140	3	-	-	-	96	1850	950	1250	288
169	300312	OLIFOLO standard 80	160x920x140	3	-	-	-	96	1850	950	1250	330
169	300314	OLIFOLO standard 90	160x1180x140	3	-	-	-	55	1850	800	1200	191
169	300316	OLIFOLO standard 110	160x1180x140	4	-	-	-	55	1850	800	1200	210
169	300300	Support legs	-	-	-	-	-	-	-	-	-	-

OLIFOLO ceramic

170	300330	OLIFOLO ceramic 80	160x920x140	4	-	-	-	96	1850	950	1250	375
170	300300	Support legs	-	-	-	-	-	-	-	-	-	-

OLIFOLO basic

170	300341	OLIFOLO basic 40	150x150x560	1	-	-	-	120	1850	800	1200	120
170	300343	OLIFOLO basic 50	150x150x560	1	-	-	-	120	1850	800	1200	120
170	300340	OLIFOLO basic 60	160x60x140	1	-	-	-	112	1850	850	1200	155
170	300347	OLIFOLO basic 70	160x850x140	2	-	-	-	96	1850	900	1250	192

Page	Code	Description	WxDxH	Kg	Qt.	Multiple Box Dim	Kg	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Kg
170	300342	OLIFOLO basic 80	160x920x140	2	-	-	-	96	1850	950	1250	168
170	300345	OLIFOLO basic 90	130x160x1050	2	-	-	-	96	1850	1060	1250	192
170	300346	OLIFOLO basic 100	160x160x1140	2	-	-	-	96	1850	1150	1250	192

OLIFOLO wall

171	300350	OLIFOLO wall 30	130x420x240	3	-	-	-	-	112	1850	850	1200	338
171	300300	Support legs	-	-	-	-	-	-	-	-	-	-	-

OLIFOLO square

171	300360	OLIFOLO square 20	130x420x240	2	-	-	-	-	240	1850	1000	1200	409
-----	--------	-------------------	-------------	---	---	---	---	---	-----	------	------	------	-----

WARRANTY TERMS

1. WARRANTY PERIODS for OLI products:

- a.In-wall flushing cisterns, bidet, washbasin and urinal frames - 10 (ten) years;
- b.Exposed flushing cisterns- 5 (five) years;
- c.Flushing mechanisms (inlet valves and outlet valves) – 10 (ten) years;
- d.Electronic components, fixtures, and fast-wearing parts, specifically rubber seals or similar products, push-buttons and control plates – 2 (two) years;
- e.All other products – 2 (two) years;

2.The warranty period starts on the purchase date by the first final Consumer. The sales document, corroborating the sales date of the OLI product and the respective serial number, certifies the start date of the warranty. In the event of a subsequent purchase, or any alteration in proprietorship or user, the warranty period shall continue for the remainder of the warranty period and shall continue unaltered relative to all other aspects of the warranty.

3.This warranty is also applicable to subsequent substitution parts for those determined to be defective until the end of the warranty period for the product of which they are a part, or up to two years after their application if the remaining warranty period for the product is less than two years. The repair or substitution of a product or a part does not renew the initial warranty period.

4.This warranty is only valid if the product has been correctly installed, in accordance with the installation instructions and the information contained in the catalogues and manuals provided by OLI. In situations where information is not covered in the aforementioned resources, installation should be carried out in accordance with the standards, rules and technical specifications contained in the legislation in effect, applicable to the type of devices and mechanisms in question. Before being sold, products must be stored in a dry place.

5.The applicability of this warranty also depends on the use considered to be normal for the products, the operating conditions (ex. pressure, temperature, etc.) and the type of liquid used, which should have values within the parameters indicated in the catalogues or manuals provided by OLI.

6.If the flush pipes are used for other liquids other than network water, the standards relative to the resistance of polyethylene (PE), polypropylene (PP) and polyvinyl chloride (PVC) should always be respected.

7.Products with missing parts or which are defective at the time of installation, as well as during pressure tests, should not be used.

8.OLI products should not be used with other products which do not have local national Quality Approvals/Certificates.

9.Any product return should be accompanied by a copy of the sales receipt, with the product in its original packaging, whenever possible.

10.This warranty is immediately terminated and is not extended to any equipment or part that has been damaged or become inoperative as

a result of the following:

- a) Accident, fall, fire, flooding and inappropriate, abusive or negligent use;
- b) Use of parts or accessories which have not been manufactured or provided by OLI, or whose provision and/or manufacture have not been expressly authorised by OLI;
- c) Unauthorised alterations to the equipment;
- d) Breaking of any warranty seal or removal of any label with the serial number or legally mandatory marking;
- e) Assistance, repairs or substitutions carried out by third parties other than OLI, an authorised reseller or certified technical centre.

11.Under no circumstances does the warranty cover the product's installation.

12.The products are packaged in duly identified packages which fulfil the requirements established in applicable national legislation. OLI cannot be held responsible for material or personal damage resulting from the incorrect or inappropriate use of the packages.

13.Failure to comply with any of the aforementioned clauses releases OLI from responsibilities pertaining to material damage and/or non-material damage which may result.

14.OLI recommends that the packaging materials of its products, after no longer being needed, should be recycled by the appropriate and socially responsible means and processes.

15.In the case of defects or non-conformity of OLI products, a written notification should be sent to the sales representative or OLI client manager within 60 days of becoming aware of the defect, as long as it was not previously visible, within reason. The appropriate measure shall then be taken to determine the possible defects detected. The notification may also occur by telephone, followed by a registered letter with acknowledgment of receipt within 24 hours to Customer Service, OLI – Sistemas Sanitários, S.A., Travessa do Milão, Esgueira, 3800-314 Aveiro (Portugal)

16.Failure to comply with the terms of the aforementioned number may result in the total or partial loss of the right to compensation or of the warranty itself.

17.The notification mentioned in Point 15 of this Warranty, issued by means of registered letter to OLI's Customer Service should contain the following information:

- a) Name, address and telephone number of the claimant;
- b) Identification of the product;
- c) Entity and place where the product was acquired (when not at OLI), as well as the respective purchase date;
- d) Address of the location where the product was installed;
- e) Description of the visible losses;
- f) Type of installation and the materials used (if the claimant has this information);
- g) Conditions of use, ex. type of system, pressure, temperature, etc. (if the claimant has this information);
- h) Name, address and telephone number of the company or person who installed the product.

18.Any personal information provided shall be used solely for processing the claim and for contact with the claimant and may be transmitted to the insurance provider to which civil responsibility for damages has been transferred.

19.Any obligation to repair, substitute, reduce the price or reimburse, if this should be the case, shall occur only for OLI products which have a visible marking or identifying logotype, with defects or non-conformities which have been proved through extensive technical verification. If it is concluded that the product is not defective, the expenses paid by OLI shall be invoiced to the claimant. The product's technical standards at the time of its manufacture shall be the basis for its conformity assessment.

20.OLI cannot be directly held responsible by the purchaser if the product's non-conformity results from actions by the resellers (or other commercial agents) of OLI products, namely when non-conformity results from statements made by the sales representative regarding the product, its qualities and use conditions, which are different from the product's indications and instructions, including the information contained in manuals and instruction guides provided with the products or published on the company's website.

21.The consumer's rights and obligations are established in the Legal Regime for the Sale and Warranty of Consumer Goods (Law-Decree No 67/2003, of 8th April, and its subsequent alterations, specifically those foreseen by Law-Decree No 84/2008, of 21st May), as well as the Consumer Protection Act (Law No 24/96, of 31st July).

22.Any litigation resulting from the terms or interpretation of the present warranty, or of the purchase and sales contract from which the warranty results, is regulated by Portuguese law and resolved in the court of the competent legal jurisdiction where the headquarters of the warranty provider, OLI, are located, with express waiver of any other, except in cases where OLI and the beneficiary of the warranty have agreed to settle the litigation in an arbitration court.

23.This warranty binds OLI according to its exact terms, except typographical errors.

NOTES



Inspired by water...



For decades, OLI has been developing and producing sanitary installation systems aimed at innovation. The dual flush cistern and the inlet valve were two major inventions. Currently, OLI is a worldwide reference. OLI currently has over 34 active patents in Europe resulting from a continuous investment in Research and Development, guided by the constant challenge of water sustainability. Its know-how is acknowledged by its means and technologically advanced resources and the partnerships established with universities and research centres. In its factory in Aveiro, OLI controls the value chain: there, the idea emerges, the mould is produced, production takes place and the product is marketed in over 80 markets throughout the five continents. The rising importance of contemporary design and of the incorporation of new technologies and materials, clearly shown in the solutions presented in this catalogue, reaffirm OLI as a brand of excellence.

C.0050.06-01.2020
ZB030000000002



OLI-Sistemas Sanitários, S.A.
Travessa do Milão, Esgueira
3800-314 Aveiro, Portugal

T (+351) 234 300 200
F (+351) 234 300 212
www.oli-world.com
export@oli-world.com

Inspired by water...